

NanoSpeed™ Fiber Optical Switch Array

(SMF, PMF, MM, 450-2000 nm, Bidirectional)



DATASHEET

[Return to the Webpage](#)



Features

- High Speed
- High Reliability
- Low Loss
- Compact

Applications

- Instrumentation
- Power balance
- Sensor



Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

The NS fiber optical switch array cascades multiple 1x2 or 2x2 switches to redirect an incoming optical signal among N output optical fibers rapidly controlled. It mounts multiple switches on a PCB controlled by a TTL input signal via a single SMC connector. This array is designed as a compact OEM module. The all-solid-state crystal design provides exceptionally high reliability. The switch has passed Telcordia reliability qualification tests and is used in space applications. It is designed to meet the most demanding ultra-high reliability requirements, fast response time, and continuous operation. The unit comes with a wall plug-in power supply. Available with several electronic drivers having performance optimized for various repetition rates. No GUI is available due to high speed. The switch is intrinsically bidirectional and selectable for polarization-independent or polarization-maintain by the fiber type.

The rise/fall time is intrinsically related to the crystal properties, and the repetition rate is associated with the driver. There are poor frequency response sections due to the device resonances. The NS devices are shipped mounted on a tuned driver.

The NS series switches respond to a control signal with any arbitrary timing with frequency from DC up to MHz. The switch is usually mounted on a tuned driver before shipping. The electrical power consumption is related to the repetition rate at which the switch is operated.

The dual-stage configuration increases the extinction ratio or cross-talk value.

Specifications

Parameter		Min	Typical	Max	Unit
Central Wavelength		450		2000	nm
Insertion Loss ^[1]	1700~2300nm		0.8	1.8	dB
	1260~1650nm		0.6	1	
	900~1260nm		0.8	1.3	
	760~900nm		1	1.6	
	650~850nm		1.5	2.2	
	450~580nm		2	2.8	
Cross Talk On/Off Ratio ^[2]		18	25	35	dB
Durability		10 ¹⁴			cycles
Optical Response (Rise, Fall) ^[3]		50		100	ns
Electrical-Optical Delay				250	ns
Repetition Rate		DC	20	300	kHz
Polarization Dependent Loss			0.1	0.35	dB
IL Temperature Dependency			0.25	0.5	dB
Polarization Mode Dispersion			0.1	0.2	Ps
Return Loss		45	50	60	dB
Optical Power Handling ^[4]			0.3	20	W
Operating Temperature ^[5]		-5		45	°C
Storage Temperature		-40		85	°C
Package Dimension		See mechanical dimension			mm

Notes:

[1] Excluding connectors.

[2] ±25nm, Cross talk is measured at 5kHz, which may be degraded at the high repeat rate.

[3] The rise/fall time does not include electrical signal delay

[4] Defined at 1310/1550nm. For the shorter wavelength, the handling power may be reduced.

[5] The switches can be operated in a wider temperature range from as -10 to 70°C, but some performances such as on/off ratio will be degraded.

Warning: This is an OEM module designed for system integration. Do not touch the PCB by hand. The electrical static can kill the chips even without a power plug-in. Unpleasant electrical shock may also be felt. For laboratory use, please buy a Turnkey system.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 06/09/26

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


NanoSpeed™ Fiber Optical Switch Array

(SMF, PMF, MM, 450-2000 nm, Bidirectional)




DATASHEET

Mechanical Dimensions (mm)

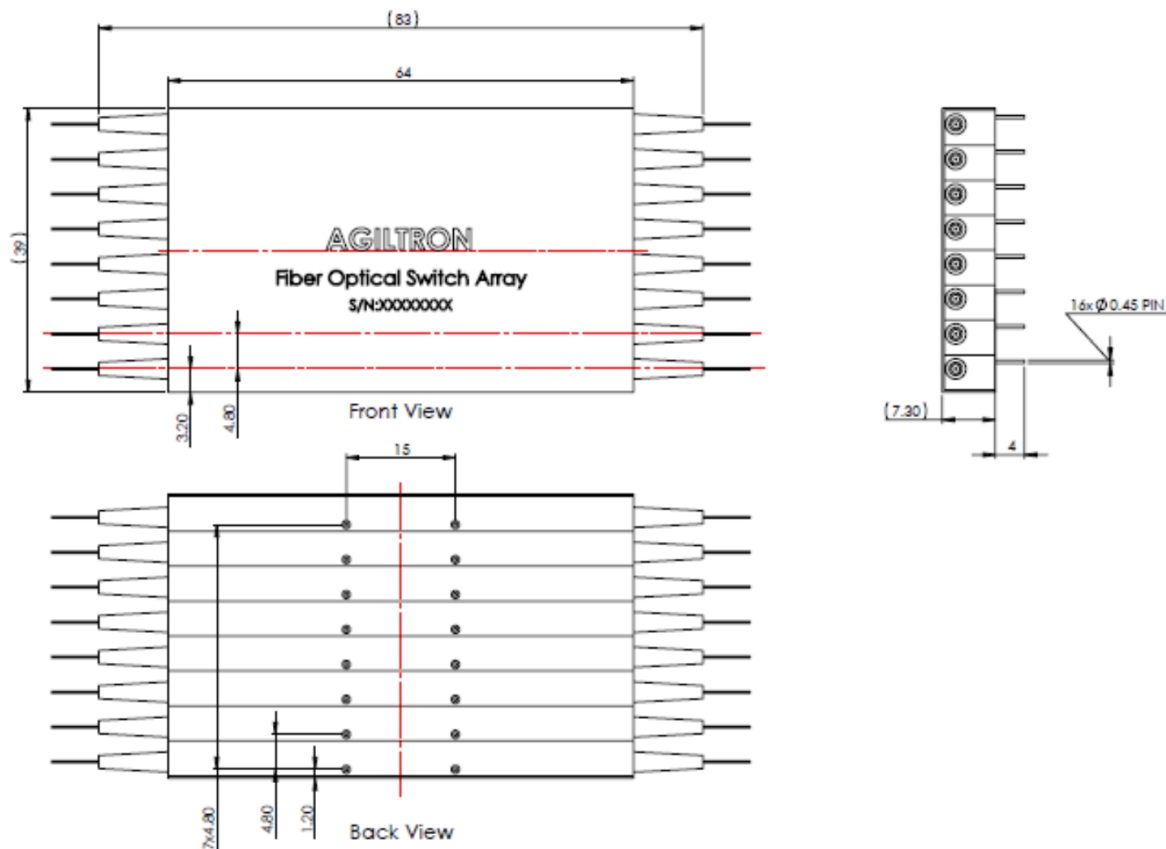

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Typical Speed Response Measurement

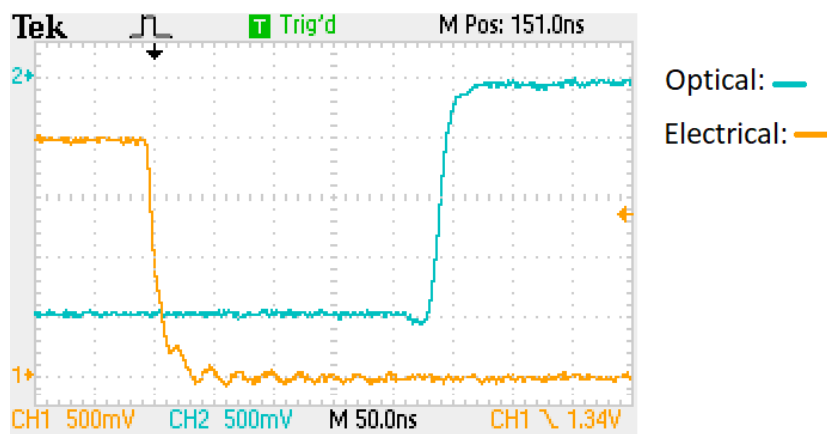

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

NanoSpeed™ Fiber Optical Switch Array

(SMF, PMF, MM, 450-2000 nm, Bidirectional)



DATASHEET

Ordering Information (Part Number)

Prefix	Type	Channel	Wavelength	Repetition/Rise Time	Fiber Type	Fiber Cover	Fiber Length	Connector ^{[1][2]}	Optical Power	Benchtop
NSAS-	1x2 = 1 2x2 = 2 1x2mini = 4 2x2mini = 8	4 = 04 8 = 08 12 = 12	1060 = 1 2000 = 2 1310 = 3 1480 = 4 1550 = 5 1625 = 6 1750 = A 780 = 7 850 = 8 650 = E 550 = F 400 = G 1565~1620 = L Special = 0	50kHz (100ns) = 1 100kHz(100ns) = 2 300kHz (100ns) = 3	SMF-28 = 1 HI1060 = 2 HI780 = 3 PM1550 = 5 PM850 = 8 PM980 = 9 MM50/125 ^[3] = M Special = 0	Bare fiber = 1 900um tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 Duplex LC/PC = 8 LC/APC = 9 E2000 APC = A LC/UPC = U Special = 0	Regular = 1 1W = A 2W = B 5W = C 10W = D 20W = E	None = 1 Benchtop = B

[1]. Regular fiber connector has PER ~22dB. Connector with PER >27 dB is available using special process



[2]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

[3]. For laser with mode fill ratio CPR <14

Note:

- ☐ **PM1550** fiber works well for **1310nm**

Benchtop Box Mechanical Dimension

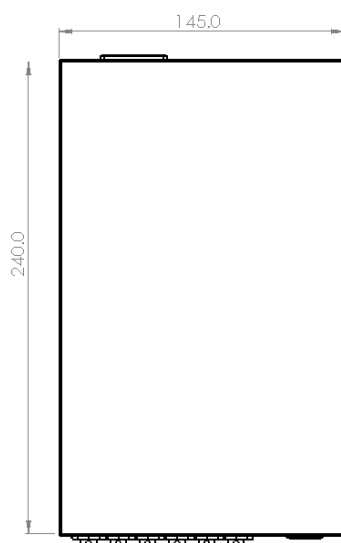

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

☎ +1 781-935-1200

✉ sales@agiltron.com

🌐 www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


NanoSpeed™ Fiber Optical Switch Array

(SMF, PMF, MM, 450-2000 nm, Bidirectional)




DATASHEET

Optical Power Handling vs Wavelength For Single-Mode Fibers

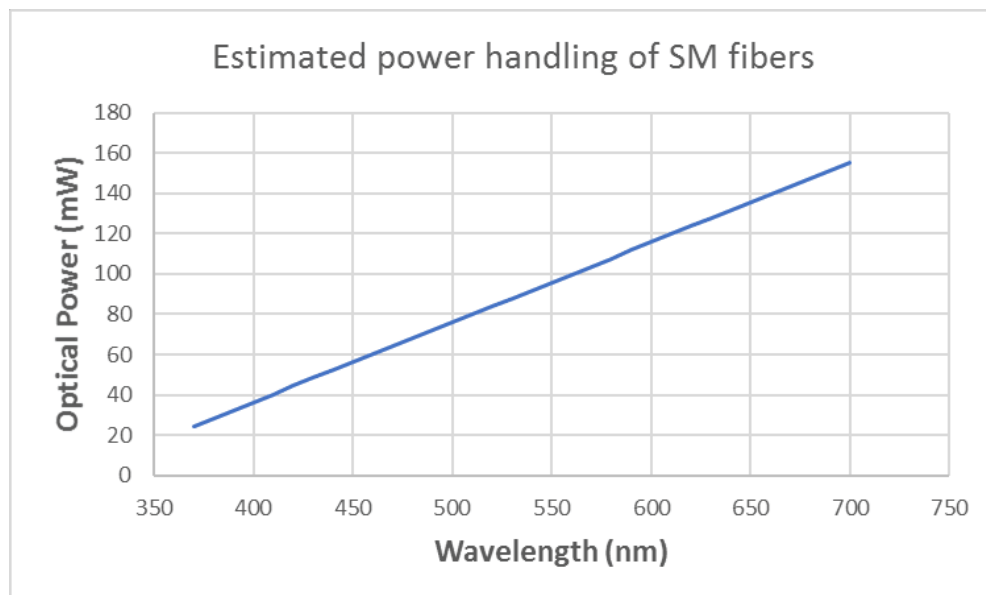

Wavelength Dependence of CT

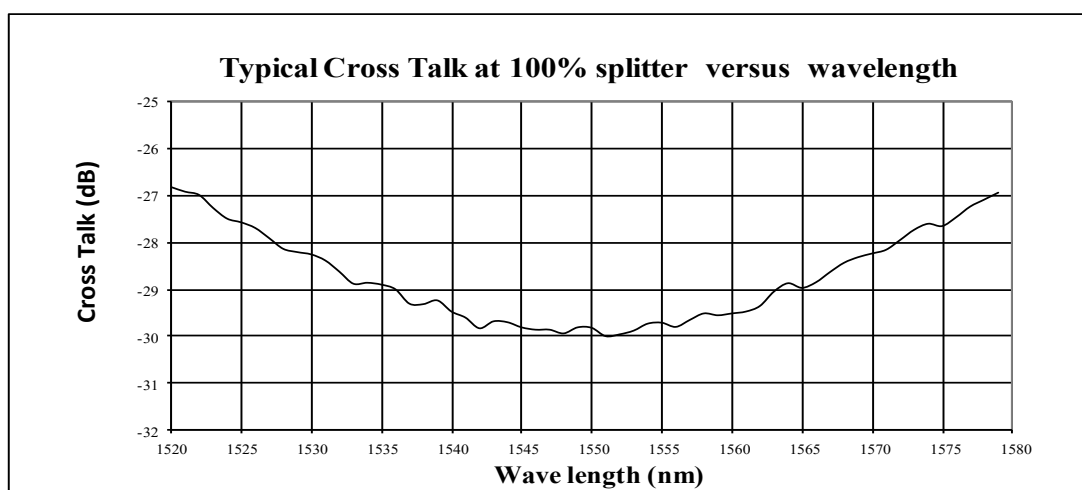

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

NanoSpeed™ Fiber Optical Switch Array

(SMF, PMF, MM, 450-2000 nm, Bidirectional)



DATASHEET

Q & A

Q: Does NS device drift over time and temperature?

A: NS devices are based on electro-optical crystal materials that can be influenced to a certain range by the environmental variations. The insertion loss of the device is only affected by the thermal expansion induced miss-alignment. For extended temperature operation, we offer special packaging to -40 -100 °C. The extinction or cross-talk value is affected by many EO material characters, including temperature-dependent birefringence, Vp, temperature gradient, optical power, at resonance points (electronic). However, the devices are designed to meet the minimum extinction/cross-talk stated on the spec sheets. It is important to avoid a temperature gradient along the device length.

Q: What is the actual applying voltage on the device?

A: 100 to 400V depending on the version.

Q: How does the device work?

A: NS devices are not based on Mach-Zander Interference, rather birefringence crystal's nature beam displacement, in which the crystal creates two different paths for beams with different polarization orientations.

Q: What is the limitation for faster operation?

A: NS devices have been tested to have an optical response of about 300 ps. However, practical implementation limits the response speeds. It is possible to achieve a much faster response when operated at partial extinction value. We also offer resonance devices over 20MHz with low electrical power consumption.

Operation Manual

1. Connect a control signal to the SMA connector on the PCB.
2. Attach the accompanied power supply (typically a wall-pluggable unit).
3. The device should then function properly.

Note: Do not alter device factory settings.

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 µm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.