

1x2 / 2x2 Single Mode Standard Fiber Optic Coupler/Splitter

(1310-2000nm)



DATASHEET

[Return to the Webpage](#)



Features

- Wavelength Independent
- Low Insertion Loss
- Low PDL
- Highly Stable & Reliable
- Ultra Low Cost

Applications

- Optical communications
- FTTX
- Local Access Network (LAN)
- Fiberoptic Instrumentation



Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 02/11/26

The FC Series fiber optic coupler is based on Agiltron's fused biconical taper technology and compact packaging structure. It features good uniformity, low excess loss and very low polarization sensitivity. The device is ideal for splitting or combining light with exceptional performance over a wide wavelength range.

Couplers are highly efficient in splitting light with little loss, about 0.2dB per joint, but incur significant losses when combining lights; for example, a 50/50 coupler produces a 50% loss to each beam when combined. For beam-combining applications, search Combiner.

Specifications

Parameter		Premium	Grade A	Unit
Splitting Ratio		0.5/99.0 to 50/50		
Bandwidth		1310-2000 ± 40		nm
Excess Loss ^[1]		0.07	0.1	dB
Insertion Loss ^[1]	50/50	3.4/3.4	3.6/3.6	dB
	40/60	4.4/2.5	4.8/2.8	dB
	30/70	5.6/1.8	6.1/2.0	dB
	20/80	7.5/1.2	8.0/1.3	dB
	10/90	10.8/0.6	12.0/0.8	dB
	5/95	14.6/0.4	18.4/0.5	dB
	4/96	16.0/0.3	19.0/0.4	dB
	3/97	17.5/0.3	19.5/0.4	dB
	2/98	19.0/0.2	20.0/0.3	dB
	1/99	21.5/0.2	22.0/0.3	dB
		0.5/99.5	24.0/0.3	dB
Polarization Dependent Loss		0.1	0.15	dB
Uniformity		0.6	1.0	dB
Optical Power Handling		5		W
Operating Temperature		-40~85		°C
Storage Temperature		-50~85		°C

Notes:

[1]. Without connector. Each connector adds 0.3dB and 0.5dB for short wavelength

* Other package options available on request

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


1x2 / 2x2 Single Mode Standard Fiber Optic Coupler/Splitter

(1310-2000nm)



DATASHEET

Mechanical Dimensions (mm)

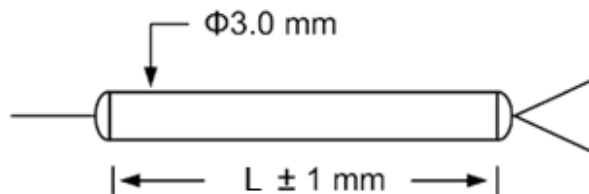

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information (Part Number)

Prefix	Port	Wavelength	Grade	Package ^[1]	Splitting Ratio	Fiber Type	Fiber Cover	Fiber Length	Connector ^[7]
FCSB-	1x2 = 1 2x2 = 2	1625nm = 8 1590nm = 2 1570nm = 3 1550nm = 4 1480nm = 5 1475nm = 6 1310nm = 7 2000nm = P Special = 0	P Grade = P A Grade = A Space ^[2] = S	54(L) = 1 70(L) = 2 90(L) = 3 40(L) ^[3] = 4 30(L) = 5 Special = 0	01/99 = 1 02/98 = 2 05/95 = 3 10/90 = 4 20/80 = 5 30/70 = 6 40/60 = 7 50/50 = 8 0.5/99.5 = 9 3/97 = A 4/96 = B Special = 0	SM28 = 1 SM1950 = 2	250μm fiber ^[4] = 1 900μm tube ^[5] = 2 3mm cable ^[6] = 4 Special = 0	0.5m = 1 0.75m = 2 1.0m = 3 Special = 0	None = 0 FC/PC = 1 FC/SPC = 2 FC/APC = 3 FC/UPC = 4 SC/SPC = 5 SC/APC = 6 SC/UPC = 7 ST = 8 MU = 9 LC/PC = B LC/APC = A LC/UPC = U

[1]. Standard couplers are supplied with bare-fiber pigtails. Adding protective tubing will typically increase the package size and cost.

[2]. Aerospace-grade package featuring an aluminum metal casing filled with a specially formulated RTV compound that is both vibration-resistant and thermally conductive, specifically designed to endure repeated thermal shock cycles from -45°C to 90°C.

[3]. Only for bare fiber.

[4]. 250μm 3*40mm Input(Input1) black, Input2 clear (no this port if chose 1x2 instead of 2x2), Out1 red (large ratio), Out2 blue (small ratio), coloring start 10cm from steel tube and coloring length 10cm.

[5]. 900μm 3*54mm Input(Input1) black jacket, Input2 white (no this port if chose 1x2 coupler instead of 2x2), Out1 red (large ratio), Out2 blue (small ratio).

[6]. 3mm 90*16*9 ABS Box, all yellow jacket with label mark.

[7]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

1x2 / 2x2 Single Mode Standard Fiber Optic Coupler/Splitter

(1310-2000nm)



DATASHEET

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters ($<5 \mu\text{m}$) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.