

8 Channel MEMS Variable Attenuation Array

(Compact Size, 8 channels, 0-5V, 780-2640nm, 40/70dB attenuation, SM, MM, PM)



(Protected by U.S. patent 8,666,218 and other patents pending)

DATASHEET

[Return to the Webpage](#)



Features

- Low Loss
- High Reliability
- Low Power Consumption
- Compact

Applications

- Gain Control
- Power Equalizer

The MEMS series VOA array utilizes a micro-electro-mechanical mechanism with a compact design, simple construction, and easy direct drive, delivering exceptional optical performance. We offer two versions: one with high repeatability and attenuation of up to 40dB and another less precise version with up to 70 dB attenuation. Each channel in the VOA is controlled by directly applying an electrical voltage.

The MEMS series VOA array complies with Telcordia 1209 and 1221 reliability standards.

A version designed for reliable operation in vibration-prone environments is available as an option.

Specifications

Parameter	Min	Typical	Max	Unit
Operating Wavelength	850~1310, 1260~1620			nm
Insertion Loss (without connector)		0.6	0.8	dB
Attenuation Dynamic Range	45	50	60	dB
Repeatability (0-60 °C)		0.3	0.5	dB
Polarization Dependent Loss (SM, 0~15dB)		0.1	0.2	dB
Extinction Ratio (PM)	18	22		dB
Return Loss	SM, PM:	50		dB
	MM:	35		dB
Wavelength Dependent Loss ^[1]		0.45	0.8	dB
Response Time (0~20dB)		1	3	ms
Optical Power Handling (CW)		300	400	mW/ch
Polarization Mode Dispersion		≤ 0.05		ps
Optical Cross Talk		≥ 65		dB
Attenuation Resolution		Continuous		dB
Max. Power Consumption		< 0.2 ^[2]		W
Electric Power Input (DC)		5		V
Electrical Control Signal		0 ~ 5		V
Operating Temperature		-20 ~ +75		°C
Storage Temperature		-40 ~ +85		°C
Relative Humidity Range		0 ~ 85		%

Notes:

[1]. Within 40nm band, 0~20dB

[2]. At the maximum attenuation 50dB for all 8 channels



Rev 06/16/26

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

8 Channel MEMS Variable Attenuation Array


(Compact Size, 8 channels, 0-5V, 780-2640nm, 40/70dB attenuation, SM, MM, PM)



(Protected by U.S. patent 8,666,218 and other patents pending)

DATASHEET

Dimensions (mm)

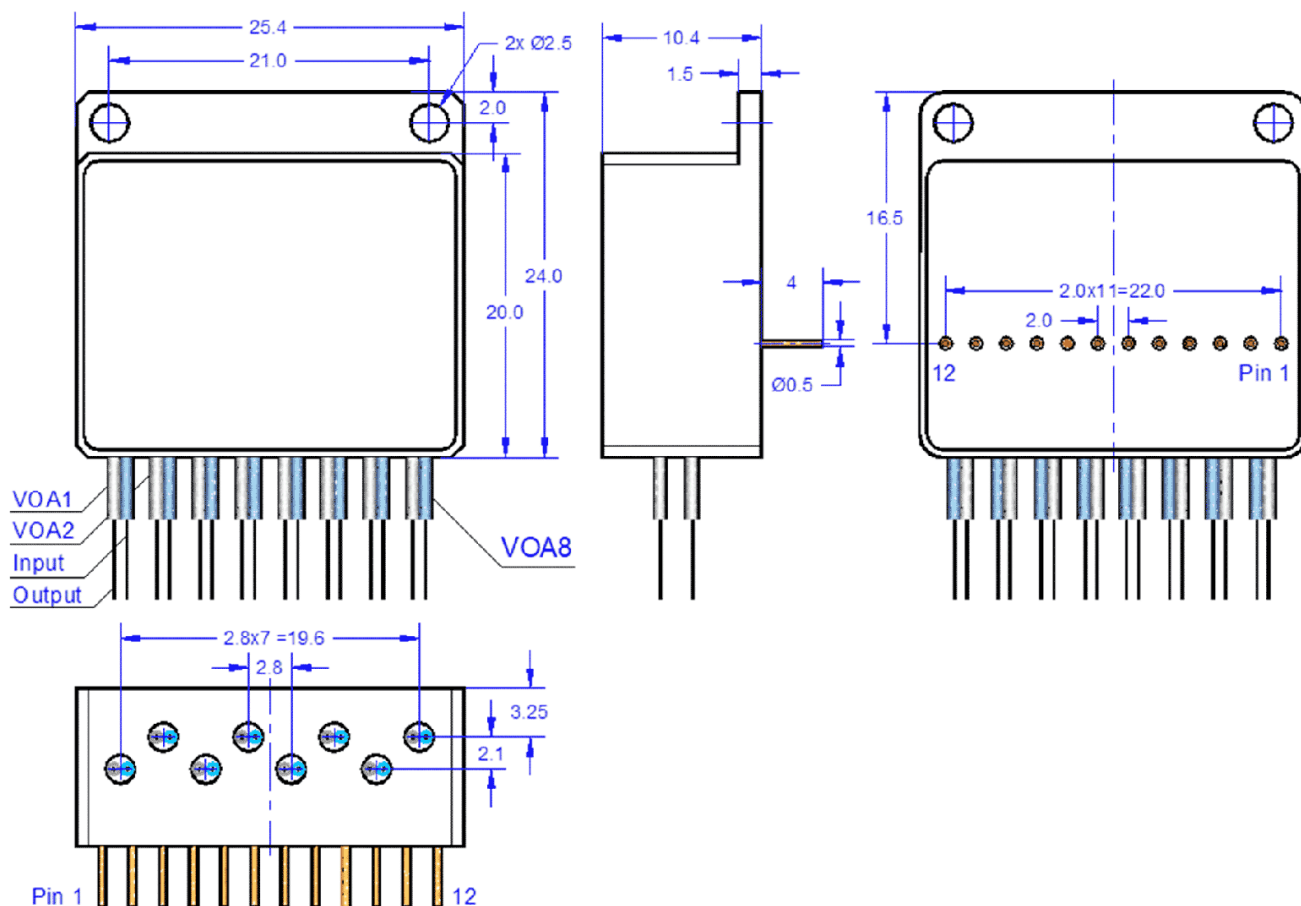

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Driving Instruction

Pin 1	VOA 1 (0 ~ 5V)	Pin 7	VOA 5 (0 ~ 5V)
Pin 2	VOA 2 (0 ~ 5V)	Pin 8	VOA 6 (0 ~ 5V)
Pin 3	VOA 3 (0 ~ 5V)	Pin 9	VOA 7 (0 ~ 5V)
Pin 4	VOA 4 (0 ~ 5V)	Pin 10	VOA 8 (0 ~ 5V)
Pin 5	GND	Pin 11	GND
Pin 6	GND	Pin 12	5V power supply

NOTE: The control signal current is less than 0.2mA

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

8 Channel MEMS Variable Attenuation Array

(Compact Size, 8 channels, 0-5V, 780-2640nm, 40/70dB attenuation, SM, MM, PM)




(Protected by U.S. patent 8,666,218 and other patents pending)


DATASHEET

VOA array typical attenuation curve

8-Channel MEMS VOA array typical attenuation curve

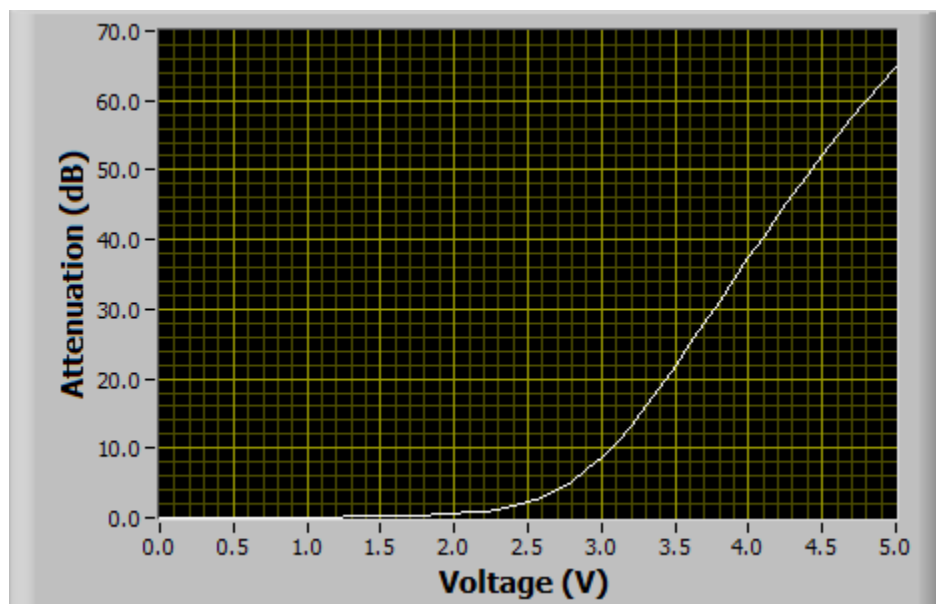

Typical Insertion Loss vs Wavelength (1240-1630nm)

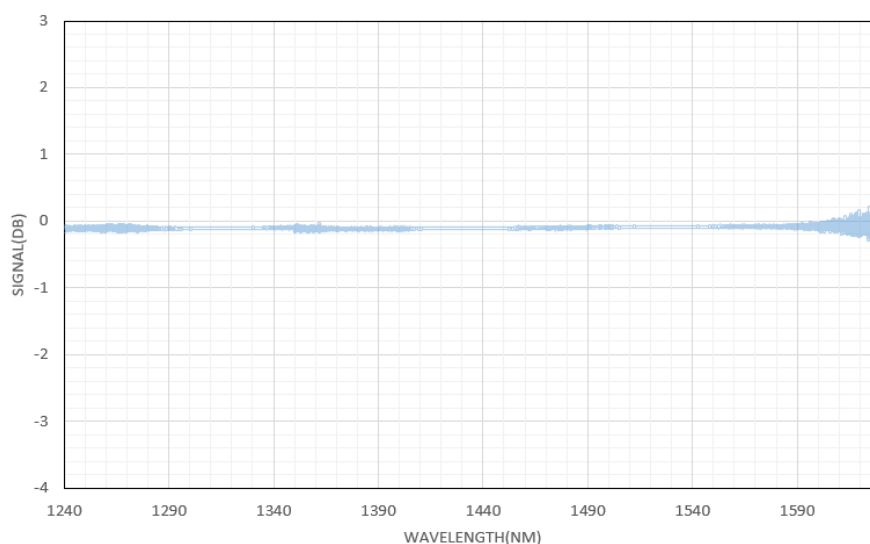

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

8 Channel MEMS Variable Attenuation Array

(Compact Size, 8 channels, 0-5V, 780-2640nm, 40/70dB attenuation, SM, MM, PM)



(Protected by U.S. patent 8,666,218 and other patents pending)

DATASHEET

Ordering Information (Part Number)

Prefix	Type	Wavelength	Off State	Attenuation	Fiber Type	Fiber Cover	Fiber Length	Connector ^[2]
VOAA-	8-ch = 08 7-ch = 07 6-ch = 06 5-ch = 05 4-ch = 04 3-ch = 03 2-ch = 02 V8-ch ^[1] = V8	1060 = 1 C+L = 2 1310 = 3 1550 = 5 780 = 7 850 = 8 850~1310 = A 1260~1620 = B Special = 0	Transparent = 1 Opaque = 2 Special = 0	45dB = 8 60dB = 6	SMF28 = 1 HI1060 = 2 HI780 = 3 MM50/125 = 5 MM62.5/125 = 6 PM1550 = B PM1310 = D PM980 = E PM850 = F PM780 = A Special = 0	Bare fiber = 1 0.9mm tube = 3 Special = 0	0.25 m = 1 0.5 m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 Duplex LC/PC = 8 LC/APC = A LC/UPC = U Special = 0

[1]. For operating in vibration environment

[2]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

Note:

“transparent” means no attenuation without applying a controlling voltage-off state, the “opaque” means the highest attenuation without applying a controlling voltage.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.