

35GHz Photoreceiver Module-SM

Analog up to 35 GHz bandwidth, digital 40GHz, SM28, 50/125 fiber



DATASHEET

[Return to the Webpage](#)



The HPRM is a turnkey high-speed photoreceiver engineered for advanced analog and digital applications. It supports both single-mode and multimode fiber coupling configurations. With its high conversion gain and low input-referred noise, the HPRM delivers exceptional linearity and precision. The module offers 35 GHz analog bandwidth and 3000 V/W differential conversion gain, enabling digital modulation rates up to 40 Gbps. The differential RF output utilizes dual GPPO connectors (+ and -) to minimize susceptibility to external noise and electromagnetic interference (EMI), providing excellent common-mode rejection for superior signal integrity. For added flexibility, either connector can also be used as a single-ended output relative to ground. The unit includes a pluggable low-noise power supply, ensuring simple, reliable plug-and-play operation.

Features

- Up to 35 GHz Analog Bandwidth
- Up to 40 GHz Digital Rate
- High Linearity
- Differential Low Noise Output

Applications

- 40 Gbps DPSK
- Pulse Amplitude Modulation (PAM) Détection
- 30 GHz RF over fiber link

Specifications

Parameter	Min	Typical	Max	Unit
Optimized Operating Wavelength	1250		1650	nm
Optical Input Level			+7	dBm
S21 3 dB Bandwidth		35		GHz
Differential Conversion Gain		3000		V/W
Optical Return Loss		30		dB
Optical PDL @ 1550 nm			0.25	dB
Output Return Loss (up to 25 GHz)	-10			dB
Differential Output Voltage			1800	mVpp
Impedance		50		Ω
Output Coupling	DC (external AC coupling required)			V
Equivalent Input Noise Density			32	pA/√Hz
Noise Equivalent Power (NEP) @ 1GHz		17		pA/√Hz
Operating Temperature	0		50	°C
Storage Temperature	-55		85	°C
Power Supply Requirements		5		V
Optical Connector		FC/APC		
RF Connector		2.92 mm, Female (K/SMA Compatible), GPPO		
Input Optical Power			10	mW
Humidity		95		%



Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 04/21/26

[+1 781-935-1200](tel:+17819351200)

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


35GHz Photoreceiver Module-SM

Analog up to 35 GHz bandwidth, digital 40GHz, SM28, 50/125 fiber




DATASHEET

Dimensions (mm)

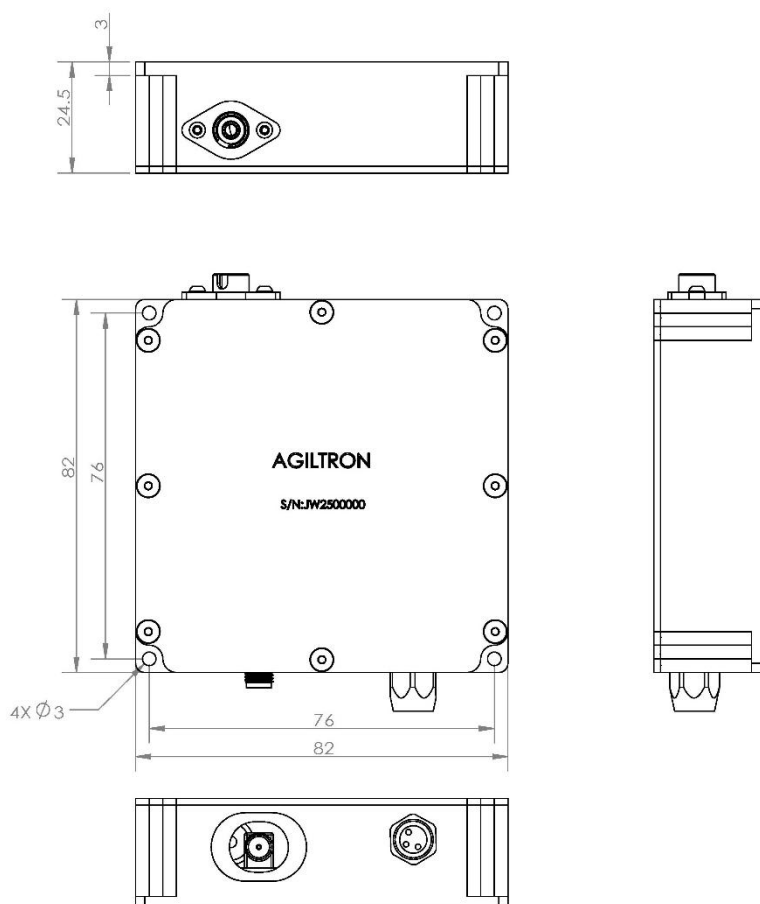

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Function Diagram

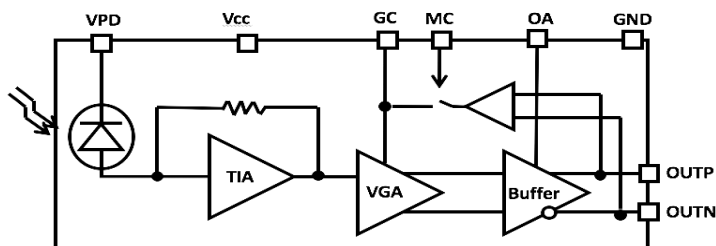

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


35GHz Photoreceiver Module-SM

Analog up to 35 GHz bandwidth, digital 40GHz, SM28, 50/125 fiber



DATASHEET

S21 Graph

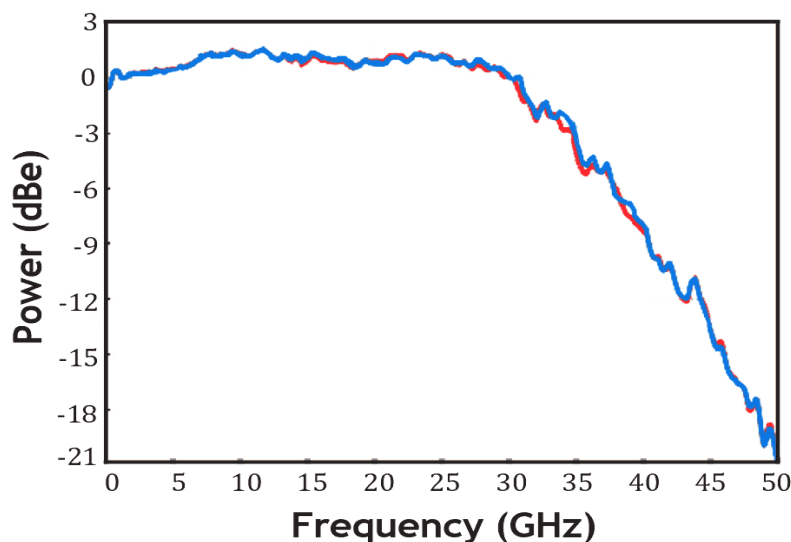

Ordering Information (Part Number)

	1	1	35	1	2	2	1	☐	☐
Prefix	Detector Type	Wavelength Range	Bandwidth	Module *		Configuration	Fiber	Connector ^{[1] [2]}	RF Connector
HPRM-	PIN = 1 APD = 2	1200-1600nm = 1	35GHz = 35		Non = 1 Yes = 2	Differential = 2	SM28 =1 50/125 =2	FC/APC = 3 FC/PC =2 Special = 0	GPPO = G K = 2

[1]. Default connector for SM is FC/APC, and For MM is FC/PC

[2]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

35GHz Photoreceiver Module-SM

Analog up to 35 GHz bandwidth, digital 40GHz, SM28, 50/125 fiber



DATASHEET

Operation Instruction

1. Connect the optical fiber input port to the signal source.
2. Connect the RF output port to the readout instrument.
3. Plug in the provided power supply to power the device. The LED will turn on.
4. The unit will operate with the performance specified in the test report.
5. If the device is not working, contact us via the sales email. **Do not open the enclosure** — doing so will invalidate the one-year warranty.

Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. This device has been classified with the FDA/CDRH under accession number 0220191. All versions of this laser are Class 1M laser products, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example telescopes and binoculars) may pose an eye hazard.

Wavelength = 1.3/1.5 μm .

Maximum power = 30 mW.



+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

35GHz Photoreceiver Module-SM

Analog up to 35 GHz bandwidth, digital 40GHz, SM28, 50/125 fiber



DATASHEET

Caution Electrostatic Sensitivity



- Never touch laser diode and the module using hands
- Always use protections when handle a photodiode
- Recommend mounting the laser diode using an ionic gun and ESD finger cots



P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.