

AO-355B/1W/3W/5W



LD PUMPED ALL-SOLID-STATE
AOM Q-SWITCHED LASER

All solid state AOM Q-switched laser at 355 nm has the features of high peak power, high repetition rate, and short pulse duration, which is used in scientific research, biology, instrumentation, 3D marking, laser marking, sub-surface engraving and so on.




SPECIFICATIONS

Wavelength (nm)	355±1			
Operating mode	Actively			
Average power (W)	1@1kHz	3@5kHz	3@30kHz	5@30kHz
	Average power (W) = Single pulse energy (mJ) * Rep. rate (kHz)			
Single pulse energy (μJ)	>1000@1kHz	>600@5kHz	>100@30kHz	>160@30kHz
Rep. rate ¹	1-10kHz		20-200kHz	
Pulse width (ns) ²	~12@1kHz	~15@5kHz	~12@30kHz	~15@30kHz
Peak power (kW)	~80@1kHz	~40@5kHz	~10@30kHz	~10@30kHz
Power stability (rms, 4 hours ± 3°C)	<2%, <1%			
Transverse mode	TEM ₀₀			
Beam Circularity (%)	>90			
Beam divergence, full angle (mrad)	<3.5			
Beam diameter at the aperture (mm)	~0.8			
M ²	<1.2			
Polarization ratio	>100:1 Horizontal			
Beam height from base plate (mm)	79			
Warm-up time (minutes)	<10			
Cooling method	Air cooled			
Environment temperature (°C)	10-35			
Operating voltage (VDC)	12V/29A			
Expected lifetime (hours)	>10000			




LASER HEAD (Driver Integrated)

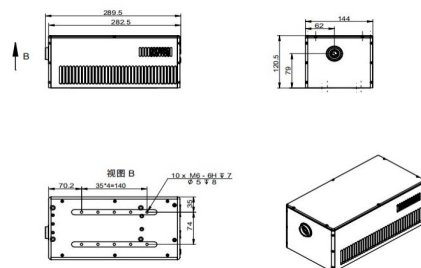


289.5 (L) × 144 (W) × 120.5 (H) mm³, 7.35kg

POWER SUPPLY
PSU-12 (100-240VAC) optional

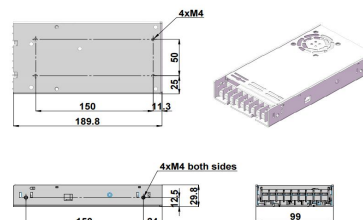

189.8 (L) × 99 (W) × 29.8 (H) mm³, 0.8 kg

POWER SUPPLY
PSU-12-P³ (100-240VAC) optional

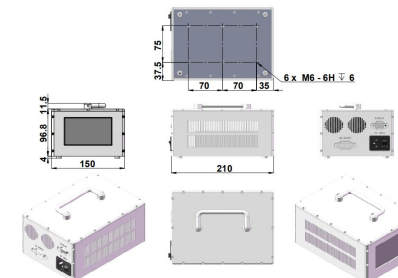

210 (L) × 150 (W) × 112.3 (H) mm³, 2.75 kg

1 Other rep.rate range available on request.

2 Pulse width not tunable, the value varies with different frequency.

3 Parameters can be adjusted.(on/off, Rep. Rate, etc.)

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068