

Fiber-Fiber™ Large Core No-Gap Compact Fiber Optical Switch

(up to 0.5 mm diameter, ultra-broadband UV-IR, 1x1, 1x2, 1x3, bidirectional)

(Protected by U.S. patent 6823102 and pending patents)



DATASHEET

[Return to the Webpage](#)



Applications

- Sensor System
- Spectrometer
- Instrumentation

Features

- Low Optical Distortions
- 8 Ports Integration
- High Isolation
- High Reliability
- Fail-Safe Latching
- Epoxy-Free Optical Path
- Low Cost



Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 02/10/26

The LCFF Series fiber optic switch provides exceptional performance with ultra-broadband coverage from UV to IR, low optical loss, minimal temperature dependence, high on/off ratio, vibration insensitivity, and compact size. It connects optical channels through direct fiber-to-fiber coupling, where the light path is continuous with index-matching liquid filling the tiny gap between the coupling fibers, eliminating unwanted surface reflection issues. Channel switching is activated via an electrical relay, and the latching operation preserves the selected optical path after the electrical power is removed. The switch is bidirectional and conveniently controllable by a 4.5V signal. The LCFF Series switch accommodates large-core fibers ranging from 0.2 to 0.4mm in diameter, with transmission characteristics identical to fiber. The platform is robust, insensitive to temperature and vibration, and available in compact configurations of 1x1, 1x2, 1x3, and 1x4. For 1xN applications, a larger format is available.

This switch uses a specially formulated index-matching liquid that does not generate fluorescent. The liquid fills a gap of less than 5 μm .

The switch's transmission spectrum preserves that of the fiber itself, without introducing additional distortion, making it ideal for spectroscopic applications. This design ensures high fidelity in signal transmission, maintaining the integrity of the original fiber characteristics for precise analytical measurements.

Switches with PM fibers transmit both polarizations the same way as the fiber.

Specifications

Parameter	Min	Typical	Max	Unit
Operating Wavelength	300		2600	nm
Insertion Loss ^[1]	1x1	0.5	1.0	dB
	1x2	0.8	1.2	
	1x3	1	1.8	
Polarization Depended Loss			0.1	dB
Wavelength Dependent Loss		0.05	0.1	dB
Cross Talk On/Off Ratio ^[1]	35	45	50	dB
Return Loss ^[1]	35			dB
Rise/Fall Time		3	5	ms
Repetition Rate			1	Hz
Repeatability			± 0.05	dB
Durability	10^8			Cycles
Optical Power Handling	1	2	3	W
Switching Type	Latching / Non-Latching			
Operating Temperature	-5		+60	°C
Storage Temperature	-40		+60	°C
Fiber Type	100, 200, 300, 400, 500, 600 Core, or equivalent			μm

Notes:

[1]. Excluding Connectors. Measure @ Light source CPR<14 dB.

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Fiber-Fiber™ Large Core No-Gap Compact Fiber Optical Switch


(up to 0.5 mm diameter, ultra-broadband UV-IR, 1x1, 1x2, 1x3, bidirectional)

(Protected by U.S. patent 6823102 and pending patents)



DATASHEET

Mechanical Dimensions (mm)

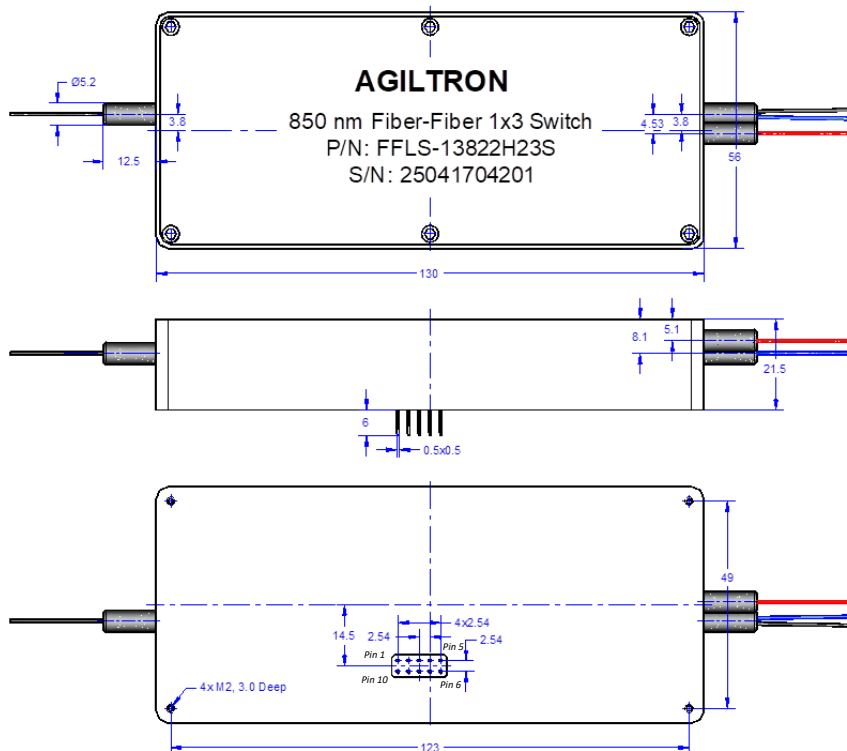

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Latching Type

Optical Path	Relay 1				Relay 2			
	Electrical Drive			Status Sensor	Status Sensor	Electrical Drive		
	Pin 1	Pin 2	Pin 3	Pin 4-5	Pin 6-7	Pin 8	Pin 9	Pin 10
Common → Port 1	5V	0V	0V	Open	Open	0V	0V	5V
Common → Port 2	5V	0V	0V	Open	Close	0V	5V	0V
Common → Port 3	0V	5V	0V	Close		0V	0V	0V

Non-Latching Type

Optical Path	Relay 1				Relay 2			
	Electrical Drive			Status Sensor	Status Sensor	Electrical Drive		
	Pin 1	Pin 2	Pin 3	Pin 4	Pin 6	Pin 8	Pin 9	Pin 10
Common → Port 1	0V	NC	0V	Open	Open	0V	NC	0V
Common → Port 2	0V		0V	Open	Close	0V		5V
Common → Port 3	5V		0V	Close	Open	0V		0V

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Fiber-Fiber™ Large Core No-Gap Compact Fiber Optical Switch

(up to 0.5 mm diameter, ultra-broadband UV-IR, 1x1, 1x2, 1x3, bidirectional)

(Protected by U.S. patent 6823102 and pending patents)



DATASHEET

Electrical Connector Configurations

The load is a resistive coil which is activated by applying 5V (draw ~ 40mA). Agiltron offers a computer control kit with TTL and USB interfaces and Windows™ GUI. We also offer RS232 interface as an option

Latching Type – Single Coil

Application Note: Applying a constant driving voltage increases stability. The switches can also be driven by a pulse mode using Agiltron recommended circuit for energy saving.

Status	OpticalPath			Electric Drive			Status Sensor	
	1x1	Dual 1x1	1x2	Pin 1	Pin 2	Pin 3	Pin 4 - 5	Pin 6 - 7
Status I	Port 1 → 1'	Port 1 → 1' Port 2 → 2'	Port 1 → 1'	0	5V Pulse	NC	Open	Open
Status II	Dark	Dark	Port 1 → 2'	0	NC	5V Pulse	Close	Close

[1]. Typical Pulse width is 50 ms.

[2]. We can provide 3V or other Driving voltage switches, please call sales.

[3]. NC: No electric Connection.


Non-Latching Type

Status	OpticalPath					Electric Drive			Status Sensor	
	1x1 Transparent	1x1 Dark	Dual 1x1 Transparent	Dual 1x1 Dark	1x2	Pin 1	Pin 2	Pin 3	Pin 4 - 5	Pin 6 - 7
Status I	Port 1 → 1'	Dark	Port 1 → 1' Port 2 → 2'	Dark	Port 1 → 1'	0	NC	NC	Open	Open
Status II	Dark	Port 1 → 1'	Dark	Port 1 → 1' Port 2 → 2'	Port 1 → 2'	0	5V	NC	Close	Close

[1]. We can provide 3V or other Driving voltage switches, please call sales.

[2]. NC: No electric Connection.

Functional Diagram

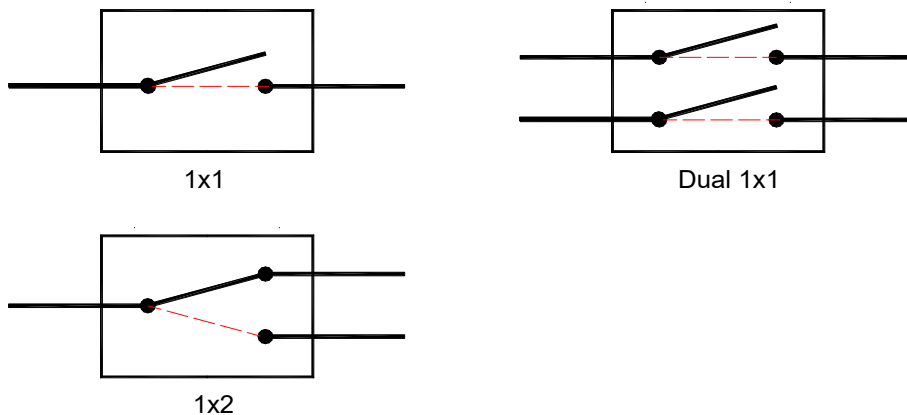

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Fiber-Fiber™ Large Core No-Gap Compact Fiber Optical Switch

(up to 0.5 mm diameter, ultra-broadband UV-IR, 1x1, 1x2, 1x3, bidirectional)

(Protected by U.S. patent 6823102 and pending patents)



DATASHEET


Ordering Information (Part Number)

Prefix	Configuration	Test Wavelength [1]	Type	Package	Fiber Core Size	Fiber Cover	Fiber Length	Connector [1][4]	Driver	Benchtop [3]
LCFF-	1x1 = 1 1x2 = 2 1x3 = 3	488 = 4 630 = 6 780 = 7 850 = 8 980 = 9 1060 = 1 1310 = 3 1550 = 5 2000 = 2 Special = 0	Latching = 1 Non-latching = 2 Special = 0	Standard = 1 Special = 0	200 μm (NA0.22) = F 300 μm (NA0.22) = G 400 μm (NA0.22) = H 500 μm (NA0.22) = I 600 μm (NA0.22) = J UV180nm = U Special = 0	Bare fiber = 1 2 mm Jacket = 2 3mm jacket = 3 Special = 0	0.25m = 1 0.5m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 SMA = 3 Special = 0	Non = 1 USB = 2 RS232 = 3 TTL = 4	Non = 1 Yes = 2

- [1]. The device is intrinsically ultra-broadband limited by the fiber's transmission. We only test at one selected wavelength to save cost. If a customer needs to test at several wavelengths, the selection is special = 0 with added cost.
- [2]. Regular fiber connector has PER ~22dB. Connector with PER >27 dB is available using special process
- [3]. The benchtop integrates the modulator, driver, and power supply. Front Panel: SMA 0-5V electrical control input port for precise modulation. Fiber input and output ports with standard FC/APC connectors. Back Panel: 100-240 VAC power input for global compatibility and a Power switch for easy on/off control. This all-in-one design simplifies setup and operation
- [4]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

Red – Special Order

Benchtop Box Mechanical Dimension

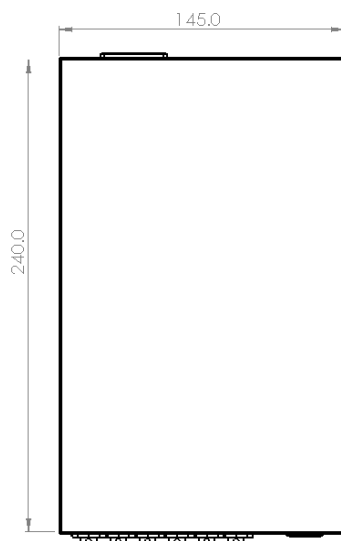

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.



Fiber-Fiber™
Large Core No-Gap Compact Fiber Optical Switch
(up to 0.5 mm diameter, ultra-broadband UV-IR, 1x1, 1x2, 1x3, bidirectional)

(Protected by U.S. patent 6823102 and pending patents)



DATASHEET

Typical Response

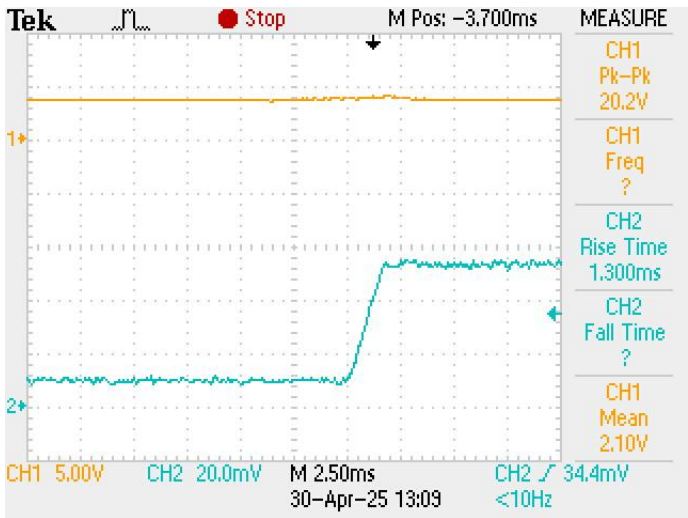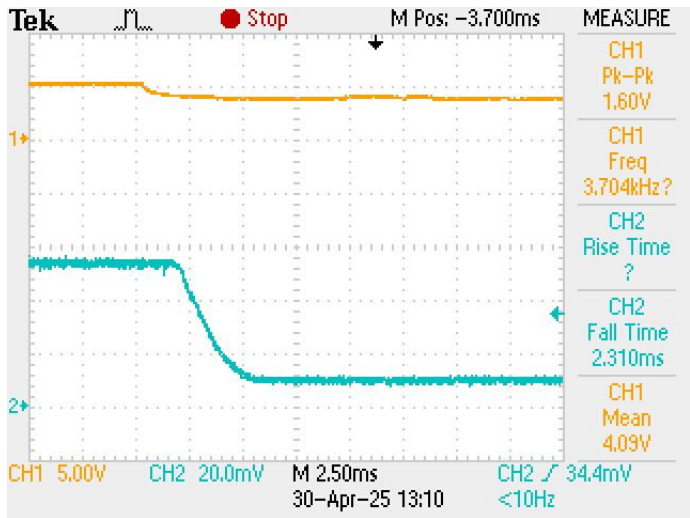

Command List

```
Command/Echo  /Comments

BaudRate Setting:  9600-N-8-1


CMD:   0x01 0x12 0x00 x(HEX)  /Switch to CH, x: 1, 2, 3
Echo:  0x01 0x12 0x00 x(HEX)  /Succeeded

      CH      Status
      1      I1-O1
      2      I1-O2
      3      I1-O3

CMD:   0x01 0x02 0x00 0x00      /Check Version
Echo:  0x01 0x02 0x41 0x30
```

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Typical Fiber Transmissions

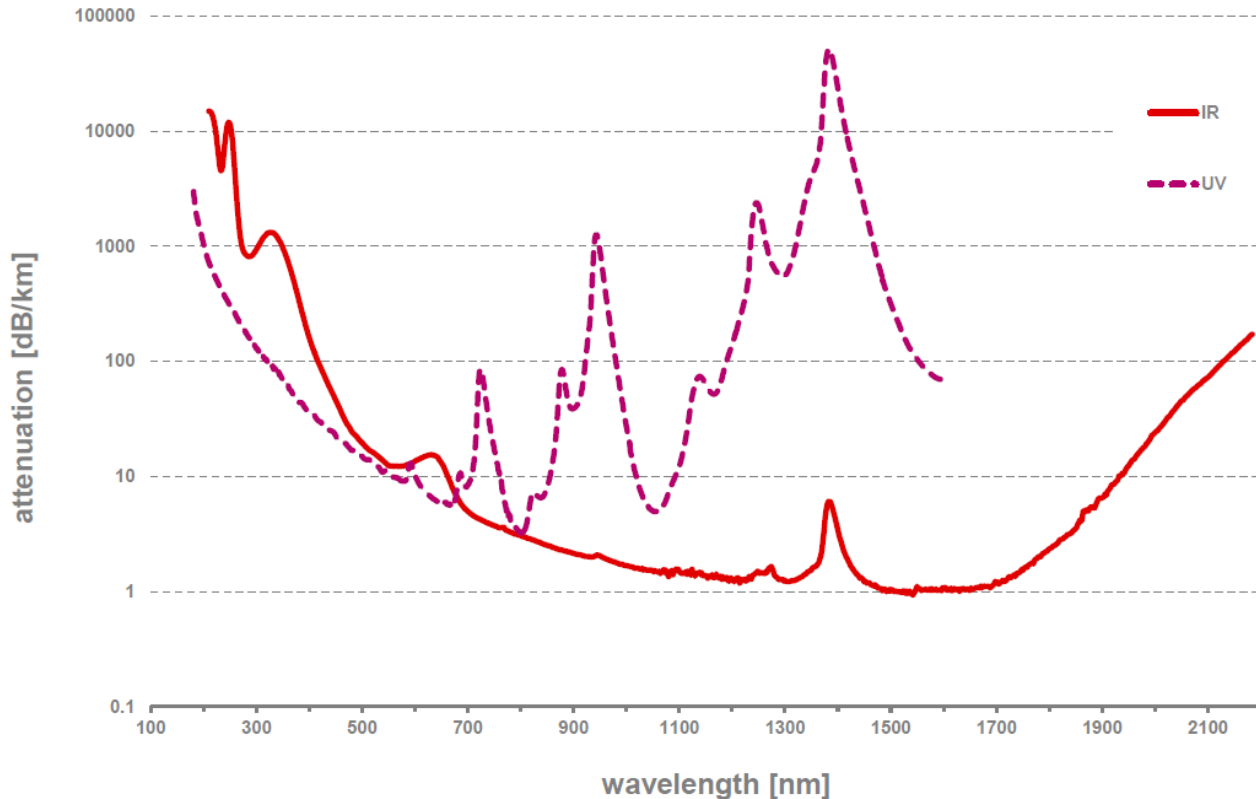

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.