

1x3, 1x4 PM Fiber Fused Coupler - Box

430 - 2100nm, PM



DATASHEET

[Return to the Webpage](#)



Features

- Low Excess Loss
- High Power Handling
- Available for Slow Only or Fast Axis App
- Telcordia GR-1221 Compliant

Applications

- Power Monitoring
- Coherent Communication
- Fiber Gyroscope
- Fiberoptic Instrumentation

The FC Series PM fiber optic coupler is based on Agiltron's fused biconical taper technology and compact packaging structure. It features good uniformity, low excess loss, and very low polarization sensitivity. The device is ideal for splitting or combining light with exceptional performance over a wide wavelength range.

Couplers are highly efficient in splitting light with little loss, about 0.2dB per joint, but incur significant losses when combining lights; for example, a 50/50 coupler produces a 50% loss to each beam when combined. For beam-combining applications, search Combiner.

Specifications

Parameter	Min	Typical	Max	Unit
Port		1x3		
Operating Wavelength	430	633	2100	nm
Operating Bandwidth		± 5		nm
Splitting Ratio		22.3 / 33.3 / 44.4		%
Axis Alignment (B type)		Both Axis Working		
Axis Alignment (F type)		Fast Axis Blocked		
Insertion Loss (B type)		≤ 7.4/5.5/4.3		dB
Insertion Loss (F type)		≤ 8.6/6.7/5.5		dB
Splitting Ratio Tolerance		± 3		%
Excess Loss (B type)		≤ 1.2		dB
Excess Loss (F type)		≤ 2.4		dB
Polarization Extinction Ratio (for B type)		≥ 18		dB
Polarization Extinction Ratio (for F type)		≥ 23		dB
Fiber Type		PM630-HP		
Pigtail Type		250μm Bare Fiber; 900μm Loose Tube; 2mm/3mm Loose Cable		
Dimensions		120 x 80 x 18 (AL)		mm
Power Handling		≤ 1		W
Operating Temperature	-40		85	°C
Storage Temperature	-40		85	°C

Notes:

* Above data test without connector, for device with connector, IL+0.6dB, PER-2dB, RL-5dB.

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 07/17/25

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


1x3, 1x4 PM Fiber Fused Coupler - Box

430 - 2100nm, PM



DATASHEET

Package Dimensions (mm)

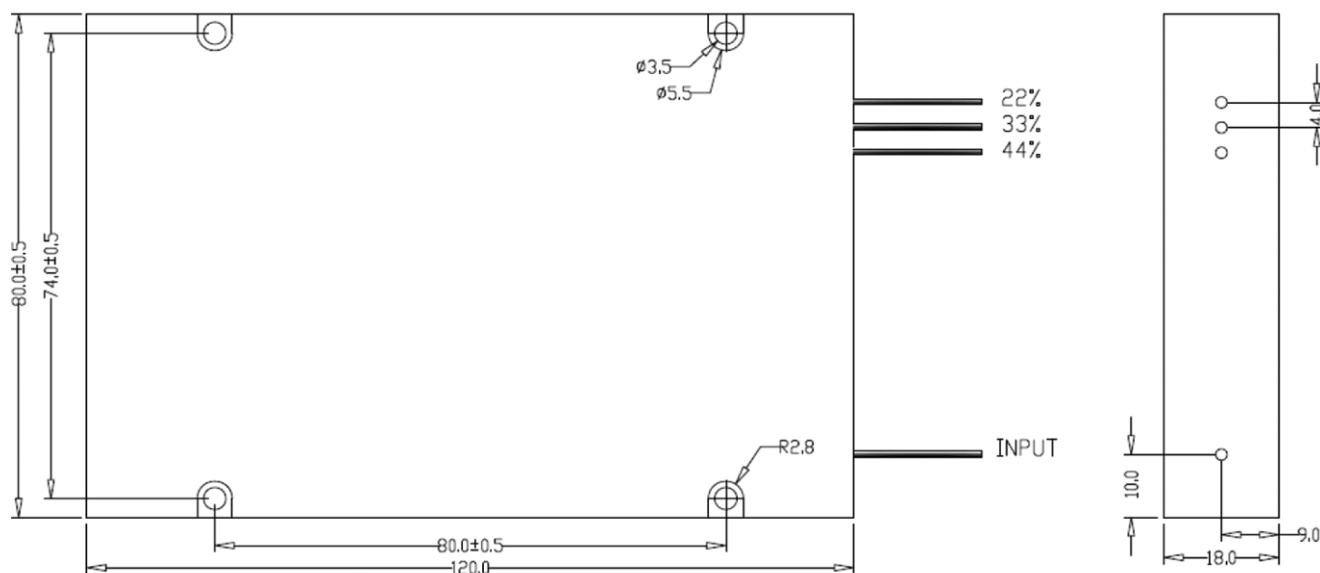

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

1x3, 1x4 PM Fiber Fused Coupler - Box

430 - 2100nm, PM



DATASHEET

Ordering Information (Part Number)

Prefix	Wavelength	Grade	Package	Coupling Ratio	Port	Fiber Type	Fiber Cover	Connector Type ^[2]
FCPM-	433nm = 04 589nm = 05 633nm = 06 780nm = 07 830nm = 08 980nm = 09 1064nm = 10 1310nm = 13 1480nm = 14 1550nm = 15 1950nm = 19 2000nm = 20 2050nm = 25 2100nm = 21 Special = 00	P = 1 A = 2 Aerospace ^[1] = A	box = 1 Special = 0	05:90:05 = 1 10:80:10 = 2 15:70:15 = 3 20:60:20 = 4 25:50:25 = 5 30:40:30 = 6 33:33:33 = 7 35:30:35 = 8 40:20:40 = 9 22:33:44 = B 25:25:25:25 = A Special = 0	 1x3 = 3 1x4 = 4	Panda = 1 Special = 0	250μm = 1 2mm = 2 3mm = 3 900μm = 4 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = A LC/UPC = U Special = 0

[1]. Aerospace-grade package featuring an aluminum metal casing filled with a specially formulated RTV compound that is both vibration-resistant and thermally conductive, specifically designed to endure repeated thermal shock cycles from -45°C to 90°C.

Note: 1m fiber length is default. Other fiber length is available, please add the extension -xxm, such as – 2.0m after 9-digital, for which the lead time may be longer accordingly.

[2]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.