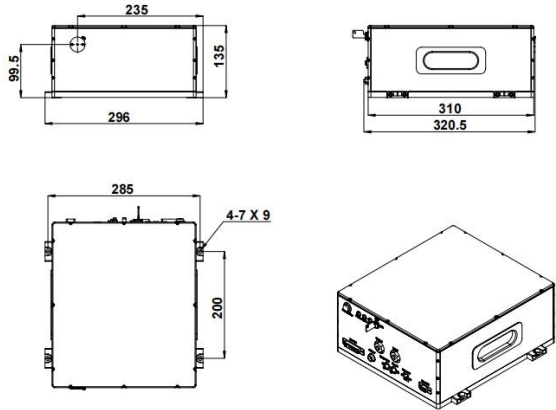
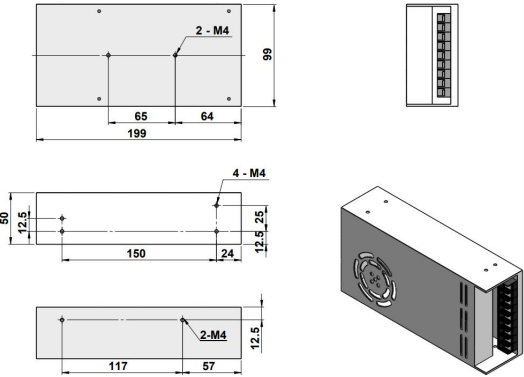


LASER HEAD (DRIVER Integrated) ⁵	POWER SUPPLY (100-240VAC) optional	WATER CHILLER
 320.5 (L) × 296 (W) × 135 (H) mm³, 16.8kg	 199(L) × 99 (W) × 50 (H) mm³, 0.83kg	 345 (L) × 248 (W) × 215 (H) mm³, 11.0kg

1 Average power (mW)= Single pulse energy (μJ)* Rep. rate(kHz)

2 Any energy level can be selected within this range.

3 Pulse width not tunable, the value varies with different frequency and energy.

4 Frequency is adjustable within this range.

5 Output energy adjustable 10-100%; RS232 control optional.