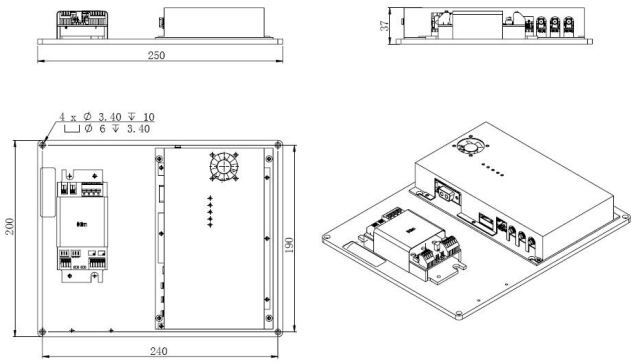
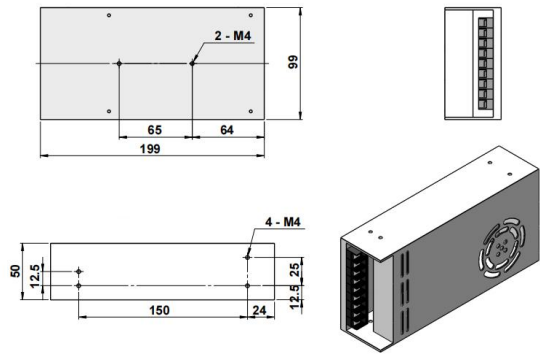
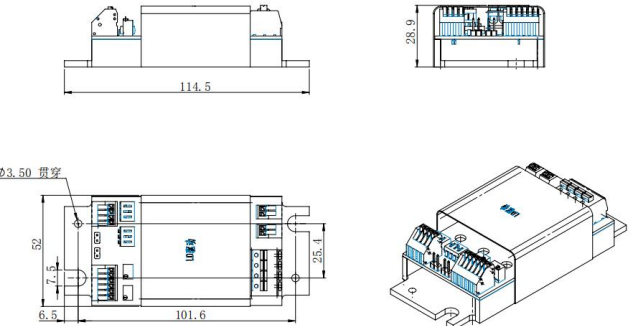
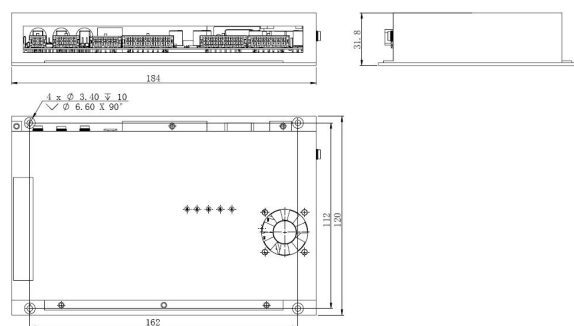


DRIVER (PSU-EO-H)	POWER SUPPLY (100-240VAC) optional
 250(L)×200(W)×37(H)mm³, 1.4kg	 580(L) × 290(W) × 470(H) mm³, 0.95 kg
DRIVER include:	
LD Driver	Control Board
 114.5(L)×52(W)×28.9(H)mm³, 0.2kg	 184(L)×120(W)×31.8(H)mm³, 0.7kg

- 1 The output power and energy varies with different frequency; Higher energy can be customized.
- 2 Frequency is adjustable, adjust the step size to 1kHz. One fixed value between 1k-10kHz or 1k-3kHz.
- 3 Beam height from base plate is 80mm at conduction cooled, 56mm at air cooled.
- 4 Heat dissipation is offered by customer (>70W).
- 5 Heat dissipation is offered by customer (>70W).