


FC-639/650/660-CH



FC-639/650/660-CH Laser System

It can combine 3 wavelengths into a system and three fibers output. It can control the laser output either separately, or open multiple lasers at the same time.




SPECIFICATIONS

Wavelength combination (nm)	CH1: 639, CH2: 650, CH3: 660
Wavelength (nm)	±1@639nm, ±10@650nm, ±5@660nm
Operating mode	CW
Output power after fiber	0.9W@639nm, 0.1W@650nm, 1.3W@660nm
Power stability (rms, over 4 hours)	<3%, <2%, <1%
Output type	Three channels output
Fiber type	MM fiber
Fiber Core Diameter(μm)	400/ 200
Fiber Connector	SMA905/ FC
Fiber Length (m)	1 (Other lengths are available on request)
Fiber jacket	PVC or metal jacket
Warm-up time (minutes)	<5
Operating temperature (°C)	10~35
Input voltage	100-240VAC
Modulation optional	TTL on/off, 1Hz-1kHz, 1kHz-10kHz, 10kHz-30kHz; and Analog modulation optional
Expected lifetime (hours)	10000
Warranty	1 year

Remark: Please consult CNI for customized configurations and modifications available.

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068

FC-639/650/660-CH

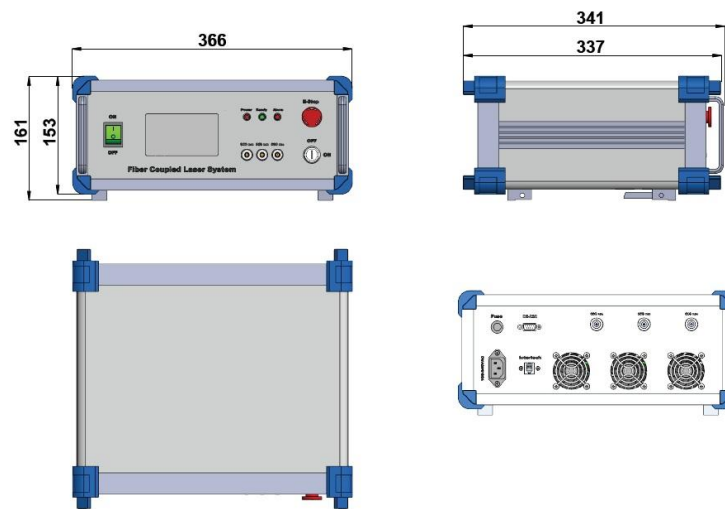

341 (L)×366 (W) ×161 (H) mm³