


FC-OEM-505/1-30mW




VIOLET DIODE LASER
AT 505nm

It features ultra compact design, long lifetime, cost-effectiveness and easy operation. They are used in medical imaging, flow cytometry, DNA sequencing, etc.




SPECIFICATIONS

Central wavelength (nm)	505±10
Operating mode	CW
Output power after fiber (mW) ¹	1-30
Power stability (rms, 4 hours ± 3°C)	<2%, <1%, <0.5%
Fiber type	SM fiber, PM fiber optional
Fiber Core diameter	4-9μm, 0.12NA
Fiber connector	FC/PC, FC/APC optional
Fiber length	0.8m
Fiber jacket	0.9mm PVC
Transverse mode	TEM ₀₀
Ellipticity	>0.95
M ² after fiber	~1.1
Warm-up time (minutes)	<5
Cooled method	Conduction
Operating temperature (°C)	10-35
Operating voltage (VDC)	5V
Expected lifetime (hours)	>10000




LASER HEAD (DRIVER Integrated)²

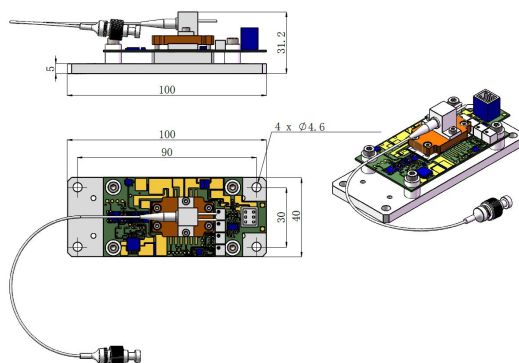

100 (L) × 40 (W) × 31.2 (H) mm³, 0.2kg

POWER SUPPLY (100-240VAC) optional

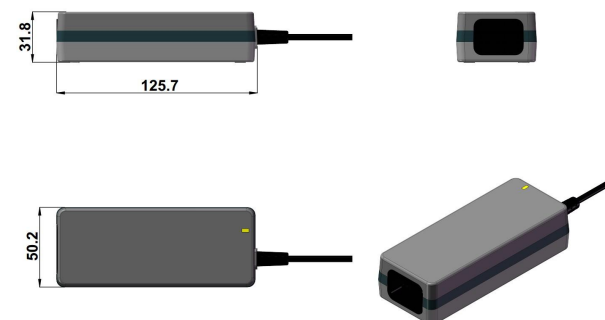

125.7 (L) × 50.2 (W) × 31.8 (H) mm³, 0.3kg

1 Any power level can be selected in this range.

2 Fixed output power; RS232 control optional;

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068