


FC-xx



FC-xx Laser System

FC-xx series laser system can combine 2 wavelengths into a system and one fiber outputs. It can control the laser output either separately, or open multiple lasers at the same time.




SPECIFICATIONS

Wavelength combination (nm)	375/520	405/488	450/660
Wavelength (nm)	±5/±10	±5/±5	±5/±5
Operating mode	CW		
Output power after fiber (W)	0.3/1.3	2/2	3/1.5
Power stability (rms, over 4 hours)	<3%, <2%, <1%		
Output type	One channel output		
Fiber type	MM fiber		
Fiber Core Diameter(μm)	400/ 200		
Fiber Connector	SMA905/ FC		
Fiber Length (m)	1 (Other lengths are available on request)		
Fiber jacket	PVC or metal jacket		
Warm-up time (minutes)	<5		
Operating temperature (°C)	10~35		
Input voltage	100-240VAC		
Modulation optional	TTL on/off, 1Hz-1kHz, 1kHz-10kHz, 10kHz-30kHz; and Analog modulation optional		
Expected lifetime (hours)	10000		
Warranty	1 year		

Remark: Please consult CNI for customized configurations and modifications available.

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068

FC-xx

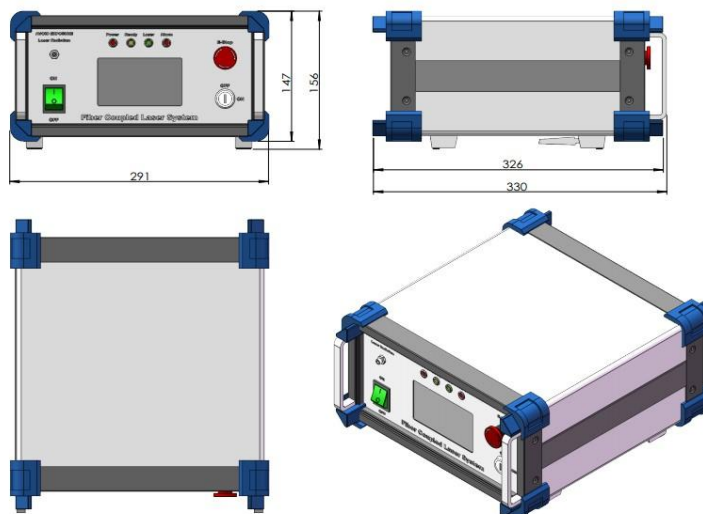

330 (L)×291 (W) ×156 (H) mm³