


FC-xxxxx



FC-xxxxx Laser System

FC-xxxxx series laser system can combine 5 wavelengths into a system and one fiber outputs. It can control the laser output either separately, or open multiple lasers at the same time.



SPECIFICATIONS

Wavelength combination (nm)	405/488/520/640/1064	405/520/660/808/1550	450/520/640/915/1320
Wavelength (nm)	$\pm 5/\pm 5/\pm 10/\pm 5/\pm 10$	$\pm 5/\pm 10/\pm 5/\pm 10/\pm 20$	$\pm 5/\pm 10/\pm 5/\pm 10/\pm 10$
Operating mode	CW		
Output power after fiber (W)	2/2/1.3/1/10	2/1.3/1.5/5/2.5	3/1.3/1/5/4
Power stability (rms, over 4 hours)	<3%, <2%, <1%		
Output type	One channel output		
Fiber type	MM fiber		
Fiber Core Diameter(μm)	400/ 200		
Fiber Connector	SMA905/ FC		
Fiber Length (m)	1 (Other lengths are available on request)		
Fiber jacket	PVC or metal jacket		
Warm-up time (minutes)	<5		
Operating temperature ($^{\circ}\text{C}$)	10~35		
Input voltage	100-240VAC		
Modulation optional	TTL on/off, 1Hz-1kHz, 1kHz-10kHz, 10kHz-30kHz; and Analog modulation optional		
Expected lifetime (hours)	10000		
Warranty	1 year		

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068




SPECIFICATIONS

Wavelength combination (nm)	488/520/690/785/940	1030/1064/1270/1310/1532
Wavelength (nm)	$\pm 5/\pm 10/\pm 5/\pm 10/\pm 5$	$\pm 10/\pm 10/\pm 10/\pm 20/\pm 10$
Operating mode	CW	
Output power after fiber (W)	2/1.3/1/4/5	5/10/4/4/1
Power stability (rms, over 4 hours)	<3%, <2%, <1%	
Output type	One channel output	
Fiber type	MM fiber	
Fiber Core Diameter(μm)	400/ 200	
Fiber Connector	SMA905/ FC	
Fiber Length (m)	1 (Other lengths are available on request)	
Fiber jacket	PVC or metal jacket	
Warm-up time (minutes)	<5	
Operating temperature ($^{\circ}\text{C}$)	10~35	
Input voltage	100-240VAC	
Modulation optional	TTL on/off, 1Hz-1kHz, 1kHz-10kHz, 10kHz-30kHz; and Analog modulation optional	
Expected lifetime (hours)	10000	
Warranty	1 year	

Remark: Please consult CNI for customized configurations and modifications available.

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068

FC-xxxxx

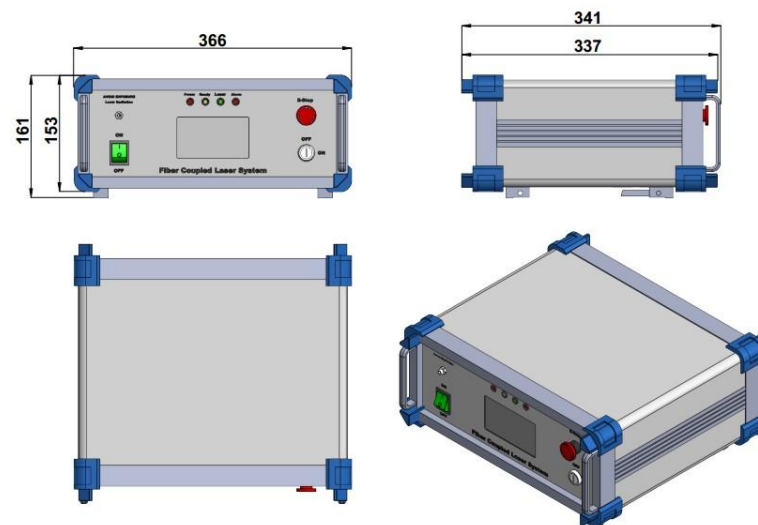

341 (L)×366 (W) ×161 (H) mm³