

FS-F-515A/1-2W


FEMTOSECOND PULSED LASER AT 515nm

All Fiber Femtosecond pulsed laser at 515nm is made features of short pulse duration, high repetition rate, high stability and good beam quality, which is used in optical microscope, photon imaging, physics experiment, etc.




SPECIFICATIONS

Wavelength (nm)	515±5
Operating mode	Pulsed
Average power (W) ¹	1-2
Single pulse energy (uJ)	1-2
Rep. rate (MHz)	1
Pulse duration (fs)	<300
Peak power (MW)	1-6.7
Ave power stability (rms, 4 hours±3°C)	<2%, <1%
Warm-up time (minutes)	<10
Transverse mode	TEM ₀₀
Beam divergence, full angle (mrad)	<1.0
Beam diameter at the aperture (1/e ² ,mm)	<2
M ² factor	<1.3
Beam height from base plate (mm)	118
Cooled method	Water cooled
Operating temperature (°C)	10-35
Power supply (100-240VAC)	RADIPS
Expected lifetime (hours)	>10000




LASER HEAD (DRIVER Integrated)

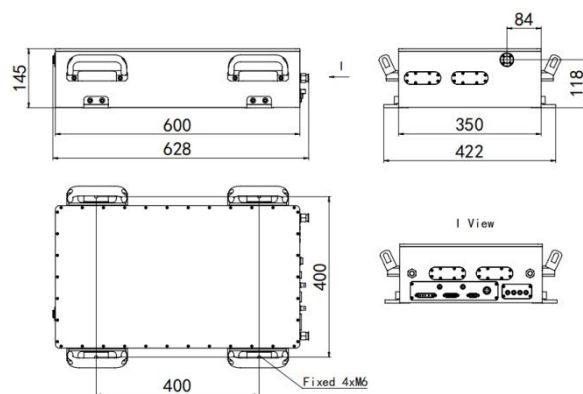


628 (L)×422 (W) ×145(H) mm³,40kg

POWER SUPPLY

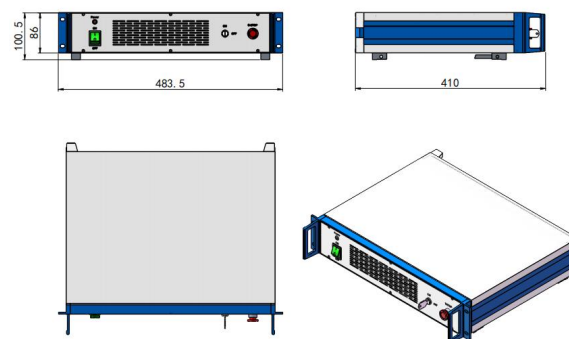

410 (L) ×483.5 (W) ×110.5 (H) mm³,4.5 kg

WATER CHILLER

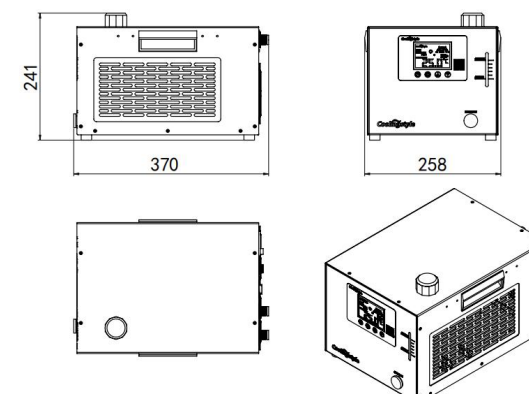

370 (L) ×258 (W) ×241 (H) mm³,12kg

¹ One fixed value between 1-2W.