

HPL-440-Q/1-3000mW

WATER COOLING LD PUMPED ALL-SOLID-STATE Q-SWITCHED BLUE LASER at 440nm





All solid state Q-switched blue laser at 440nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in marking, carving, measure, scientific research, and so on.



SPECIFICATIONS

Wavelength (nm)	440±1
Operating mode	Actively
Average power (mW) ¹	1-3000
Pulse duration (ns)	~200 @5kHz&3W
Rep. rate ²	5kHz
Ave power stability (rms, 4 hours±3°C)	<5%, <3%
Beam divergence, full angle (mrad)	<3.5
Beam diameter at the aperture (1/e2,mm)	<6
Beam height from base plate (mm)	60
Warm-up time (minutes)	<10
Cooled method	Water Cooled
Operating temperature (°C)	15-35
Power supply (220-240AC)	PSU-HPL-Q & PSU-HPL-CW
Expected lifetime (hours)	>10000

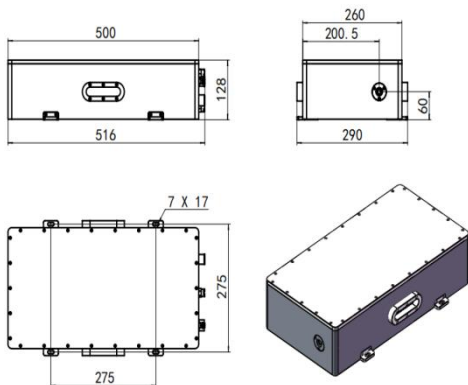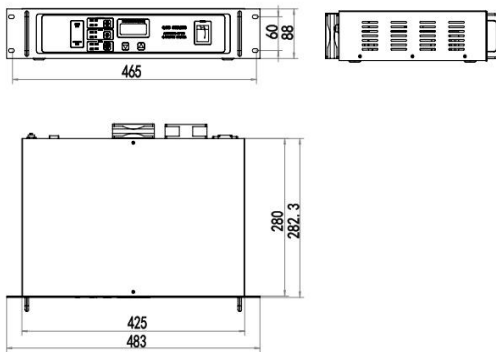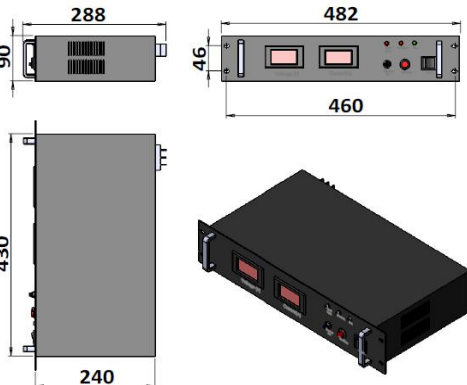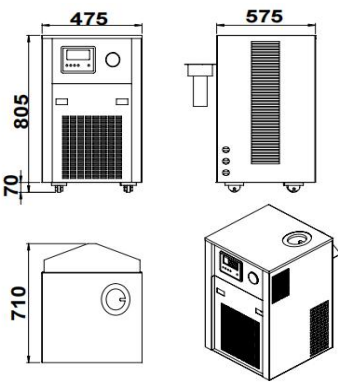

LASER HEAD	POWER SUPPLY	POWER SUPPLY	WATER CHILL
 516 (L) ×290 (W) ×128(H) mm³, 12.5kg	 282(L) ×483(W) ×88(H) mm³, 7.5kg	 288(L) ×482(W) ×90(H) mm³, 5.5kg	 475 (L) ×575(W) ×805(H) mm³, 60kg

1 Any power level can be selected in this range.

2 Other rep.rate range available on request.