


980nm Laser Diode

■ Features



- ◆ High output power of 200W
- ◆ 400μm/0.22NA multimode optical fiber
- ◆ Center wavelength 980±10nm

■ Applications

- ◆ Medical Application
- ◆ Industrial Processing

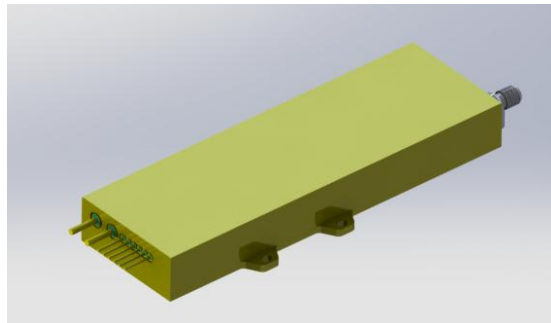

Outline Dimension (mm)

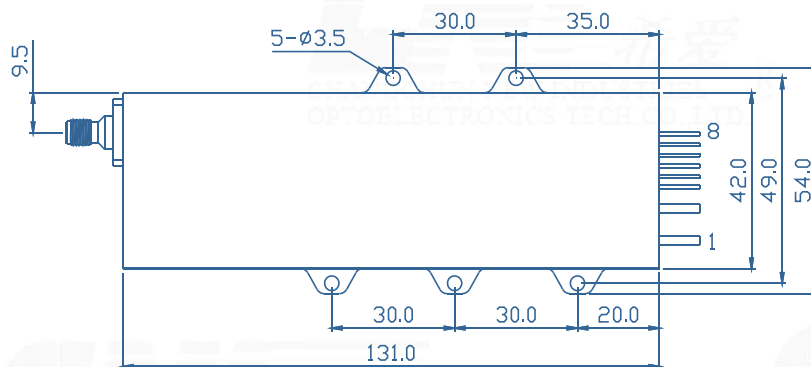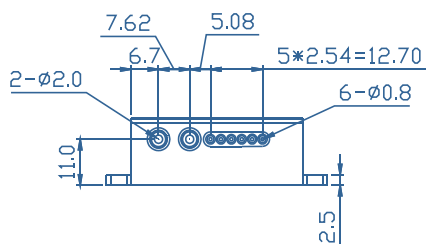

Pin-out Assignment	
Pin	Function
1	LD (-)
2	LD (+)
3	Aiming Beam(+5V)*
4	Aiming Beam(0V)
5	PD (N)
6	PD (P)
7	Thermistor
8	Thermistor

Typical Device Performance (25°C)

	Min	Typical	Max	Unit
Optical				
CW Output Power	-	200	-	W
Center Wavelength	-	980±10	-	nm
Spectral Width (FWHM)	-	<5.0	-	nm
Wavelength Shift with Temperature	-	0.35	-	nm / °C
Electrical				
Threshold Current	-	0.9	-	A
Operating Current	-	19		A
Operating Voltage	-	22.1		V
Slope Efficiency	-	11.1	-	W / A
Power Conversion Efficiency	50	47	-	%
Aming Beam				
Output Power	-	2	-	mW
Center Wavelength	-	650±10	-	nm
Operating Current	-	<30	-	mA
Operating Voltage	-	<2.5	-	V
Fiber*				
Fiber Core Diameter	-	400	-	μm
Fiber Cladding Diameter	-	440	-	μm
Fiber Buffer Diameter	-	700	-	μm
Numerical Aperture	-	0.22	-	-
Fiber Length	-	1-5	-	m
Fiber Connector	-	-	-	-

* Customized fiber and connector available.


Absolute Ratings

	Min	Max	Unit
Operating Temperature	15	35	°C
Operating Relative Humidity	-	75	%
Cooling Mode	-	Water cooling (25°C)	-
Storage Temperature	-20	80	°C
Storage Relative Humidity	-	90	%
Lead Soldering Temperature (10 s max)	-	250	°C

* Measuring specifications.

All figures in this specification are measured by CNI's method and may contain measurement deviations.

The above specifications are for reference purpose only and subjected to change without prior notice.

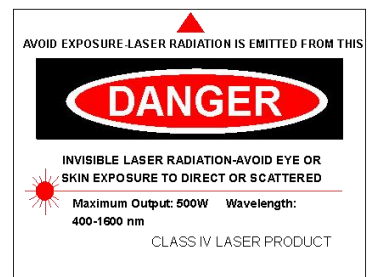

Changchun New Industries Optoelectronics Tech. Co., Ltd
<http://www.cnilaser.com>

◆ CONTACT

No.668, Chuangxin Road, High-tech zone,
 Changchun 130012, China

Phone: 0086-431-85603799

Fax: 0086-431-87020258