

MDL-XS-975/1-50mW




**DIODE XS SERIES LASER
AT 975nm**

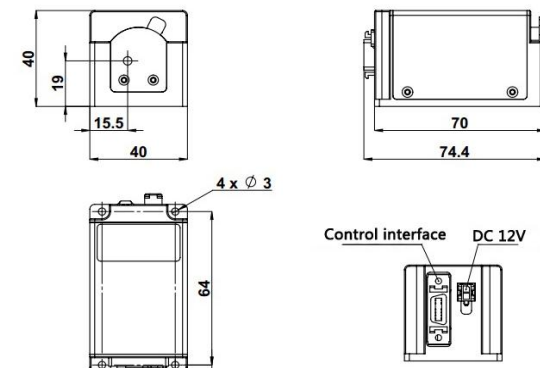
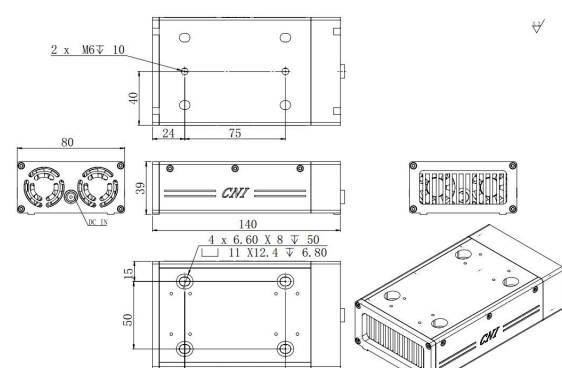
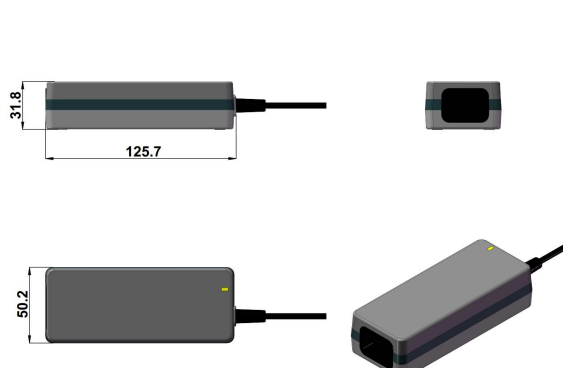
It features integrated electronics, plug and play, miniaturization, international standard interface. They are the ideal solution for a wide range of applications including life sciences, environmental monitoring, inspection and machine vision.



SPECIFICATIONS

Central wavelength (nm)	975±10
Operating mode	CW
Output power (mW) ¹	1-50
Power stability (rms, 4 hours ± 3°C)	<2%, <1%, <0.5%
Transverse mode	Near TEM ₀₀
Noise of amplitude (rms, 20Hz-20MHz)	<1%, <0.5%
M ²	~1.5
Beam diameter at the aperture (1/e ² ,mm)	~1.2
Beam divergence, full angle (mrad)	<1.0
Polarization ratio	>10:1, (>50:1 optional) Horizontal±5 degree (Vertical optional)
Warm-up time (minutes)	<5
Beam height from base plate (mm)	19
Operating temperature (°C)	10-35
Operating voltage (VDC)	12V/4A
Modulation option	DMOD (TTL) DC-1MHz AMOD (Analog) DC-100kHz DMOD+ AMOD (TTL + Analog)
Expected lifetime (hours)	>10000



LASER HEAD (DRIVER Integrated) ²	HEATSINK (TC-05) optional	POWER SUPPLY (100-240VAC) optional
 74.4 (L) × 40 (W) × 40 (H) mm³, 0.2kg	 140 (L) × 80 (W) × 39 (H) mm³, 0.7kg	 125.7 (L) × 50.2 (W) × 31.8 (H) mm³, 0.3kg

¹ Any power level can be selected in this range.

² The laser head needs to be used on a heat sink with good heat dissipation. Fixed output power; RS232 control optional.

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068