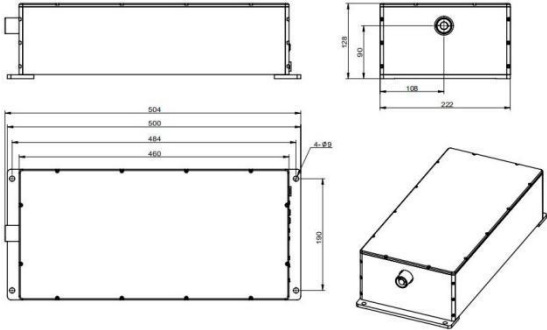
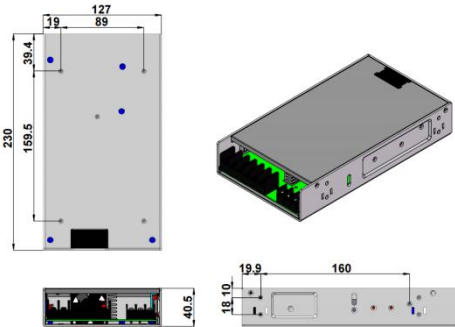
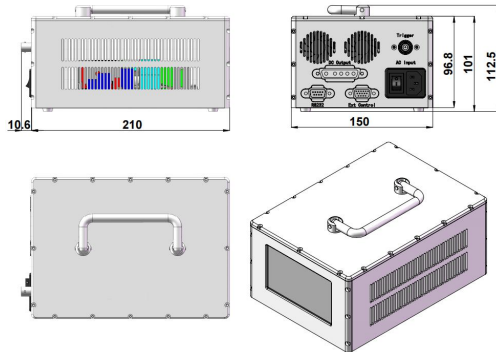
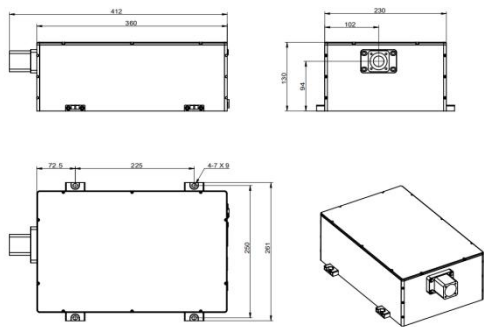
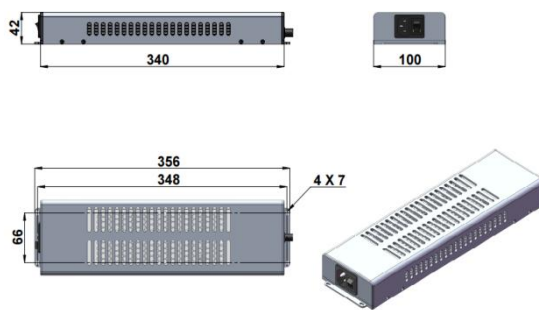
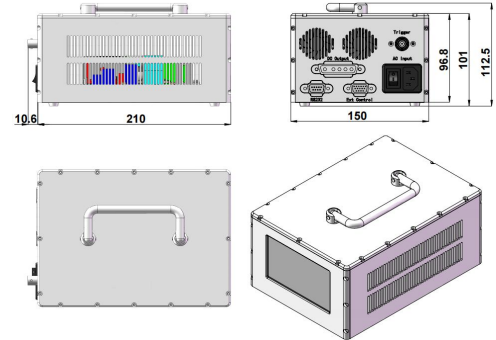


LASER HEAD (DRIVER Integrated) (MGL-D-532-Water 20W-25W)  504 (L) × 222 (W) × 128 (H) mm³, 17 kg	POWER SUPPLY (100-240VAC) optional  199 (L) × 99 (W) × 50 (H) mm³, 0.9 kg	POWER SUPPLY PSU-24-C³ (100-240VAC) optional  220.6 (L) × 150 (W) × 112.5 (H) mm³, 2.7 kg
LASER HEAD (Driver Integrated) (MGL-D-532-Water 25W-35W)  412 (L) × 261 (W) × 130 (H) mm³, 18 kg	POWER SUPPLY (100-240VAC) optional  356 (L) × 100 (W) × 42 (H) mm³, 2.2kg	POWER SUPPLY PSU-36-C³ (100-240VAC) optional  220.6 (L) × 150 (W) × 112.5 (H) mm³, 2.7 kg

- 1 Any power level can be selected in this range.
- 2 The laser head and power supply cannot be separated.
- 3 Parameters can be adjusted.(on/off, etc.)