



MGL-FN-xxx-SM Series

SM FIBER OUTPUT LASER

CNI has a long experience in the delivery of fiber coupled laser light sources providing high efficiency and long term stability. All laser types can be offered with appropriate fiber coupling systems. This type is specifically designed for single-mode fiber coupling with high power stability and long term stability.








SPECIFICATIONS

Wavelength (nm)	522±1
Operating mode	CW
Output power (mW) ¹	1-300
Power stability (rms, 4 hours±3°C)	<3%, <2%, <1%
Transverse mode	TEM ₀₀
M ²	<1.2
Polarizaiton (optional)	>50:1 after PM fiber
Fiber connector	FC/APC
Fiber jacket	PVC
Fiber length ²	1m
Warm-up time (minutes)	<10
Operating Temperature (°C)	10-35
Modulation option	DC-1kHz; TTL and Analog optional
Power supply (100-240VAC)	PSU-H-FDA/ PSU-H-LED/ PSU-SR
Expected lifetime (hours)	>10000

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068

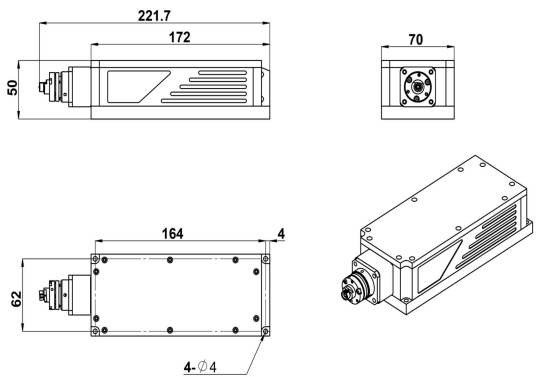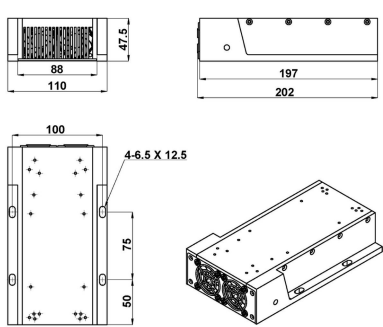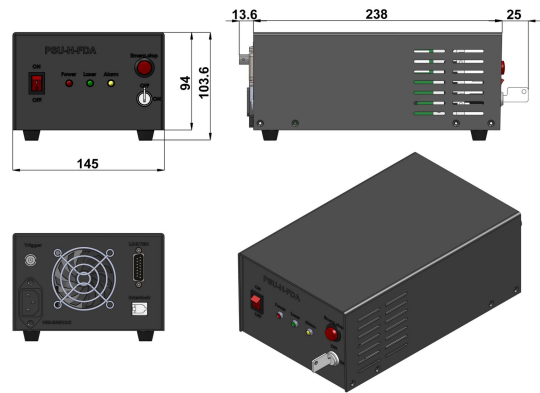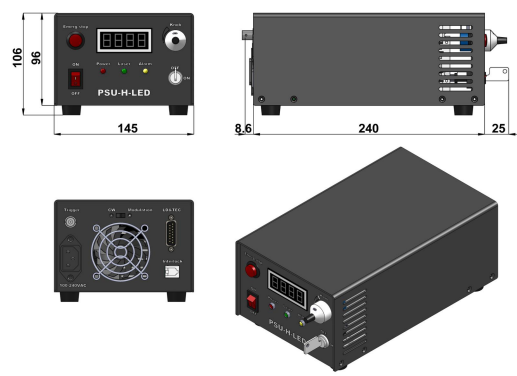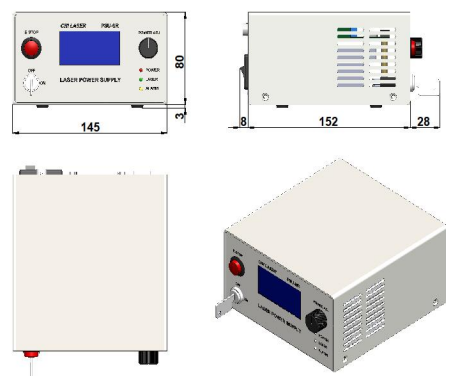

LASER HEAD ²	HEATSINK(OPTIONAL TC-02-FS)	POWER SUPPLY (PSU-H-FDA) ³
 221.7(L) × 70(W) × 50(H) mm³, 1.5 kg	 220(L) × 110(W) × 47.5(H) mm³, 1.25 kg	 276.6(L) × 145(W) × 103.6(H) mm³, 2.3 kg
POWER SUPPLY (PSU-H-LED) ⁴	POWER SUPPLY (PSU-SR) ⁴	
 273.6 (L) × 145(W) × 106 (H) mm³, 2.3 kg	 188(L) × 145(W) × 83(H) mm³, 1.2kg	

1 Any power level can be selected in this range.

2 The laser head needs to be used on a heat sink with good heat dissipation.

3 Fixed output power.

4 Output power adjustable 10-100%; RS232 control optional.