



MGL-W-515A/150-500mW




LD PUMPED ALL-SOLID-STATE
GREEN LASER

All solid state 515nm green laser is made features of ultra compact, long lifetime and easy operating, which is widely used in collimation, laser medical treatment, scientific experiment, optical instrument, laser display, etc.




SPECIFICATIONS

Wavelength (nm)	515±1
Operating mode	CW
Output power (mW) ¹	150-500
Power Stability (rms, 4 hours ± 3°C)	<3%, <2%, (<1% optional)
Transverse mode	Near TEM ₀₀
M ²	<3.0
Beam divergence, full angle (mrad)	<2.0
Beam diameter at the aperture (1/e ² , mm)	~3.0
Warm-up time (minutes)	<10
Pointing Stability(urad) (over 2 hours after warm-up and ±3°C)	<50
Pointing Stability Over Temperature (urad/°C)	<20
Polarization ratio	>50:1(100:1 optional) , Horizontal(Vertical optional)
Beam height from base plate (mm)	80
Operating temperature (°C)	10-35
Power supply (100-240VAC)	PSU-W-LED
Modulation option	DC-1kHz, 1kHz-10kHz, 10kHz-30kHz optional; TTL and Analog optional
Expected lifetime (hours)	>10000




LASER HEAD

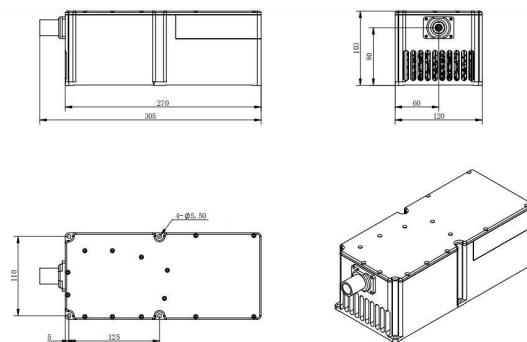

305 (L) ×120 (W) ×103 (H) mm³, 5.4 kg

POWER SUPPLY

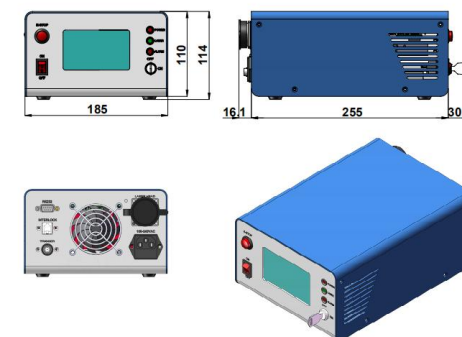

301.5 (L) ×185 (W) ×114 (H) mm³, 3.0 kg

¹ Any power level can be selected in this range.