

MIL-N-1990/1-2000mW

LD PUMPED ALL-SOLID-STATE INFRARED LASER AT 1990nm




All solid state infrared laser at 1990nm is made features of ultra compact, long lifetime and easy operating, which is used in Ho:YAG laser pumping, medical, scientific research, etc.



SPECIFICATIONS

Wavelength (nm)	1990±3
Operating mode	CW
Output power (mW) ¹	1-2000
Power stability (rms, 4 hours±3°C)	<2%, <1%
Transverse mode	Near TEM ₀₀
Polarizaion ratio	>50:1 Vertical
Beam divergence, full angle (mrad)	<2
Beam diameter at the aperture (1/e ² ,mm)	<2
Beam height from base plate (mm)	67.4
Warm-up time (minutes)	<10
Cooled method	Air Cooled
Operating temperature (°C)	15-30
Power supply (100-240VAC)	PSU-H-LED or PSU-H-FDA
Expected lifetime (hours)	>10000

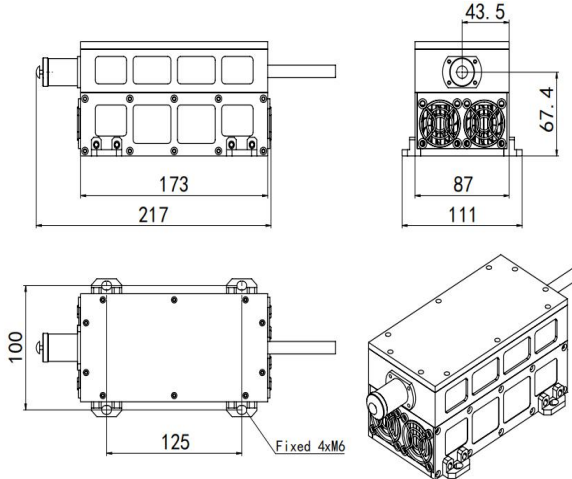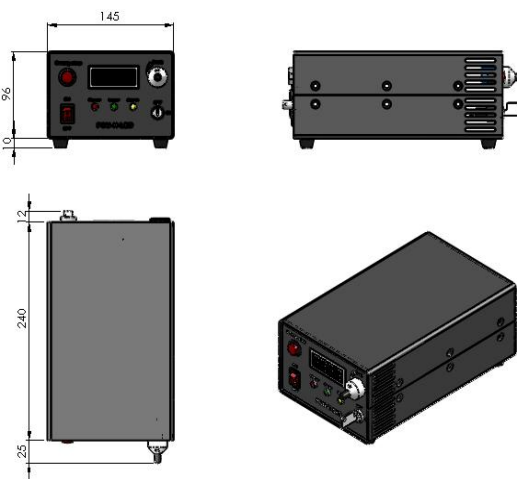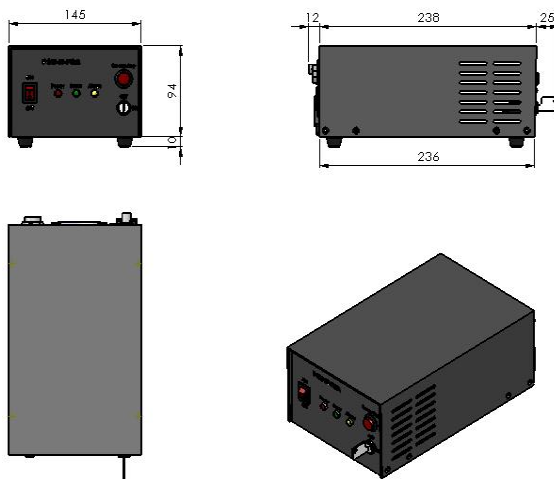

LASER HEAD	POWER SUPPLY (PSU-H-LED)	POWER SUPPLY (PSU-H-FDA)
 217(L)×111(W)×92(H) mm³, 4.5kg	 277 (L) ×145(W) ×106 (H) mm³, 2.6 kg	 275 (L) ×146(W) ×104 (H) mm³, 2.4 kg

¹ Any power level can be selected in this range.