

MIL-V-3600/1-400mW

**LD PUMPED ALL-SOLID-STATE
Infrared LASER AT 3600nm**

The series of laser provide a CW output power of about max 400mW. The customer can order any wavelength range in the list. It is widely used in remote sensing, communication, spectrum analysis, etc.




SPECIFICATIONS

Wavelength (nm)	3600±5
Operating mode	CW
Output power (mW) ¹	1-400
Power stability (rms, 4 hours±3°C)	<3%, <2%
Beam divergence, full angle (mrad)	<5
Beam diameter at the aperture (1/e ² ,mm)	<6
Beam height from base plate (mm)	82
Warm-up time (minutes)	<10
Cooled method	Air Cooled
Operating temperature (°C)	15-35
Power supply (100-240VAC)	RAD1PS
Expected lifetime (hours)	>10000




LASER HEAD

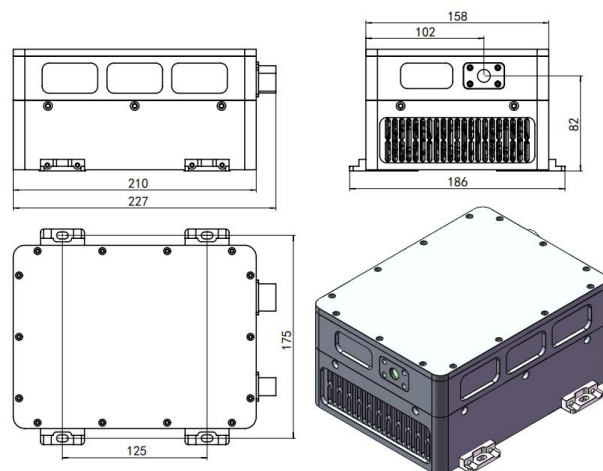

229(L)×186(W) ×105(H) mm³, 5.5kg

POWER SUPPLY

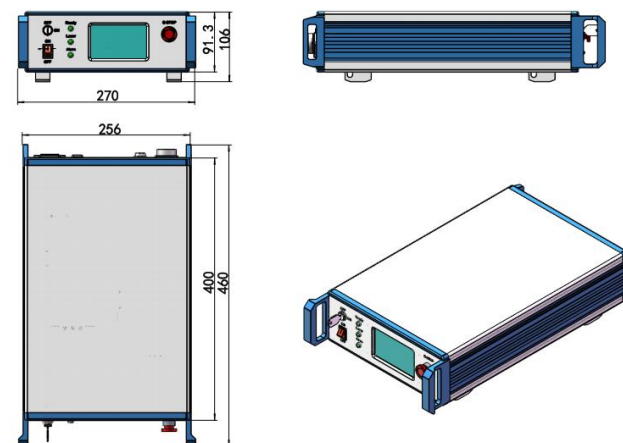

460 (L) ×270(W) ×106(H) mm³, 7 kg

¹ Any power level can be selected in this range.