

MIL-W-2128/1-1500mW

LD PUMPED ALL-SOLID-STATE INFRARED LASER AT 2128nm




All solid state 2128nm infrared laser is made features of high power ,good beam quality and easy operating, which is widely used in material processing especially for plastics, it use for pumping of laser sources for the mid infrared region, medical procedures such as precise tissue ablation, ophthalmic surgery or dentistry, suppresses the bleeding during operations, etc.



SPECIFICATIONS

Wavelength (nm)	2128 ± 5
Operating mode	CW
Output power (mW) ¹	1-2500
Power stability (rms, 4 hours±3°C)	<5%, <3%
Beam divergence, full angle (mrad)	<6
Beam diameter at the aperture (1/e ² ,mm)	<4
Beam height from base plate (mm)	98
Warm-up time (minutes)	<10
Cooled method	Air Cooled
Operating temperature (°C)	15-35
Power supply (100-240VAC)	PSU-W-LED or PUS-W-FDA
Expected lifetime (hours)	>10000

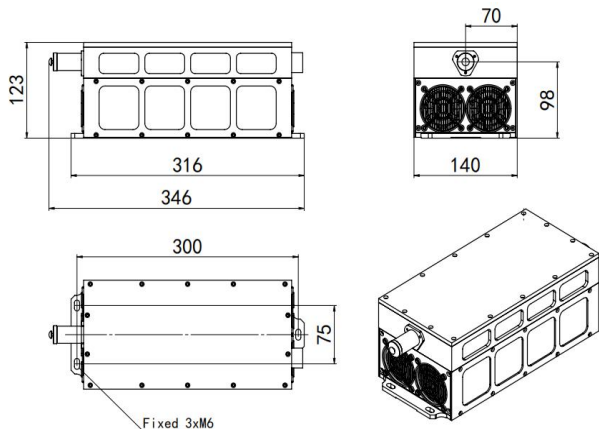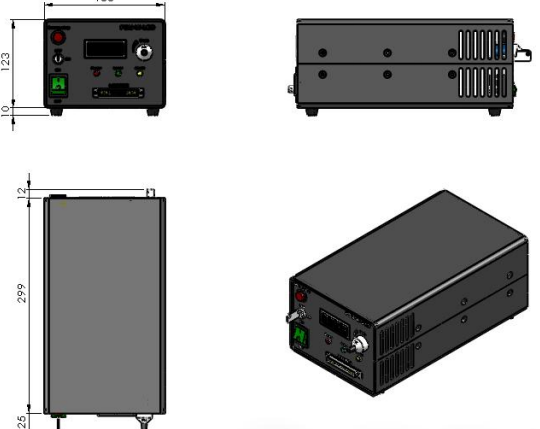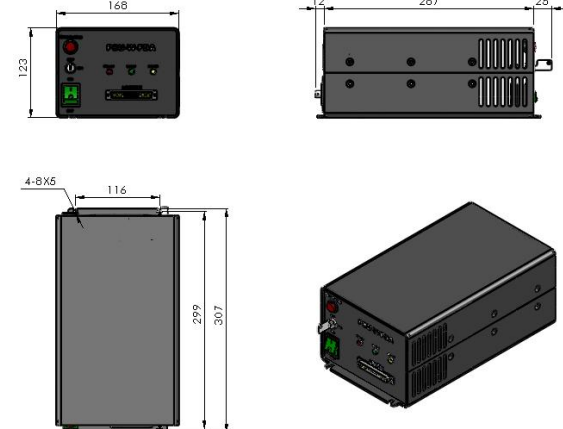

LASER HEAD	POWER SUPPLY (PSU-W-LED)	POWER SUPPLY (PSU-W-FDA)
 346 (L) × 140 (W) × 123 (H) mm³, 8.5kg	 336 (L) × 168 (W) × 133 (H) mm³, 4.6 kg	 307 (L) × 168 (W) × 123 (H) mm³, 4.5 kg

¹ Any power level can be selected in this range.