



PGL-D8-445/447/450



PGL-D8-445/447/450 laser module is made features of wide temperature range operating(without TEC), high reliability and low cost, which made it be used widely in orientation, alignment and measurement, etc.

SYSTEM SPECIFICATIONS*

Wavelength	nm	445	447	450
Wavelength tolerance	nm	±10	±10	±10
Output power	mW	1-30		
Operating mode		CW		
Transverse mode		Near TEM ₀₀		
Beam diameter at the aperture(1/e ²)	mm	~3.5		
Beam divergence, full angle	mrاد	<1		
Expected lifetime	hours	10000		
Warranty	years	1		

ELECTRICAL SPECIFICATIONS

Operating voltage(external PCB1)	6VDC
Operating voltage(external PCB2)	5VDC(TTL30kHz and Analog 0-3V,0-5V, optional)
Operating voltage(external PCB3)	5-12VDC(TTL30kHz and Analog 0-3V,0-5V, optional)
Connection	Cable with flying leads

ENVIRONMENTAL CONDITIONS

Operating temperature	0°C to 40°C
Storage temperature	-20°C to 80°C
Humidity	< 90%, non-condensing
Dissipated heat	< 1.8W

MECHANICAL SPECIFICATIONS


Laser head diameter Φ	mm	8
Length	mm	15
Material		Aluminum
Shell polarity		The housing is isolated.

*All testing data under the conditions of temperature 25°C.




中国长春新产业光电技术有限公司
Changchun New Industries Optoelectronics Tech. Co., Ltd


Dimensions of laser($\Phi 8 \times 15\text{mm}^2$)

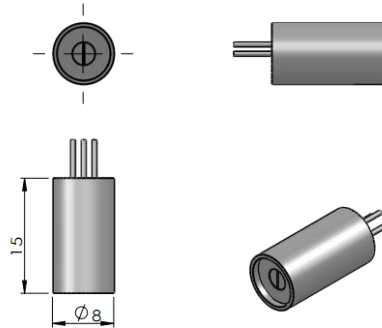


Dimensions of PCB1(*small size*, $9 \times 12\text{mm}^2$, 6V)

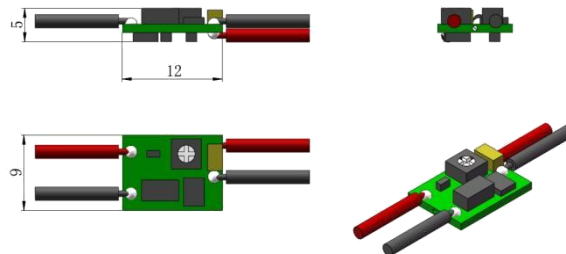

Dimensions of PCB2($11 \times 25\text{mm}^2$, DC5V, TTL and Analog)

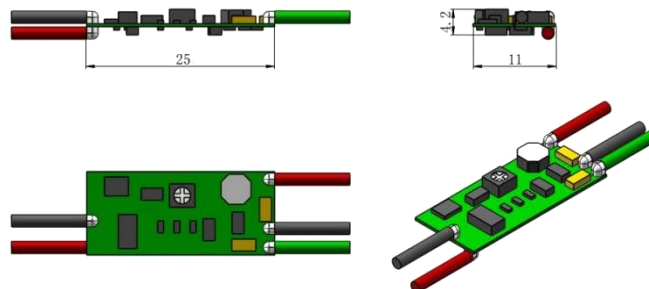

Dimensions of PCB3($20 \times 30\text{mm}^2$,DC5-12V, TTL and Analog)

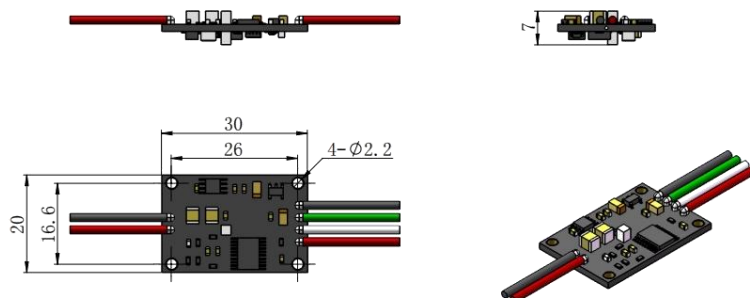




AD-6V 1A POWER ADAPTER

Input	100-240VAC 50-60Hz
Output	DC 6V 1A


Dimensions of power adapter (mm):

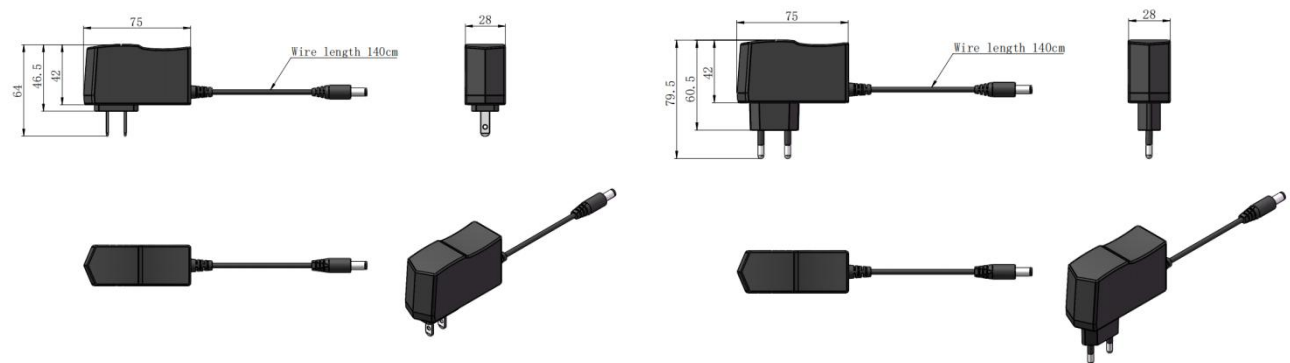

AD-5V 5A POWER ADAPTER

Input	85-264VAC 47/63Hz
Output	DC 5V 5A

Dimensions of power adapter (mm):

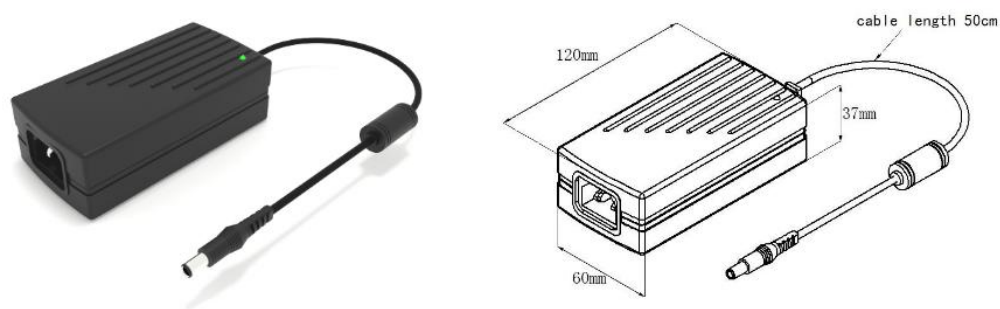

AD-12V 3.34A POWER ADAPTER

Input	100-240VAC 50/60Hz
Output	DC 12V 3.34A

Dimensions of power adapter (mm):

