

RGB-xxx



RGB-xxx Laser System

RGB-xxx series laser system can combine 3 wavelengths into a system and output in free space. It can control the laser output either separately, or open multiple lasers at the same time.




SPECIFICATIONS

Wavelength combination (nm)	473/589/685	488/561/640
Wavelength (nm)	±1/±1/±5	±5/±1/±5
Operating mode	CW	
Output power (mW)	20/20/20	50/50/50
Power stability (rms, over 4 hours)	<3%, <2%, <1%	
Transverse mode	TEM ₀₀	
Noise of amplitude (rms, 20Hz~20MHz)	<1%	
Beam diameter at the aperture (mm)	~1.0	
Beam divergence, full angle (mrad)	<1.5	
Ellipticity	>0.90	
M ² factor	~1.1	
Warm-up time (minutes)	<5	
Beam height from base plate (mm)	40	
Operating temperature (°C)	10~35	
Power supply (100-240VAC)	RGB-31	
Modulation optional	TTL on/off, 1Hz-1kHz, 1kHz-10kHz, 10kHz-30kHz; and Analog modulation optional	
Expected lifetime (hours)	10000	
Warranty	1 year	

Remark: Please consult CNI for customized configurations and modifications available.


Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068

RGB-xxx

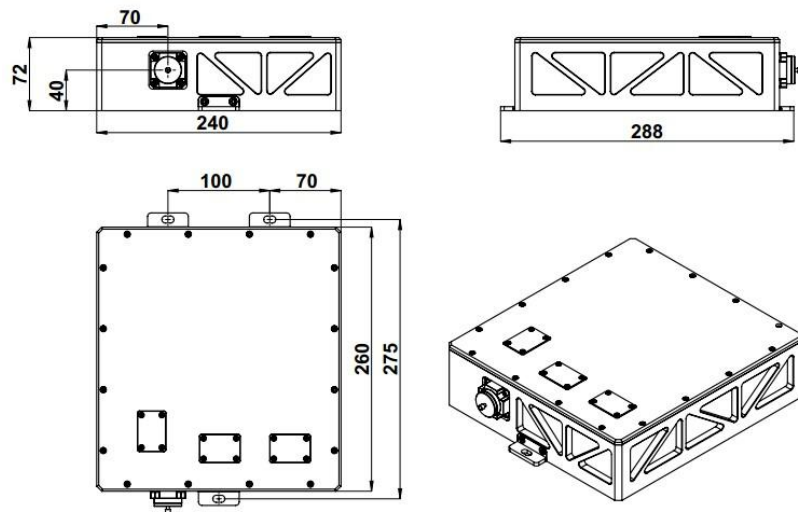

288 (L) × 240 (W) × 72 (H) mm³

RGB-31

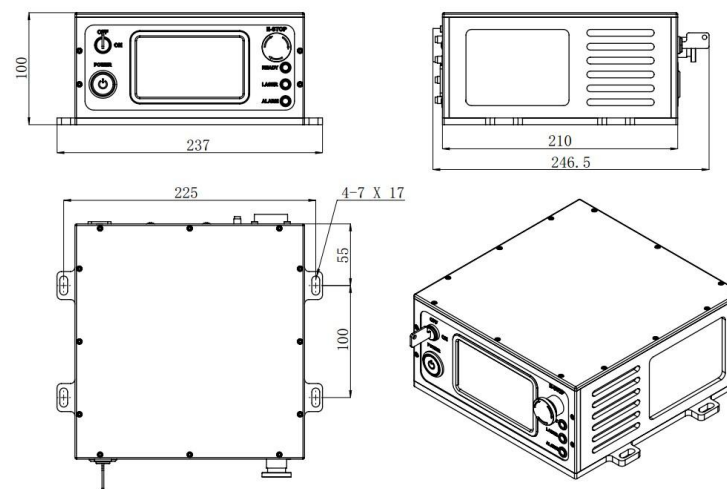

246.5 (L) × 237 (W) × 100 (H) mm³