

TEM-FN-637/1-180mW



RED DIODE LASER AT 637nm




It features TEM₀₀ mode, ultra compact design, long lifetime, cost-effectiveness and easy operation. They are used in measurement, communication, spectrum analysis, etc



SPECIFICATIONS

Central wavelength (nm)	637±5
Operating mode	CW
Output power (mW) ¹	1-180
Power stability (rms, 4 hours ± 3°C)	<2%, <1%, <0.5%
Transverse mode	TEM ₀₀
Ellipticity	>0.95
M ²	<1.1
Beam diameter at the aperture (1/e ² , mm)	~1.0
Beam divergence, full angle (mrad)	<1.5
Warm-up time (minutes)	<5
Beam height from base plate (mm)	27.4
Operating temperature (°C)	25±3
Power supply (100-240VAC)	PSU-III-FDA/PSU-III-LED
Modulation option	DC-1kHz, 1kHz-10kHz, 10kHz-30kHz optional; TTL and Analog optional
Expected lifetime (hours)	>10000

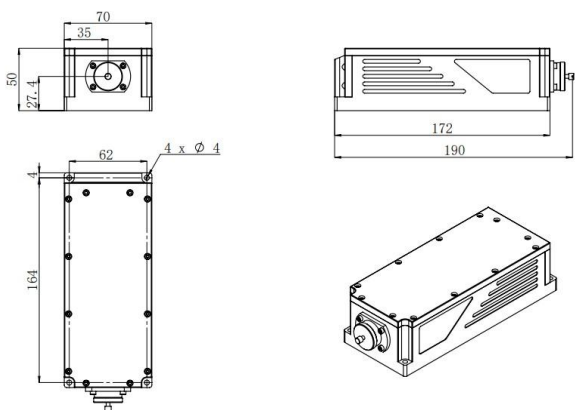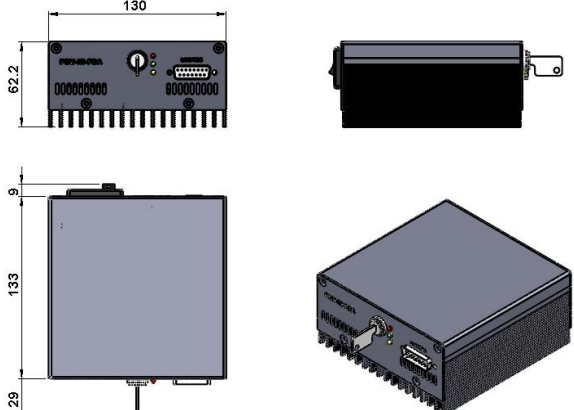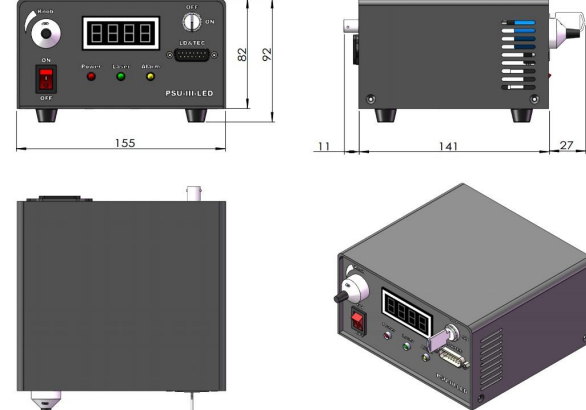

LASER HEAD ²	POWER SUPPLY (PSU-III-FDA) ³	POWER SUPPLY (PSU-III-LED) ⁴
 190 (L) × 70 (W) × 50 (H) mm³, 0.9kg	 171 (L) × 130 (W) × 62.2 (H) mm³, 1.2kg	 179 (L) × 155 (W) × 92 (H) mm³, 1.5kg

1 Any power level can be selected in this range.

2 The laser head needs to be used on a heat sink with good heat dissipation.

3 Fixed output power; Modulation up to 30kHz.

4 Output power adjustable 10-100%; RS232 control optional; Modulation up to 30kHz.

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-89216068