

NAFS Series Adjustment Screw

Description:

NAFS is based on ACFS series thread, we adopt 0.1mm/0.2mm pitch in this products to reach ultimate precision adjustment.

Naming rule:

NAFS 6 - M6 - 0.2P

Series code:
NAFS(New Adjustable Fine
Screw): fine adjustment screw


Adjustment
range:
6: 6.5mm
13: 13mm

Thread:
M4: 4mm
M6: 6mm


Pitch:
0.1P: 0.1mm
0.2P: 0.2mm

Dimensions:


NAFS6-M4-0.1P

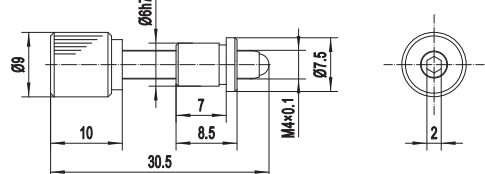


NAFS13-M4-0.1P

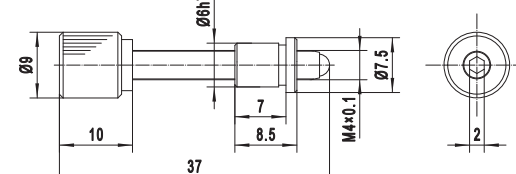

NAFS6-M6-0.1P

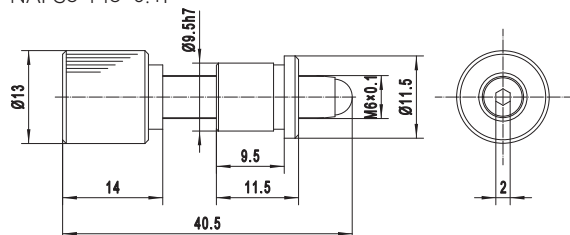


NAFS13-M6-0.1P

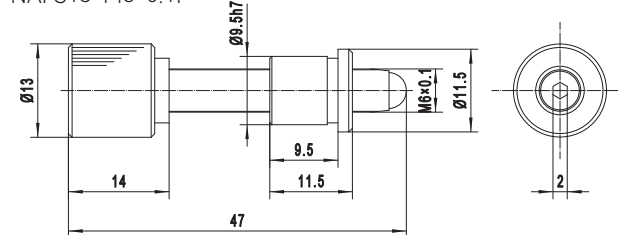


Model	NAFS6-M4-0.1P	NAFS13-M4-0.1P	NAFS6-M6-0.1P	NAFS13-M6-0.1P
Translation Range(mm)	6	13	6	13
Adjustment Screw and Pitch	M4×0.1		M6×0.1	
Mounting Diameter(mm)	Ø6		Ø9.5	
Mounting Length(mm)	7		9.5	
Overall Length(mm)	30.5	37	40.5	47
Thumb Wheel Diameter(mm)	Ø9		Ø13	


NAFS6-M4-0.2P

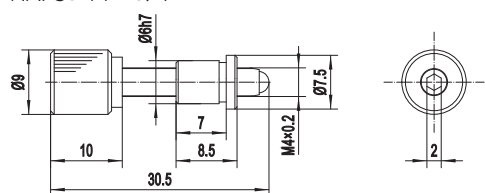


NAFS13-M4-0.2P

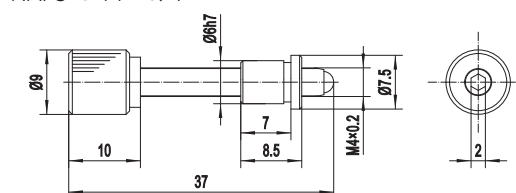

NAFS6-M6-0.2P

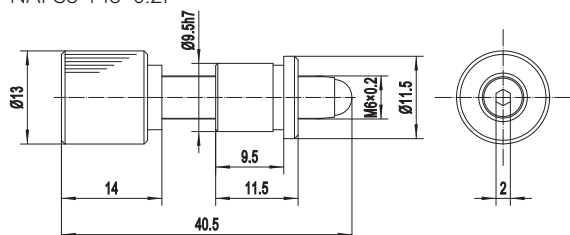


NAFS13-M6-0.2P

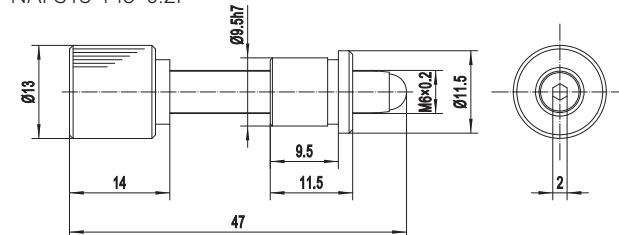


Model	NAFS6-M4-0.2P	NAFS13-M4-0.2P	NAFS6-M6-0.2P	NAFS13-M6-0.2P
Translation Range(mm)	6	13	6	13
Adjustment Screw and Pitch	M4×0.2		M6×0.2	
Mounting Diameter(mm)	Ø6		Ø9.5	
Mounting Length(mm)	7		9.5	
Overall Length(mm)	30.5	37	40.5	47
Thumb Wheel Diameter(mm)	Ø9		Ø13	


AUS12.7-3.0

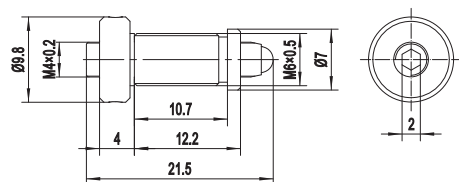


AUS25.4-3.0

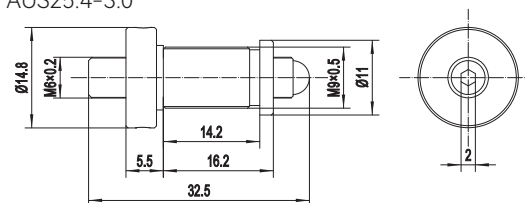

NLXY25.4-6.0

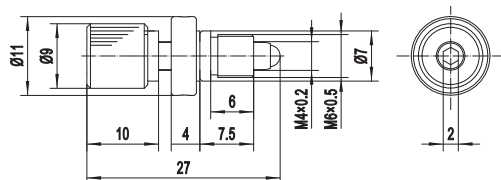

NLXY50.8-6.0

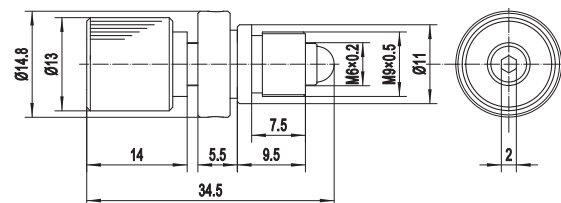

Model	AUS12.7-3.0	AUS25.4-3.0	NLXY25.4-6.0	NLXY50.8-6.0
Translation Range(mm)	4	8.5	4	4
Adjustment Screw and Pitch	M4×0.2	M6×0.2	M4×0.2	M6×0.2
Mounting Size(mm)	M6×0.5	M9×0.5	M6×0.5	M9×0.5
Mounting Length(mm)	10.5	14	6	7.5
Overall Length(mm)	21.5	32.5	27	34.5
Thumb Wheel Diameter(mm)	/		Ø9	Ø13
Locking Direction	Axial locking			