



Selection table:

Model	OMHS12.7-C(S)	OMHS20-C(S)	OMHS25-C(S)	OMHS25.4-C(S)	OMHS30-C(S)	OMHS38.1-C(S)	OMHS50-C(S)	OMHS50.8-C(S)
Optic Size A(mm)	Ø12.7	Ø20	Ø25	Ø25.4	Ø30	Ø38.1	Ø50	Ø50.8
Optic Edge Thickness(mm)	3~5					4~8		
Angular Range(°)	±3							
Travel Range(Z axis)(mm)	MAX6							
Clear Aperture B(mm)	Ø11	Ø18	Ø23	Ø23	Ø28	Ø35	Ø47	Ø47
Optical Axis Height(mm)	25	25	25	25	27.5	35	35	35
Resolution: angular adjustment per revolution(°)	≈0.39	≈0.39	≈0.39	≈0.39	≈0.39	≈0.25	≈0.25	≈0.25
Main Body Material and Surface Treatment	Black anodized aluminium alloy							
Thickness of The Fixed Plate(mm)	18							
Number of Pulling Spring	2					4		
Mounting Hole	M6, Ø8 counter bore							
Net Weight(g)	157 (168)	152 (164)	146 (158)	145 (156)	132 (144)	234 (245)	205 (216)	202 (213)



Note: -S is a locking type

Dimensions:



OMHS12.7/20/25/25.4-C

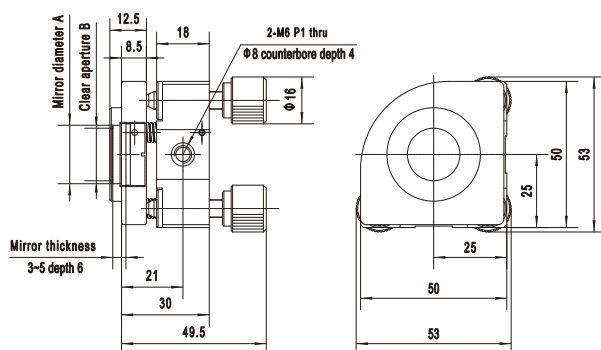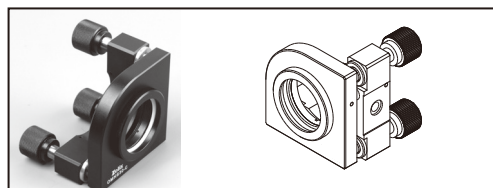

OMHS12.7/20/25.4-CS

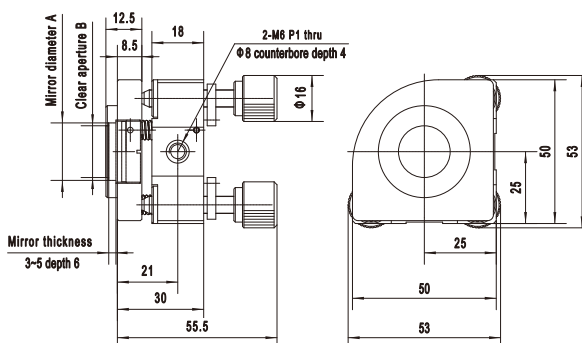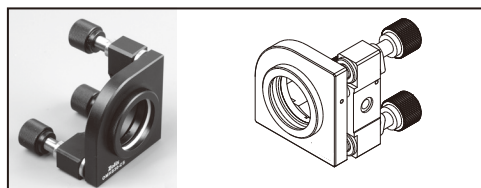

OMHS30-C

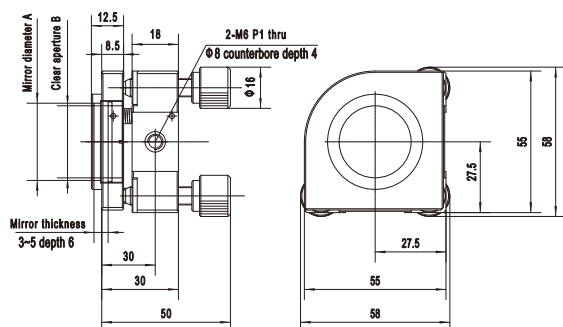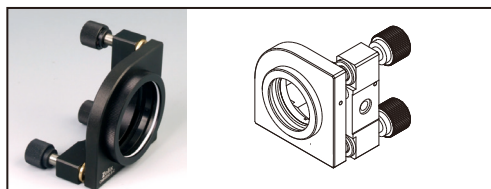

OMHS30-CS

