PHOTONIC SCIENCE



Cooled VGA Vis-SWIR InGaAs Camera

Quantitative SWIR imaging and spectroscopy

The camera uses selected back thinned InGaAs focal plane arrays with low dark current and low defective pixel count.

Thanks to efficient cooling and stable offset, the InGaAs camera allows reproducible acquisition for precise metrology measurements in the Vis-SWIR spectrum.

Camera Link and Gigabit Ethernet Vision compliant interface enables easy integration into existing systems.

OEM versions with special form factors / cooling options are available for integration into specific instruments / systems.

Key Features

- 14-bit digitization / 16-bit image processing
- Read out noise
  down to typically <30 electrons
- >200 fps
  with region of interest ROI
- Excellent linearity
  response to varying intensities and / or exposures
- Gigabit Ethernet & Camera Link interface
- Software option:
  SDK kit, Labview VI's

Applications

Available with passive cooling

Semiconductor inspection

Vis-SWIR handheld vision enhancement

Vis-SWIR airborne payload

Photoluminescence for solar cells

Air cooling or water cooling for long exposure

Astronomy

Hyperspectral imaging

Laser beam profiling

Spectroscopy

Specialist Camera Solutions Industrial | Surveillance | Scientific


PRECISOMETER
Official representative of Photonic Science

info@precisometer.com
precisometer.com/photonic-science


PHOTONIC SCIENCE

Cooled VGA Vis-SWIR InGaAs Camera


Characteristics	PSEL VGA 15µm
Spectral Range	600 - 1700 nm
Resolution	640 x 512
Sensor Size	9.6 mm x 7.68 mm
Frame Rate	174 fps at full VGA resolution 570 fps at ¼ VGA resolution 7,200 fps at 640x4 resolution (spectroscopy or line mode)
Pitch	15µm x 15µm
Full Well Capacity	20k - 23k electrons (high gain mode) 80k - 105k electrons (mid gain mode) 1.0M - 1.5M electrons (low gain mode)
Read Out Noise	28 - 40 electrons (high gain mode)
Reading Mode	Integrate Then Read, Integrate While Read
Dark Current	1 fA uncorrected, approx. 0.2 fA with corrections with air cooling 0.2 fA uncorrected, approx. 0.05 fA with corrections with water cooling
Sensor Temperature (°C)	-25°C with air cooling, -50°C with water cooling (lower dark current)
Corrections	Non uniformity, bright pixel, gain, offset, flatfield
ADC	14-bit with 16-bit digital processing
Exposure	30 microseconds up to > 1 minute
QE at 1350 nm	82%

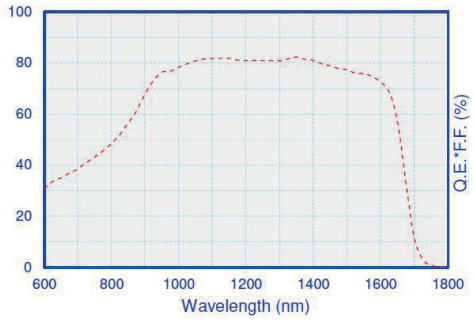

Quantum efficiency response of Cooled Vis-SWIR InGaAs camera

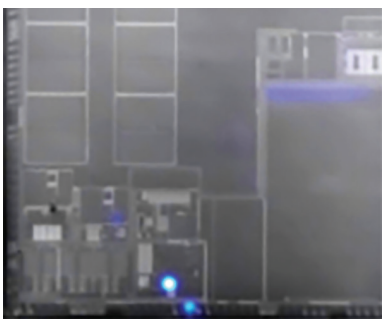

Photoemission microscopy on IC using water cooled Vis-SWIR InGaAs camera, with 20x objective, exposure time 30s

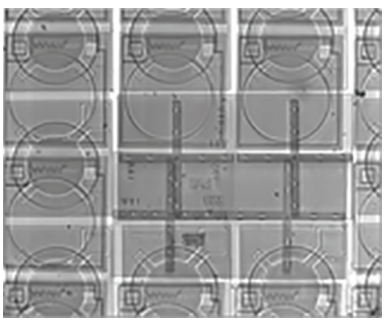

Transmission infrared microscopy of MEMS wafers using Vis-SWIR InGaAs camera with 6x objective, exposure time 15ms

T +44 (0)1424 444883
E info@photonicscience.com
www.photonicscience.com

22 Theaklen Drive, Saint Leonards-on-sea,
TN38 9AZ, United Kingdom

Cooled VGA Vis-SWIR InGaAs Camera 20190512/33 DB Iss1

PRECISOMETER

Official representative of Photonic Science

Product selection, configuration & integration support

Office & enquiries
Precisometer B.V.
Eisingastraat 9
2201 DJ Noordwijk, Netherlands

Talk to Precisometer
info@precisometer.com
precisometer.com/photonic-science

Explore products & discuss your experiment