


0.26mm Motion etMEMS™ Free Space Attenuator Chip

(Protected by US patents pending)



DATASHEET

[Return to the Webpage](#)



Features

- Compact
- High Reliability
- Low IL, PDL, WDL & TDL
- Intrinsic tolerance to ESD

Applications

- Power Control
- Power Regulate
- Channel Balance
- Instrumentation

The etMEMS™ series of free space variable optic attenuator (FS-VOA) is based on a proprietary patent pending micro-electro-mechanical mechanism featuring exceptionally compact size with large shutter movement, simple construction, and direct drive. The etMEMS™ series of FS-VOA is designed to completely block a collimated light beam $\leq 260\mu\text{m}$ in diameter and be operated in air without the need for hermetic seal and is fully compliant with the Telcordia 1209 and 1221 reliability standards. The device is ideally suited to be integrated into laser and coherent detection systems.

The different movement FS-VOA chip up to $700\mu\text{m}$ is available, please contact us.

Specifications

Parameter	Min	Typical	Max	Unit
Attenuation Resolution		Continuous		
Shutter Movement		260		μm
Response Time		20	60	ms
Optical Power Handling		400		mW
Driving Voltage ^[1]		3.5	4	V
Device Resistance		60 ^[2]	95	Ohm
Power Consumption		190	210	mW
Resonant Frequency	1000			Hz
Operating Temperature	-5		75	°C
Storage Temperature	-40		85	°C
Reliability	Telcordia 1209 and 1221			
Package Dimension	See drawing below			

Note:

- [1]. For full dynamic range.
[2]. At voltage 3.5V.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 02/08/25

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


0.26mm Motion etMEMS™ Free Space Attenuator Chip



(Protected by US patents pending)

DATASHEET

Mechanical Footprint Dimensions (mm)

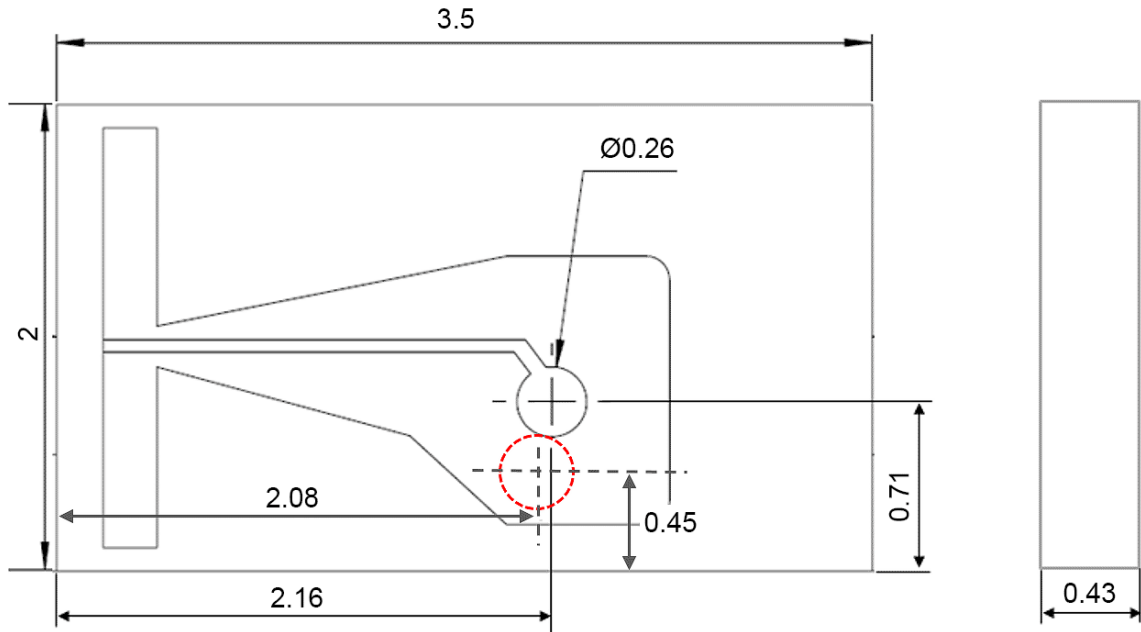


NOTE:

The red dash-line represents the shutter position under ~3.5V.

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

VOA Performance

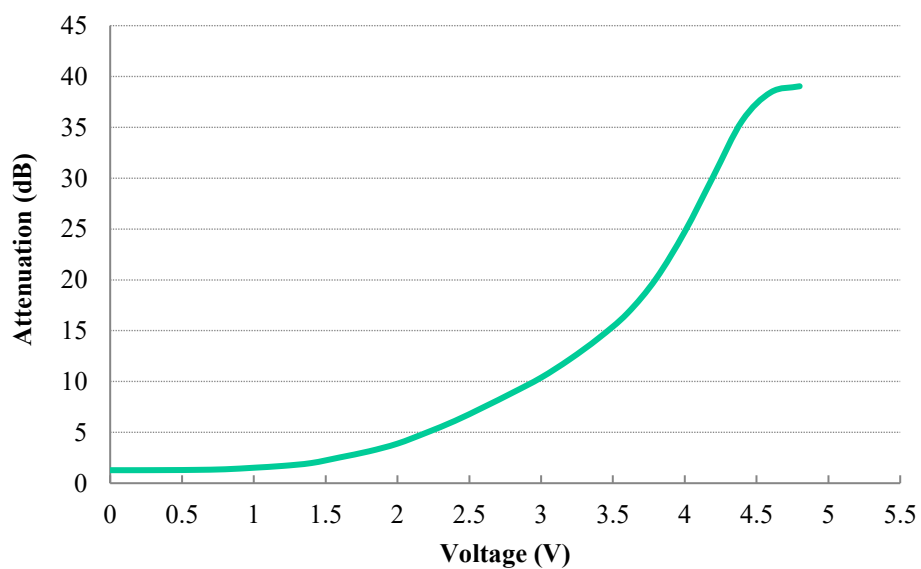

0.26mm Motion etMEMS™ Free Space Attenuator Chip



(Protected by US patents pending)

DATASHEET

Electronic Driving Instruction

NOTES:

- Electrode pads on front surface are for control voltage without polarity.
- Do not apply more than 5V.

Ordering Information (Part Number)

P/N: FSVOA-26111010C (New standard)

FSVOA-261110101-C (Old)

	26	1	☐	1	☐	☐	0	C
Prefix	Shutter size	Wavelength	VOA Type	Shutter Surface	Chip Package	Chip Design	Electric connection	
FSVOA-	Ø260µm ^[1] = 26	Broadband = 1	Standard = 1 Special = 0	Gold = 1	Bare = 2 Sub-mount ^[2] = 1 Special = 0	Standard = 1 Special = 0	No PIN = 0	

[1]. Different shutter size is available, please check another size FS-VOA chip datasheet.

[2]. Flying wires type; two leads are provided

0.26mm Motion etMEMS™ Free Space Attenuator Chip



(Protected by US patents pending)

 DATASHEET

Typical Insertion Loss vs Wavelength (1240-1630nm)

