

Electro-Absorption Modulated Laser (EML)

12GHz



DATASHEET

[Return to the Webpage](#)



Features

- High Optical Output Power
- Low Modulation Voltage
- Wide Bandwidth
- Excellent Stability

Applications

- Optical Communication
- Quantum Optics
- DWDM Systems



The EMLT Series Electro-Absorption Modulated Laser Transmitter is a semiconductor laser that integrates a distributed feedback (DFB) laser and an electro-absorption modulator (EAM) within a single package. This design eliminates the need for external modulators, reducing system complexity, power consumption, and size while improving thermal management. Capable of modulation speeds up to 20 GHz for both analog and digital responses, the EMLT delivers high-speed modulation with precise optical output control. The integrated EAM minimizes wavelength shifts during modulation, ensuring stable signal transmission over long distances, making the EMLT ideal for high-speed optical communication systems. Its compact and efficient design is well-suited for modern applications requiring reliable, high-performance data transmission. The laser wavelength can be made to match a specific ITU for a special order.

Specifications

Parameter	Min	Typical	Max	Unit
Wavelength (C-Band)	1520	1550	1590	nm
Laser Threshold Current		20		mA
Laser Current		40	60	mA
Laser Bias Voltage			2.5	V
Forward Voltage		2	3	V
Modulation Extinction Ratio	9.5	12		dB
Side Mode Suppression Ratio	30	40		dB
Output Power	1.5	3	10	mW
Bandwidth (3dB)	10		16	GHz
Return Loss	-27	-30		dB
Input 1 dB Compression	15			dBm
Relative Intensity Noise	-130			dB/Hz
Input RF Amplitude			2.5	V
RF Connector		2.92 mm F		
Thermistor Resistance		10		kΩ
TEC Current*			1.5	A
Monitor PD Current			3	mA
Monitor Dark Current			100	nA
Operation Temperature	-40	25	85	°C
Storage Temperature	-40		85	°C

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 06/16/26

[+1 781-935-1200](tel:+17819351200)

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


Electro-Absorption Modulated Laser (EML)

12GHz




 DATASHEET

Dimensions (mm)

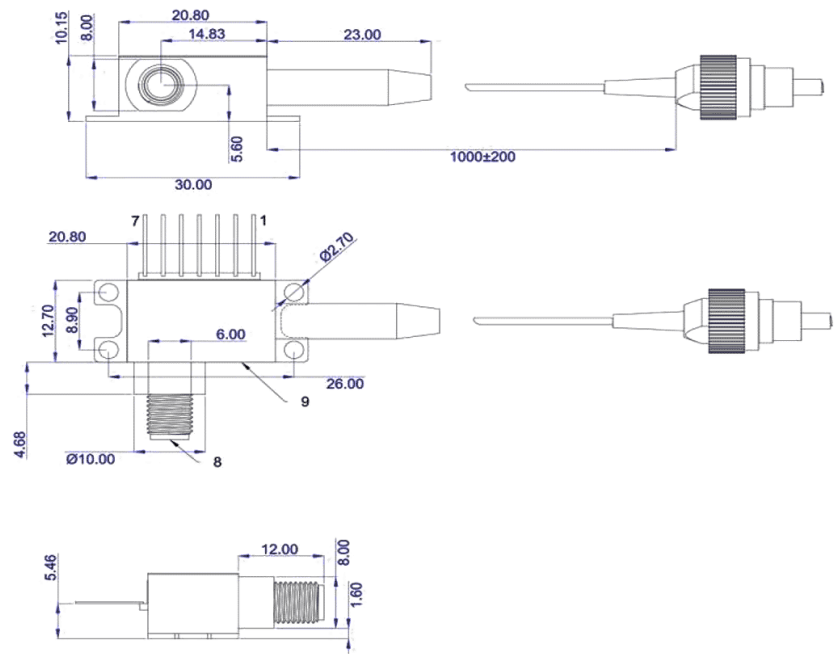

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Electrical Connection



Pin	Function
1	Thermistor
2	Thermistor
3	LD+
4	PD-
5	PD+
6	TEC+
7	TEC-

Electro-Absorption Modulated Laser (EML)

12GHz



DATASHEET

Ordering Information (Part Number)

Prefix	Speed	Wavelength	Output Fiber	Cable	Fiber Length	Connector ^[1]
EMLT-	10GHz = A 12GHz = 1 16GHz = 6	1549.55 nm = 4955 1550.55 nm = 5055 1528.8 nm = 2880 1530.3 nm = 3030 1531.1nm = 3110 1533.4 nm = 3340 1534.3 nm = 3430 1535.8 nm = 3580 1538.2 nm = 3820 1539.0 nm = 3900 1539.8 nm = 3980 1540.8 nm = 4080 1541.4 nm = 4140 1542.1 nm = 4210 1545.3 nm = 4530 1546.1 nm = 4610 1547.7 nm = 4770 1550.1 nm = 5010 1551.7 nm = 5170 1552.6 nm = 5260 1553.3 nm = 5330 1554.1 nm = 5410 1555.8 nm = 5580 1556.6 nm = 5660 1557.4 nm = 5740 1558.2 nm = 5820 1559.0 nm = 5900 1559.8 nm = 5980 1560.6 nm = 6060 1561.4 nm = 6140 1562.2 nm = 6220 1563.1 nm = 6310 1563.8 nm = 6380	SM28 = 1	0.9mm tube = 1	0.5m = 1 Special = 0	None = N SC/PC = 1 FC/PC = 2 LC/PC = 3 Special = 0

[1]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Electro-Absorption Modulated Laser (EML)


12GHz



DATASHEET

Typical Performance

S21

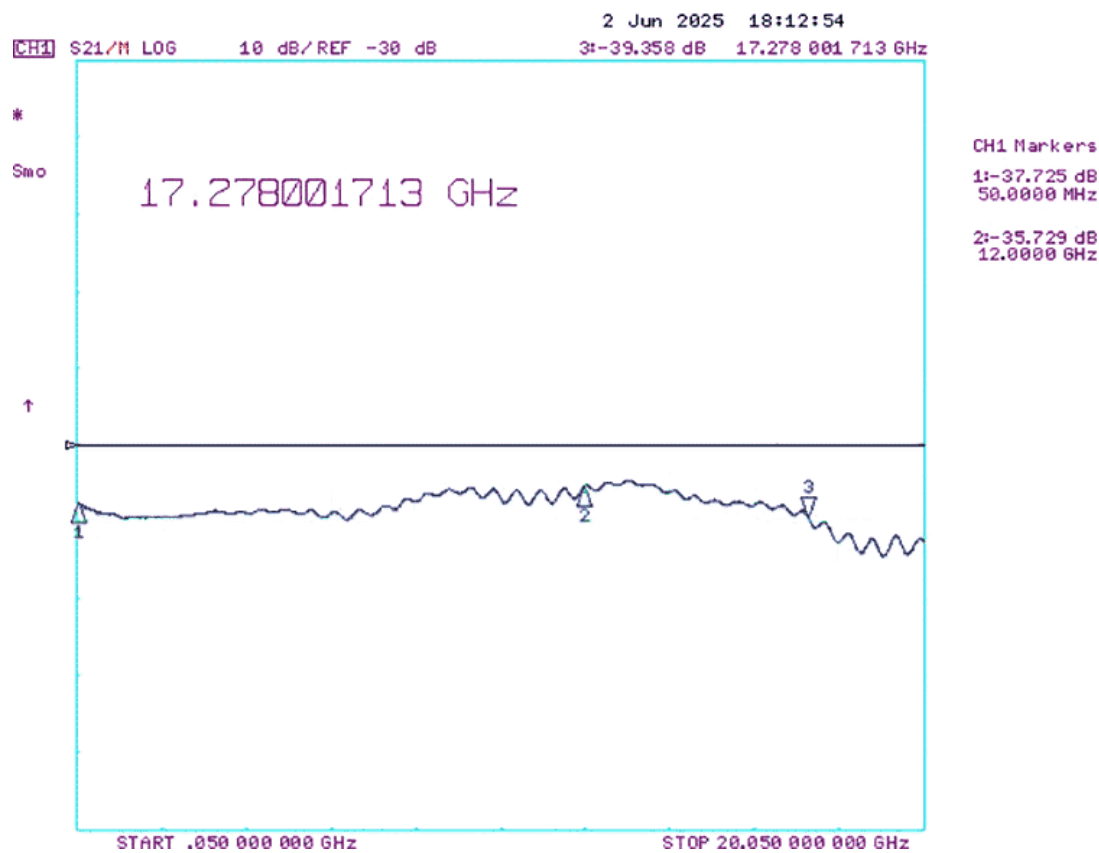

Electro-Absorption Modulated Laser (EML)

12GHz



DATASHEET

Caution Electrostatic Sensitivity



- Never touch laser diode and the module using hands
- Always use protections when handle a laser diode
- Recommend mounting the laser diode using an ionic gun and ESD finger cots




Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. This device has been classified with the FDA/CDRH under accession number 0220191. All versions of this laser are Class 1M laser products, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example telescopes and binoculars) may pose an eye hazard.

Wavelength = 1.3/1.5 μm .

Maximum power = 30 mW.

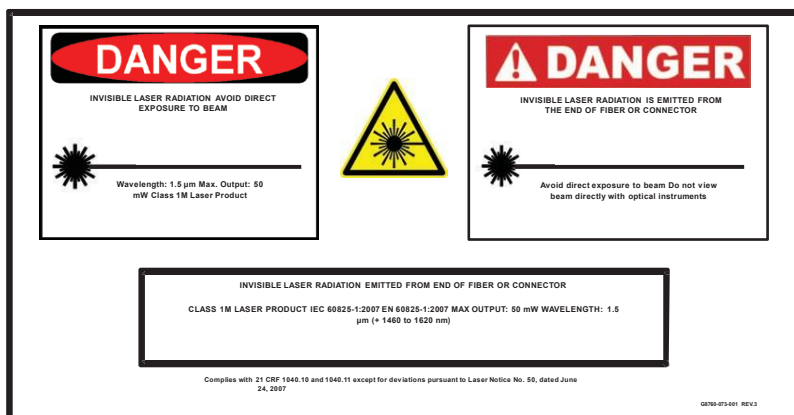

*Caution - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
*IEC is a registered trademark of the International Electrotechnical Commission.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.