

2 μ m 20W Fiber to Free Space Isolator

(polarization independent and polarization maintain, 5W, 20W)



DATASHEET

BUY NOW



Features

- High Power Handling
- Low IL
- High Isolation
- High Reliability & Stability
- Cost Effective

Applications

- Laser Pump Source
- Optical Fiber Amplifier
- Laser Manufacturing
- Test and Measurement

This 2 μ m Fiber to Free Space High Power Isolator is characterized with low insertion loss, high isolation high power handling, high return loss, excellent environmental stability and reliability. It is ideal for fiber laser and instrumentation applications.

Specifications

Parameter	Min	Typical	Max	Unit
Operating Wavelength		2000 $\pm$ 30		nm
Insertion Loss ^[1]		0.5		dB
Isolation ^[1]		35		dB
Extinction Ratio (PM only)		20		dB
Output Beam Diameter		4.9 $\pm$ 0.5		Mm
Return Loss		45		dB
Optical Power Handling ^[2]		5, 20		W
Peak Power for ns Pulse		10		kW
Fiber Type		SMF-28e / PM1550		
Operating temperature	+10		+60	°C
Storage temperature	-40		+85	°C

Notes:

[1]. Measured without connectors at center wavelength and 25°C

[2]. Continuous operation

Note: For a polarized input light version, the isolation is optimized to block the light reflection of the same polarization. Although lights of other polarizations may also be blocked, the extinction may be poor. PM isolators can be specially made to block backward propagating lights of all polarizations. PM isolators can also be made with a light polarizing function.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 04/02/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


2 μm 20W Fiber to Free Space Isolator

(polarization independent and polarization maintain, 5W, 20W)



DATASHEET

Mechanical Dimensions (mm)

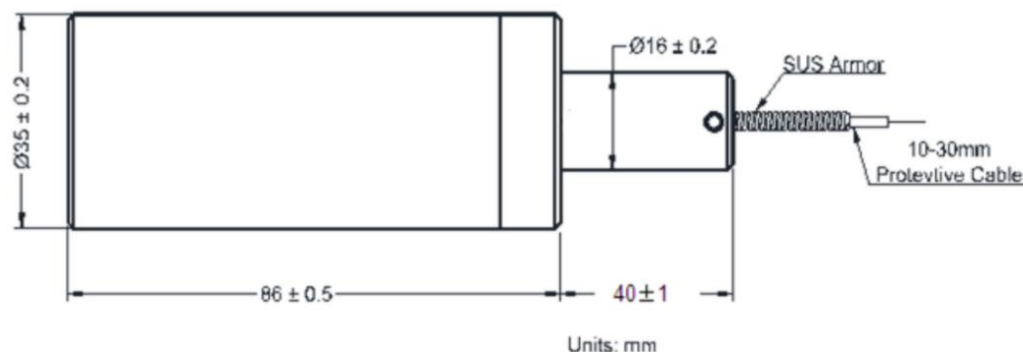

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information (Part Number)

	A	☐ ☐	☐ ☐	☐	☐	☐	☐
Prefix	Wavelength	Power Handling	Fiber Type	Fiber Cover	Fiber Length	Connector ^[1]	
HPFI-	2000 = 20 Special = 00	5W = 05 20W = 20	SMF-28e = 1 PM 1550 = 2 Special = 0	Bare fiber = 1 900um loose tube = 2 3mm steel cable = 3 6mm steel cable = 6 Special = 0	0.75m = 1 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/APC = A LC/UPC = U Special = 0	

[1]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

2 μm 20W Fiber to Free Space Isolator

(polarization independent and polarization maintain, 5W, 20W)



DATASHEET

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters ($<5 \mu\text{m}$) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the handling by expanding the core side at the fiber ends.