


# 633nm Butterfly Laser Diode

Up to 40mW, PM



DATASHEET

[Return to the Webpage](#)

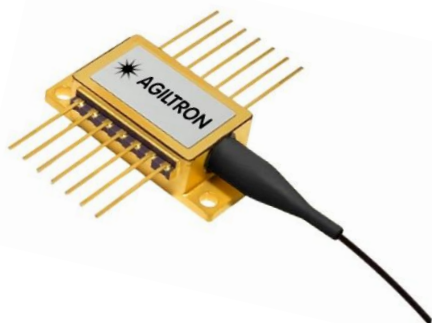

The 980nm series laser diodes are fabricated in a hermetically sealed 14-pin butterfly package. The laser diodes contain a monitor photodiode, thermoelectric cooler (TEC), and a thermistor to secure high-quality laser performance. Our laser products are Telcordia GR-468 qualified and in compliance with RoHS Directives.

A matching driver is available in either a compact module or benchtop turn-key unit.

Due to their high sensitivity to electrostatic discharge, warranty coverage applies only to fully metal covered modules the benchtops, which include proper protection. Other versions of the lasers and photodetectors are not covered by any warranty. Please use them with great caution.

## Features

- Up to 40mW
- Industry Standard 14-pin Butterfly Package
- High Reliability
- RoHs
- Telcordia GR468

## Applications

- Instrument
- Fiberoptic Sensor



## Specifications

| Parameter                              | Min  | Typical | Max       | Unit  |
|----------------------------------------|------|---------|-----------|-------|
| Threshold Current                      |      | 70      |           | mA    |
| Forward Current                        |      | 180     | 250       | mA    |
| Forward Voltage                        |      | 2.7     | 2.9       | V     |
| Optical Output Power                   | 35   | 40      |           | mW    |
| Center Wavelength                      | 631  | 633     | 636       | nm    |
| Wavelength v/s Temperature Coefficient | 0.06 |         | 0.1       | nm/°C |
| Spectral Linewidth (FWHM)              |      | 0.5     | 1.5       | nm    |
| Rise Time in Pulse Mode                |      | 0.5     |           | ns    |
| Monitor Current @ VrPD=5V              | 0.07 |         |           | mA    |
| PD reverse voltage                     |      |         | 20        | V     |
| TEC Current                            |      |         | 2         | A     |
| Thermistor Resistance @25°C            | 9.5  | 10.0    | 10.5      | kΩ    |
| Thermistor B Constant                  |      | 3900    |           | K     |
| TEC Voltage                            | -2.5 |         | +2.5      | V     |
| Thermistor Temperature                 | -20  |         | 65        | °C    |
| ESD                                    | -500 |         | +500      | V     |
| Operating Case Temperature             | 0    |         | +60       | °C    |
| Storage Temperature                    | -40  |         | +85       | °C    |
| Lead Soldering Temperature             |      |         | 260 (10s) | °C    |

Rev 02/24/26

[+1 781-935-1200](tel:+17819351200)

[sales@agiltron.com](mailto:sales@agiltron.com)

[www.agiltron.com](http://www.agiltron.com)

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


# 633nm Butterfly Laser Diode

Up to 40mW, PM




## DATASHEET

### Mechanical Dimension (mm)

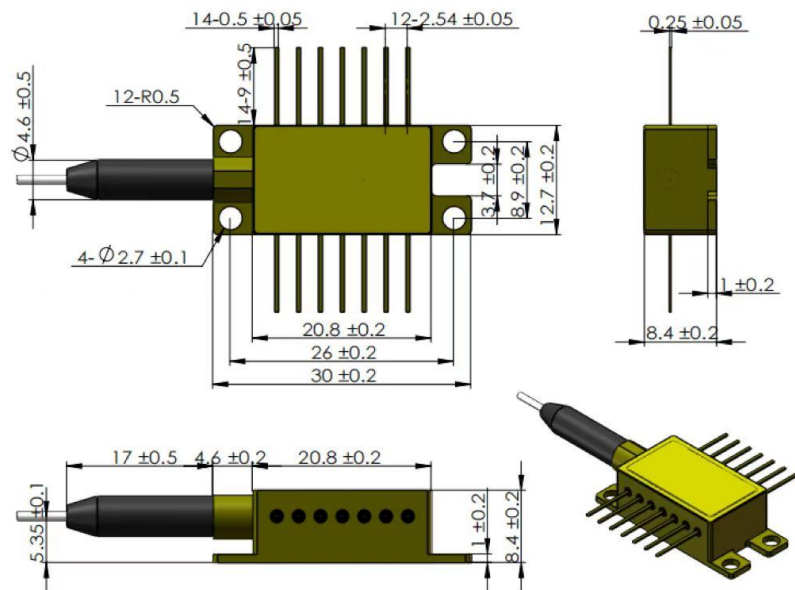

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

### PIN Assignment

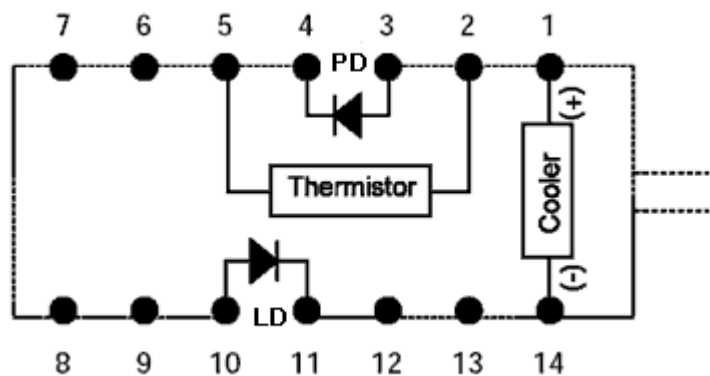

| PIN | Function                  |
|-----|---------------------------|
| 1   | Thermoelectric Cooler (+) |
| 2   | Thermistor                |
| 3   | Monitor PD Anode (-)      |
| 4   | Monitor PD Cathode (+)    |
| 5   | Thermistor                |
| 6   | NC                        |
| 7   | NC                        |
| 8   | NC                        |
| 9   | NC                        |
| 10  | Laser Anode (+)           |
| 11  | Laser Cathode (-)         |
| 12  | NC                        |
| 13  | NC                        |
| 14  | Thermoelectric Cooler (-) |

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


# 633nm Butterfly Laser Diode

Up to 40mW, PM



## DATASHEET

### Typical Spectrum

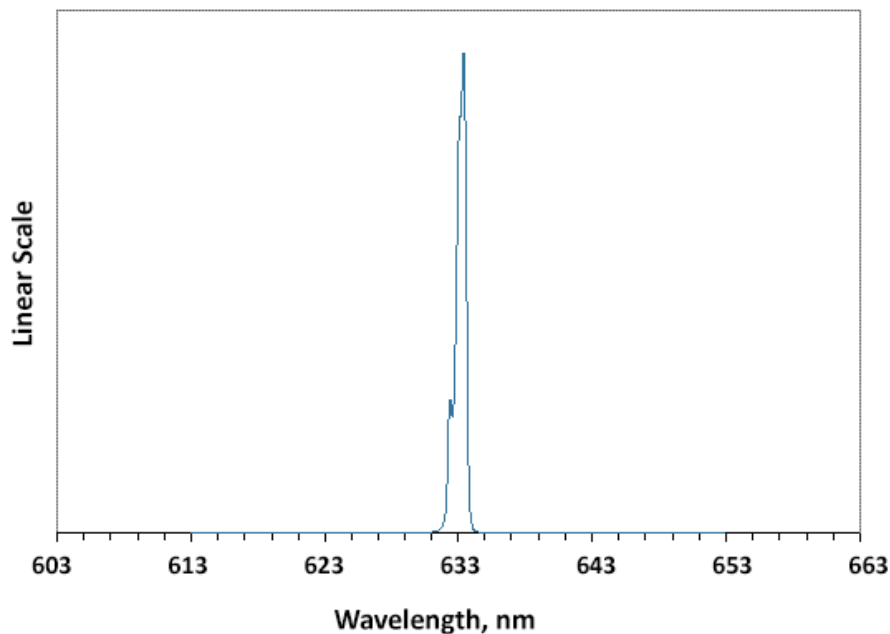

### Ordering Information (Part Number)

|              | <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>                                        | <input type="checkbox"/>      | <input type="checkbox"/> | <input type="checkbox"/>  |
|--------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------|--------------------------|-----------------------------------------------------------------|-------------------------------|--------------------------|---------------------------|
| Prefix       | Wavelength                                                                                          | Output Power                                      | PD                       | Fiber Type                                                      | Fiber Buffer                  | Fiber Length             | Connector <sup>[1]</sup>  |
| <b>FLBF-</b> | 633nm = 0633<br>Special = 0                                                                         | 40mW = 04                                         | None = 1<br>Yes = 2      | SM450 = 3<br>SM600 = 6<br>PM460 = B<br>PM630 = C<br>Special = 0 | 0.9mm Tube = 3<br>Special = 0 | 0.5 m = 1<br>Special = 0 | FC/APC = 3<br>Special = 0 |

[1]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

**P** +1 781-935-1200

**E** [sales@agiltron.com](mailto:sales@agiltron.com)

**W** [www.agiltron.com](http://www.agiltron.com)

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.  
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

# 633nm Butterfly Laser Diode

Up to 40mW, PM



## DATASHEET

### Benchtop Matching Laser Diode Driver



Agiltron cost-effective LDCB series benchtop control kit is designed for easy laser diode mounting and precise control. It incorporates a high-precision, low-noise auto-feedback drive electronics to ensure constant output power or a constant driving current and an integrated temperature control unit maintains optimal operating conditions. The system provides up to 1A driving current and up to 2A TEC cooling current. Each system features a front fiber output connector. The user interface includes an intuitive LCD display for independent control of output power and temperature via two front rotating knobs. The LDCB also includes a universal power supply compatible with 100 to 240 VAC. The LDCB has a built-in isolator option to prevent reflection-induced laser emissions instability. The LDCB is designed as a laser diode and TEC controller kit for customer to install laser diode. It has three types of pluggable laser mounts of butterfly, DIL, and TOCAN. The TOCAN mount contains an external TEC that maintains a constant temperature for wavelength stability.

For details please click: <https://agiltron.com/product/laser-diode-tec-controllers-benchtop-kit/>

### Turn-Key Module Matching The Laser Diode



The Agiltron LDCM series laser source module is designed for OEM applications and features all-in-one high reliability and highly stable laser output. The LDCM contains high-precision, low-noise, auto-feedback laser diode drive electronics to ensure constant output power or driving current and an integrated temperature controller that maintains optimal operating conditions. An optional fiber optical isolator can be integrated to prevent reflection-induced laser emission instability, which is essential for achieving highly stable lasers. Agiltron produces isolators from 370nm to 2600nm. The system provides up to 1A driving current and up to 2A TEC cooling current. Each unit features a single FC/APC connector output and two front rotating knobs for independent setting of laser output power and temperature. A toggle switch allows selection between constant current control mode and feedback constant output power mode.




For details please click: <https://agiltron.com/product/laser-diode-tec-controllers-module/>

### Laser Driver Kit



Agiltron cost-effective LDCD series module control kit is designed for easy laser diode mounting and precise control. It incorporates a high-precision, low-noise auto-feedback drive electronics to ensure constant output power or a constant driving current and an integrated temperature control unit maintains optimal operating conditions. The system provides up to 1A driving current and up to 2A TEC cooling current. It has three types of pluggable laser mounts of butterfly, DIL, and TOCAN. The TOCAN mount contains an external TEC that maintains a constant temperature for wavelength stability. It comes with cables to connect between the mounting module to the driving module, making integration convenient.

For details please click: <https://agiltron.com/product/laser-diode-tec-controllers-compact/>



+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

# 633nm Butterfly Laser Diode

Up to 40mW, PM



## DATASHEET

### Caution Electrostatic Sensitivity



- Never touch laser diode and the module using hands
- Always use protections when handle a laser diode
- Recommend mounting the laser diode using an ionic gun and ESD finger cots



### Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. This device has been classified with the FDA/CDRH under accession number 0220191. All versions of this laser are Class 1M laser products, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example telescopes and binoculars) may pose an eye hazard.

Wavelength = 1.3/1.5  $\mu\text{m}$ .

Maximum power = 30 mW.



\*Caution - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

\*IEC is a registered trademark of the International Electrotechnical Commission.

P +1 781-935-1200

E [sales@agiltron.com](mailto:sales@agiltron.com)

W [www.agiltron.com](http://www.agiltron.com)

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.  
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.