

Fiber Optical Receiver

(850nm, ST connector)



DATASHEET

[Return to the Webpage](#)



Features

- Compact
- Low Cost
- High Reliability
- High Coupling
- Efficiency

Agiltron optical receiver is based on a breakthrough fabrication platform technology featuring industrial leading attributes in low cost, high coupling efficiency, and stability. Our bonding material not only meets NASA's low outgas requirement, but is also capable of withstanding high temperatures (85°C). The package meet Telecordia 1221 reliability standard.

A fiber optic receiver is a device used to receive optical signals in a optical network. Optical receiver facilitates data transmissions between electronic devices (e.g., computer, input/output system, peripheral device, or switch) and optical data links in fiber optic systems. The fiber optic receiver is packaged in a stainless steel housing with ST style connector.

Due to their high sensitivity to electrostatic discharge, warranty coverage applies only to fully metal covered modules the benchtops, which include proper protection. Other versions of the lasers and photodetectors are not covered by any warranty. Please use them with great caution.

Specifications

Parameter		Min	Typical	Max	Unit
Min. Input Sensitivity				1.0	μW
High level logic output voltage	Pin < 0.1μW, I _O = 0.8 mA	4.0	5.0		V
Low level logic output voltage	Pin > 1μW, I _O = 0.8 mA			0.4	V
Rise time (0.4V to 2.4V)	FORC-118500021			12	ns
	FORC-228500021A			3	
Fall time (2.4V to 0.4V)	FORC-118500021			5	ns
	FORC-228500021A			3	
Pulse width distortion	Pin=1μW			10	%
	Pin=100μW			25	
Supply current	Pin < 0.1μW, Vcc=5V			40	mA
Optical input power		1		100	μW
Operating temperature			0 to +85		°C

Notes:

Receiver (Rx) – 850nm

Specifications: Vcc=5V, 100μm fiber, f=2.5 MHz, duty cycle=50%, 5 second warm-up time

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 11/28/25

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.




Fiber Optical Receiver

(850nm, ST connector)



DATASHEET

Mechanical Dimensions (Unit: mm)

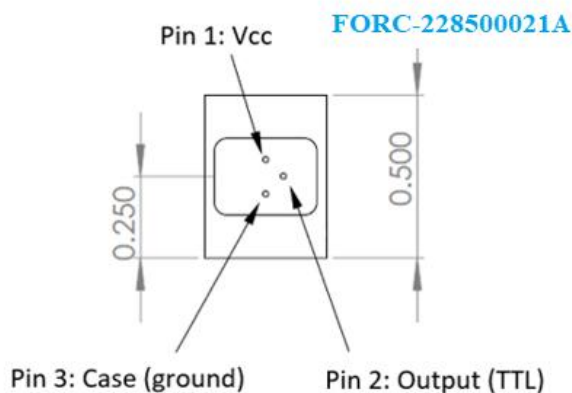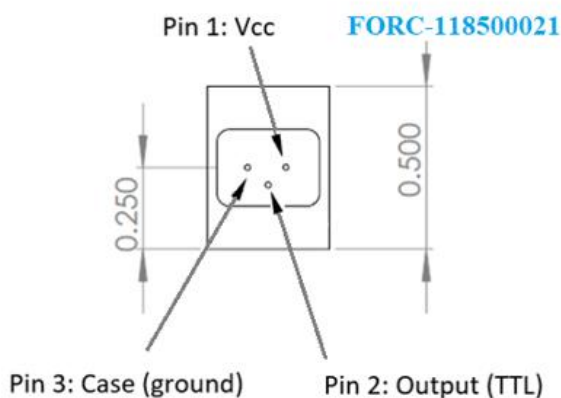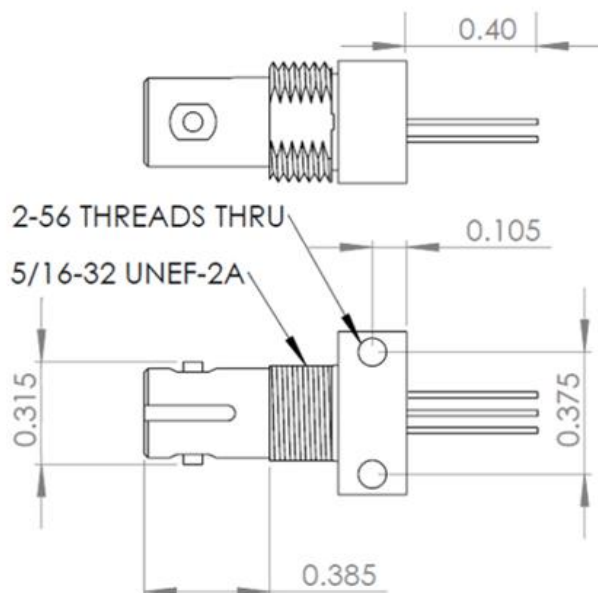

Included Hardware:

Description	Quantity
5/16-32 nut , width 3/8", thickness 3/32"	1
5/16" Internal tooth lock washer	1
2-56 x1/4 pan screw	2
#2 split lock washer	2

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information (Part Number)

Part Number:

FORC-118500021

FORC-228500021A (90deg-rotated pin layout , with TTL inverting circuit)

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Fiber Optical Receiver

(850nm, ST connector)



DATASHEET

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters ($<5\text{ }\mu\text{m}$) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.