
Butterfly high-speed photodetectors

Compact hermetic photodetector packages for broadband analog fiber-optic reception.

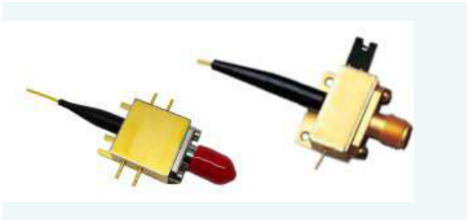

Representative series photograph. Packaging depends on configuration.

Technical specifications

Package	Hermetic butterfly
Series spectral coverage	400-1700 nm; detector dependent
Series bandwidth	Up to 70 GHz
Amplification	Unamplified and amplifier options; confirm build

Applications

Analog optical links / Microwave photonics / Optical pulse detection

Selecting your configuration

Confirm PIN or APD construction, bias arrangement and whether an RF amplifier is included. The compact package family includes different detector and readout configurations.

Series options are not guaranteed combinations. Precisometer confirms the specifications, interfaces and availability of your selected configuration in a quotation.

Product page and enquiry | info@precisometer.com