

Cooled Photodiode Si PIN

0.4 – 1.1 μm



DATASHEET

[Return to the Webpage](#)



The CPOD serials cooled Silicon photodiode provides ultra-low noise for detecting from UV to near-infrared light in the 0.4-1.1 μm range. These detectors are hermetically sealed to ensure longevity. Within the detector package, a thermoelectric cooler is integrated with a 3-stage deep cooling as well as integration with a MEMS chopper, significantly reducing background noise while maintaining a compact format. A thermistor is also included in the package to sense the Si photodiode chip temperature for stable operation. It is designed for low-light-level detection applications. Additionally, we offer driving PCB consists a precision TEC temperature controller, an amplifier, and a detector heat sink for convenient use.

Due to their high sensitivity to electrostatic discharge, warranty coverage applies only to fully metal covered modules the benchtops, which include proper protection. Other versions of the lasers and photodetectors are not covered by any warranty. Please use them with great caution.

Features

- 0.4 – 1.1 μm
- Low Noise
- High Sensitivity
- Hermetic Sealed Detector
- MEMS Chopper Integration Option

Applications

- OEM
- Lab user
- Instruments

Specifications

Parameter	Min	Typical	Max	Unit
Central Wavelength	300	960	1100	nm
Sensor Active Diameter	1x1	1.7x2.8, 5x5	5x5	mm
Responsivity (@960nm)	0.6	0.65		A/W
Dark Current (@0.1V, -40 °C)	<10		<25	nA
Noise Equivalent Power (@960nm,0V)	<8		<13	$10^{-15}\text{W}/\text{VHz}$
Shunt Resistance (@-10mV)	>5	>5	>10	Mohms
Cut Off Frequency (@1V)	80		20	MHz
Capacitance (@0V)		370 (1.7x2.8)	2100 (5x5)	pF
Reverse Voltage	0	-5		V
Operating Temperature	-40		75	°C
Storage Temperature	-50		85	°C
TEC Cooler Power		<2.1V@2A		W

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 11/27/25

[+1 781-935-1200](tel:+17819351200)

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


Mechanical Dimensions 3-Stage TEC Cooling (mm)



Pin #	Definition
1	Thermistor
2	Si Photodiode (+)
3	Si Photodiode (-)
4	Thermistor
5	TEC (-)
6	MEMS Shutter
7	MEMS Shutter
8	TEC (+)

Technical drawing of the detector assembly showing dimensions and labels:

- Top horizontal dimensions: 26.6 ± 0.2 and $0.4 \pm 0.3^{*2}$
- Left vertical dimension: $\phi 32 \pm 0.3$
- Right vertical dimension: $\phi 46$
- Inner vertical dimension: $\phi 26.0 \pm 0.2$
- Bottom horizontal dimensions: 3 ± 0.1 (two segments)
- Labels:
 - Photosensitive surface*³
 - Detector metal package

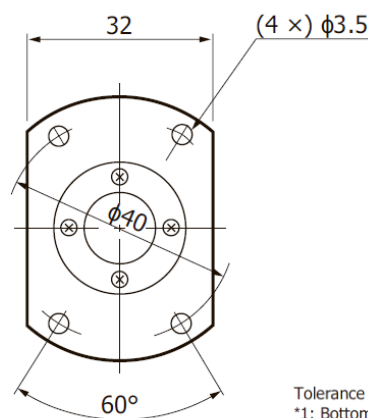

Weight: 50 g approx.

Tolerance unless otherwise noted: ± 0.3

- *1: Bottom surface (reference surface) of detector metal package
- *2: When detector is installed
- *3: The position of the photosensitive surface differs according to the detector used.

Refer to the dimensional outline for the detector.

W www.agiltron.com

2

Cooled Photodiode Si PIN

0.4 – 1.1 μm



DATASHEET

Ordering Information (Part Number)

	7	☐	☐	☐	☐	☐	☐
Prefix	Material Type	TEC Type	Integrated Chopper	Detector Size	Window	AR Coated	Driver
CPOD-	Silicon PIN = 7	1 stage -10°C = 1 2 stage -20°C = 2 3 stage -40°C = 3	Non = 1 Yes = 2	1mm = 1 1.7mm x 2.8mm = 2 5mm = 5	Sapphire = 2 Spectral Filter = S Quartz = 1	No = 0 Yes = 1	No = 00 Yes = 11

Application Notes

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.