

Broadband Low Noise RF Amplifier (LNA)

50kHz-20GHz, 28 dB gain



DATASHEET

[Return to the Webpage](#)



Features

- Frequency: 50kHz-20GHz
- Small Signal Gain: 28dB
- NF = 3dB
- Vout = 4.48Vpp

Applications

- 5G Communication
- Test Equipment
- Optical Modulator Driver
- Radar System



This LNA broadband Low Noise RF Amplifier provides output power up to 16 dBm with a gain of 28 dB across a frequency range of 50kHz to 20GHz. It features a noise figure (NF) of 3 dB within the 0.1-20GHz range. The amplifier operates on +12V DC at 160 mA and is equipped with a SMA Female connector.

Specifications

Parameter	Min	Typical	Max	Unit
Frequency Range	0.00005		20	GHz
Gain	26	28		dB
NF (0.1-20GHz)		3	5	dB
Input Power		-20	-10	dBm
P1dB		+15		dBm
Psat		+16		dBm
Drain Supply	+8V	+12	+15	V
Current		160		mA
Input Return Loss		-10		dB
Output Return Loss		-10		dB
Spec Temp		25		°C
Drain Supply		+18		V
RF Input Power		+15		dBm
Operating Temperature(note)	-40		+85	°C
Storage Temperature	-55		+125	°C
Input Port		SMA Female		
Output Port		SMA Female		
Case Material		Copper		
Finish		Gold Plated		
Weight (Without Heatsink)		80		g
Size		See outline		

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 05/06/26

[+1 781-935-1200](tel:+17819351200)

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Broadband Low Noise RF Amplifier (LNA)


50kHz-20GHz, 28 dB gain




DATASHEET

Test Data (25°C)

Gain vs Frequency 10MHz-20GHz

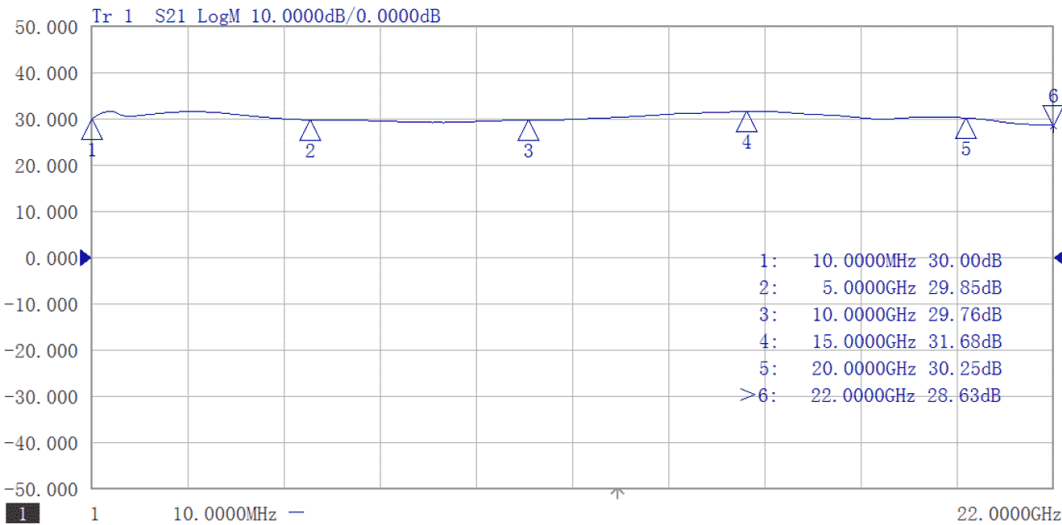

Gain vs Frequency 50kHz-1MHz

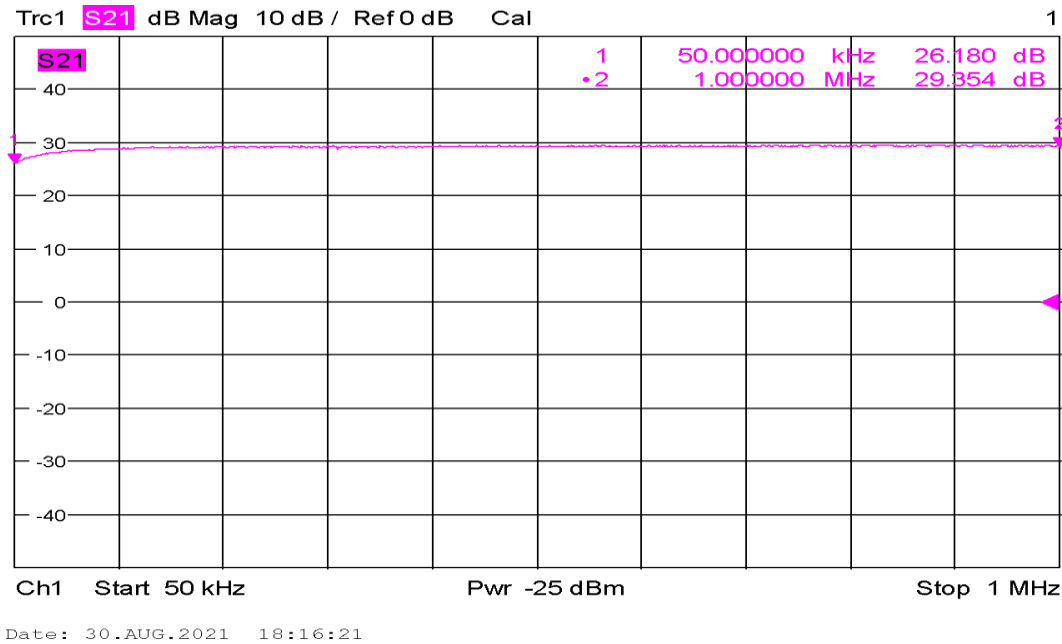


Broadband Low Noise RF Amplifier (LNA)

50kHz-20GHz, 28 dB gain




DATASHEET

Return Loss vs Frequency 10MHz-20GHz

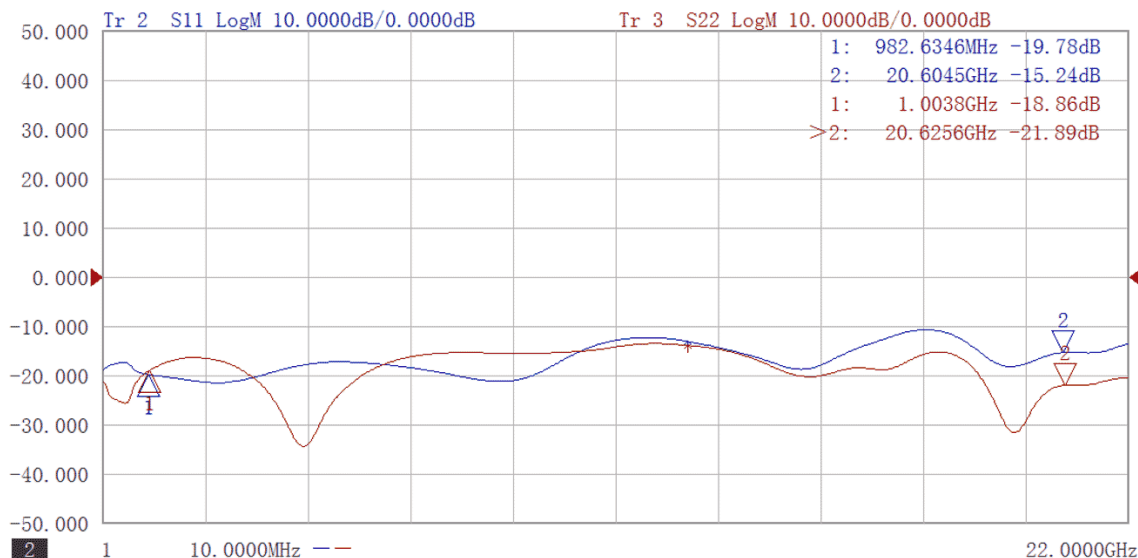

Return Loss vs Frequency 50kHz-1MHz

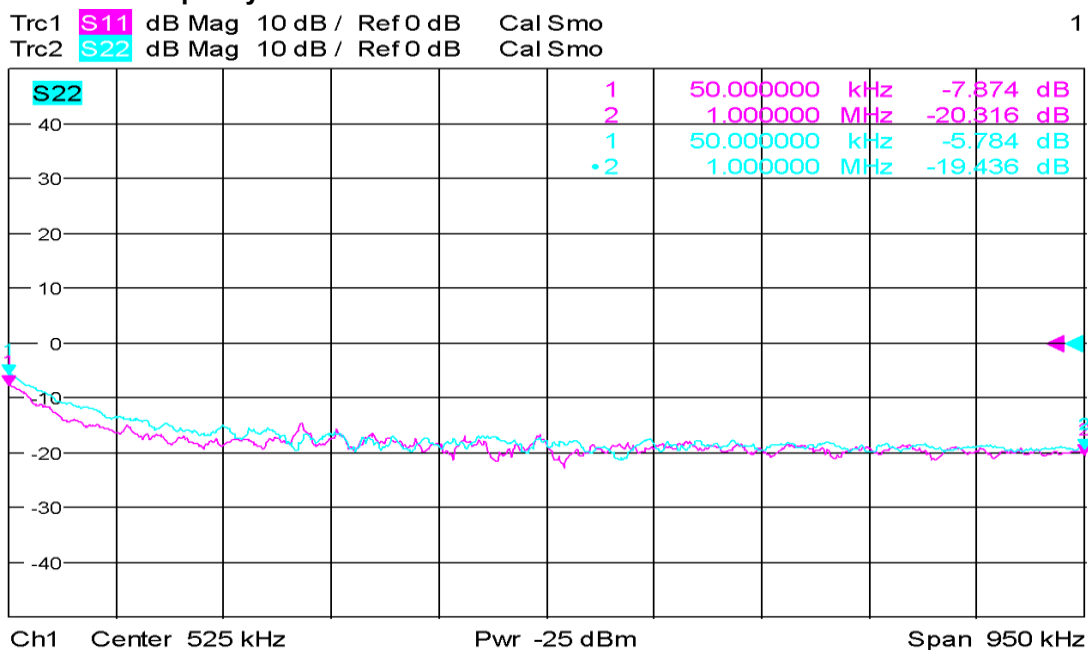

Date: 30.AUG.2021 18:32:06

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


Broadband Low Noise RF Amplifier (LNA)

50kHz-20GHz, 28 dB gain




DATASHEET

P1dB vs Frequency

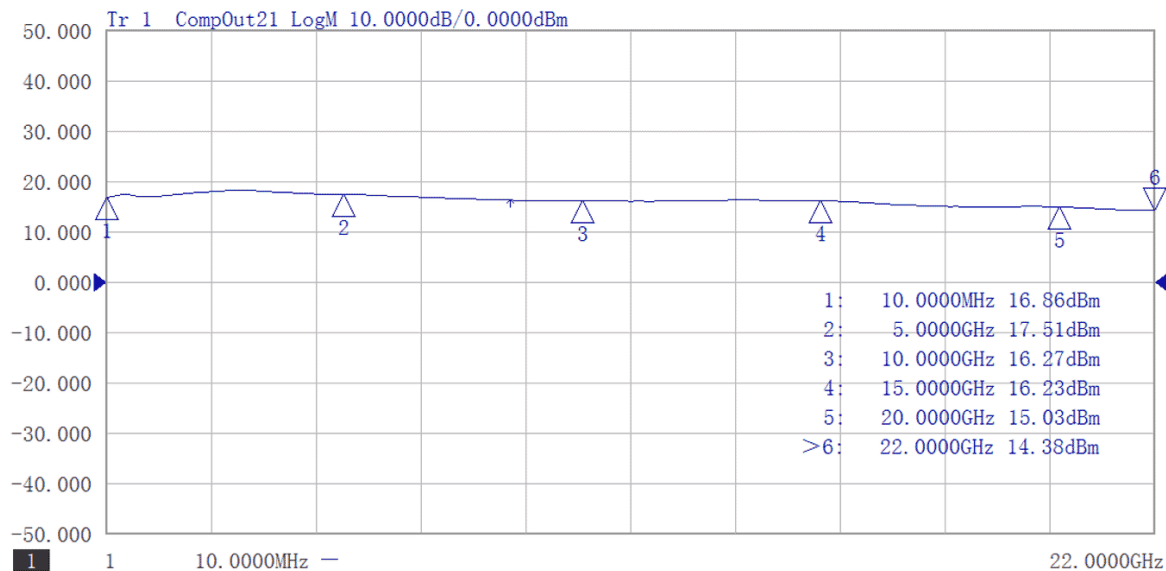

P3dB vs Frequency

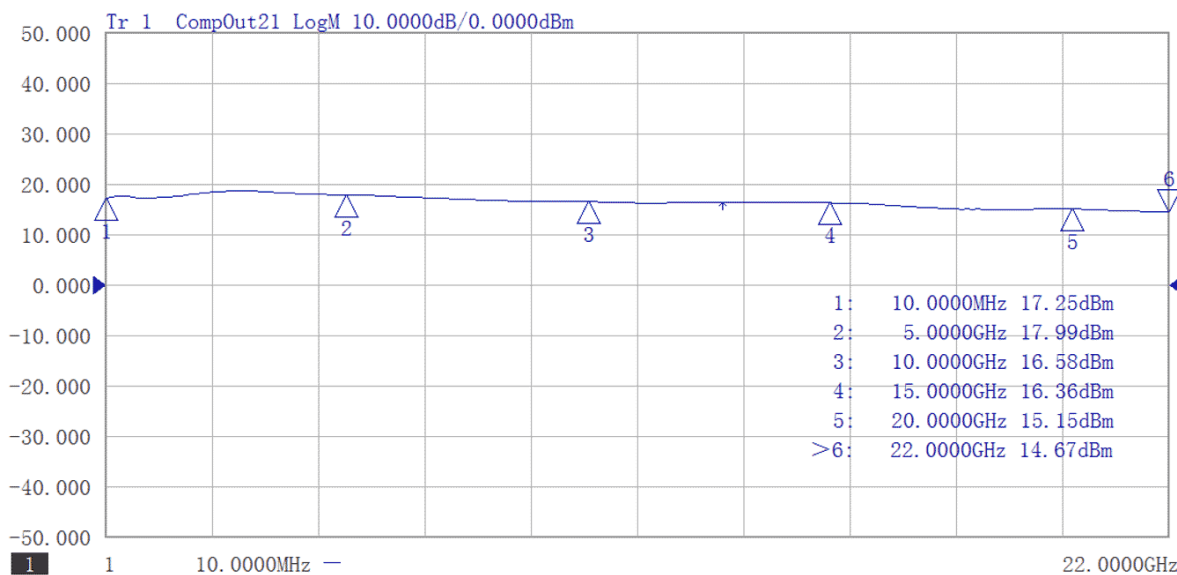

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


Broadband Low Noise RF Amplifier (LNA)

50kHz-20GHz, 28 dB gain




DATASHEET

Psat vs Frequency at Pin=-5dBm from 10MHz-20GHz

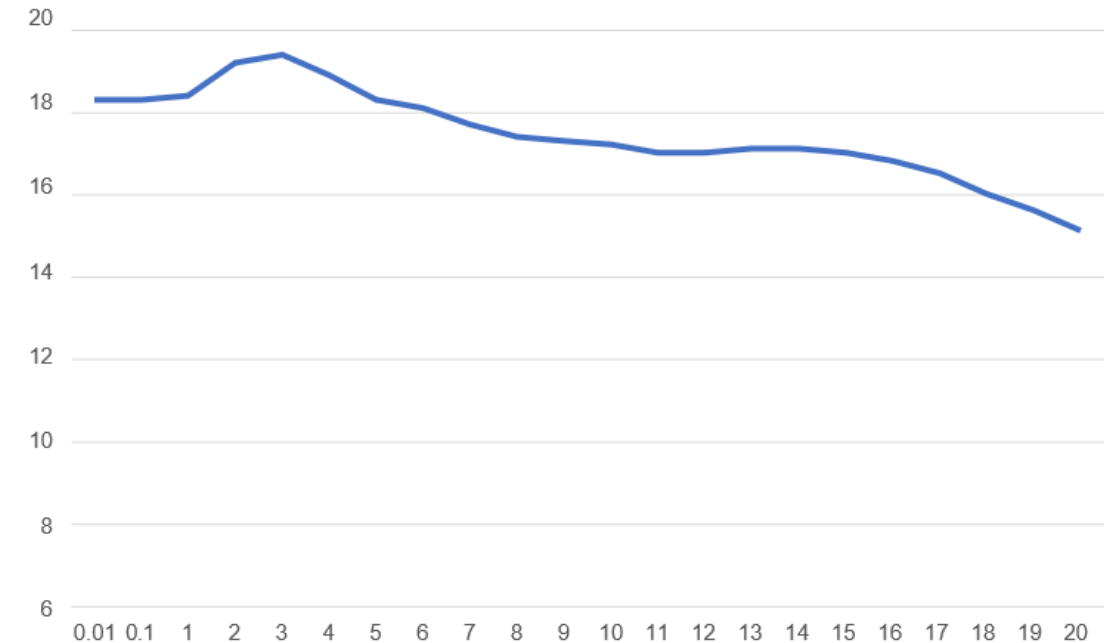

Phase delay vs Frequency

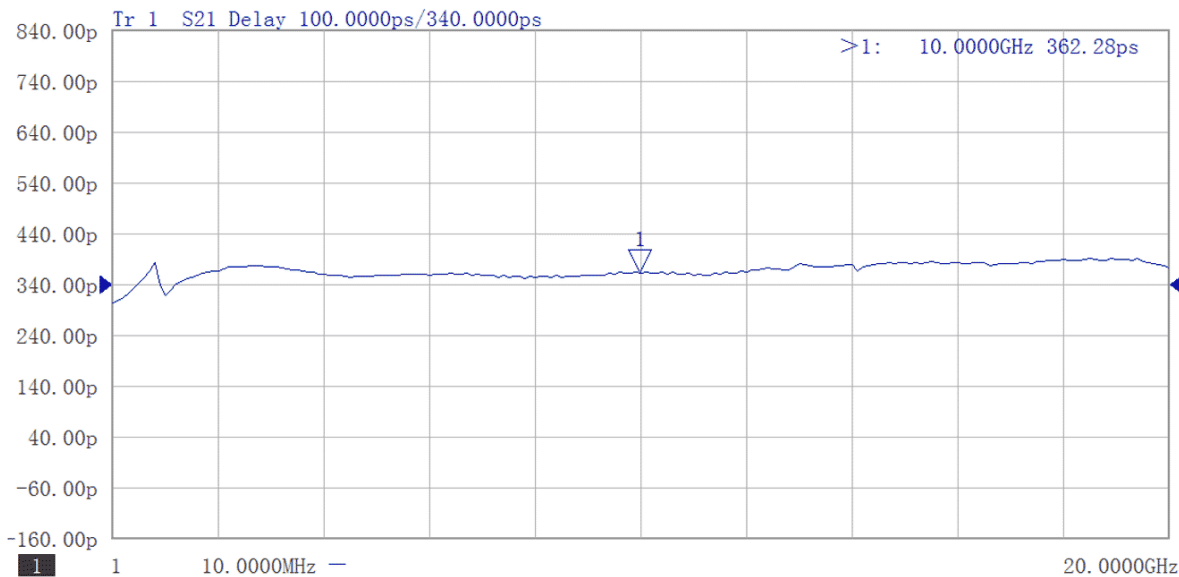

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


Broadband Low Noise RF Amplifier (LNA)

50kHz-20GHz, 28 dB gain



DATASHEET

NF test vs Frequency 10MHz-1GHz

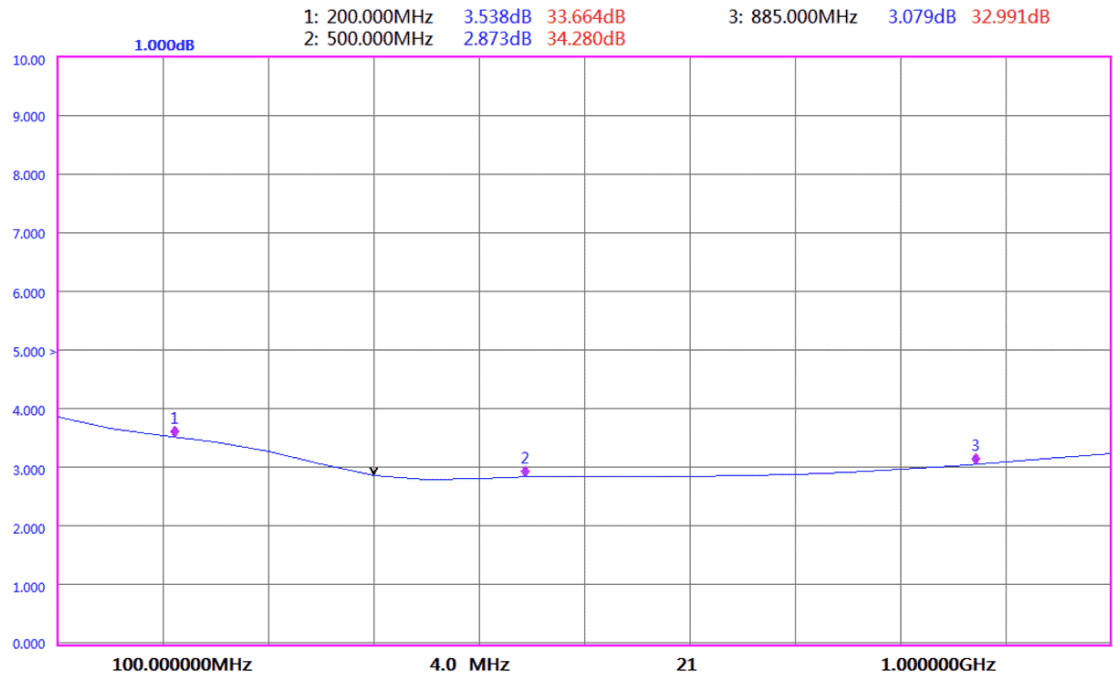

NF test vs Frequency 1-20GHz




Broadband Low Noise RF Amplifier (LNA)

50kHz-20GHz, 28 dB gain



 DATASHEET

Dimensions (mm)

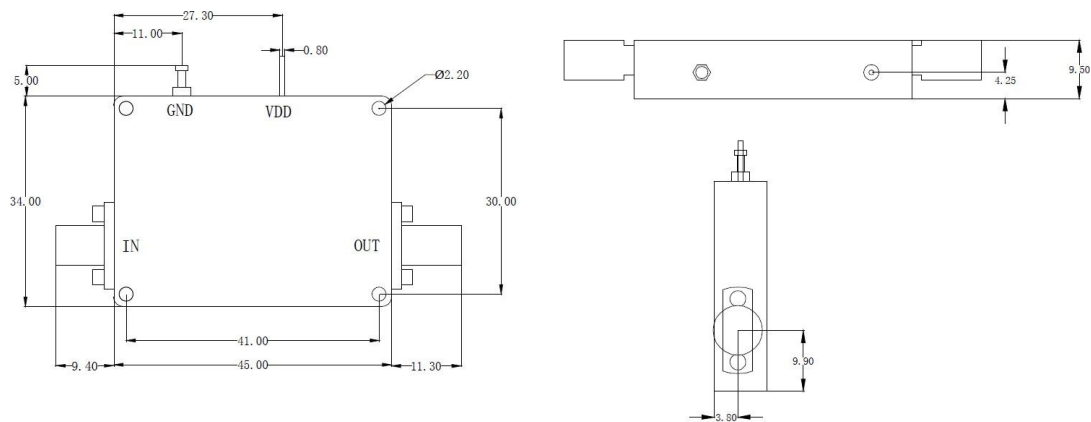


	<26.5GHz	<40GHz	<50GHz	<67GHz
Connector	SMA	2.92mm	2.4mm	1.85mm
Lenth of a	9.4mm	9.5mm	10.8mm	11.3mm

Note: Female Default. Contact with us for other types.

Standard module outline, Heat sink required if case temp exceeds 50°C

-LCBT Option Dimension (mm)

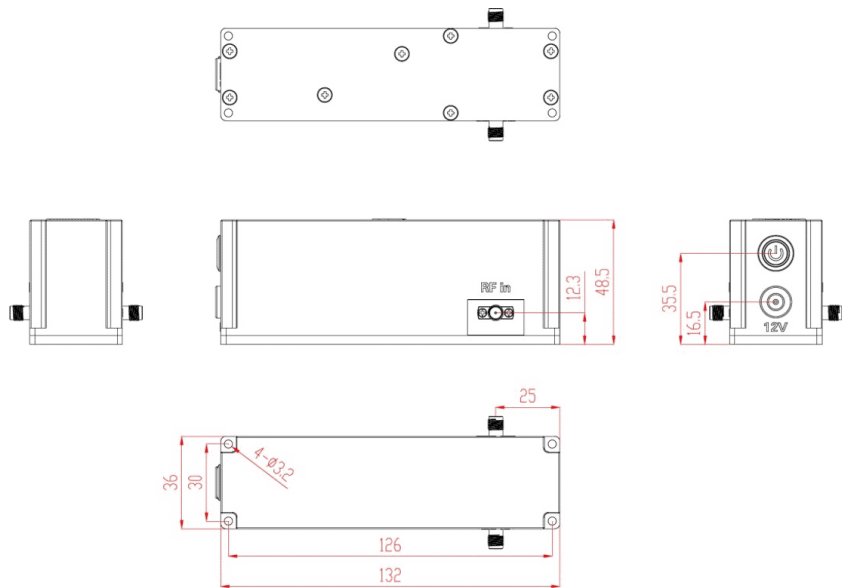

Module *

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Broadband Low Noise RF Amplifier (LNA)

50kHz-20GHz, 28 dB gain



 DATASHEET |

Ordering Information (Part Number)

	0005	20	28	3	15	☐
Prefix	Low Frequency	High Frequency	Gain	NF	P1dB	Module *
LNAM-	50kHz = 0005	20GHz = 20	28dB = 28	3dB = 3	15dBm = 15	No = 0 Yes = 1

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.