

Fiber Optic Michelson Interferometer - OCT

850, 1310nm, 20/100/300 MHz



DATASHEET

[Return to the Webpage](#)



Features

- Non-Mechanical High Reliability
- Accurate and Reproducible Position Control
- Fast Scan Speeds

Applications

- Laser Display
- Micromachining
- Laser Tweezers
- Optical Inspection
- Heterodyne Interferometer



Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Rev 04/23/26

The FMIM Series Fiber Optical Michelson Interferometer utilizes a fiber optic coupler to split incoming light into two optical paths, which are then recombined to generate an interference pattern for precise measurement applications. Engineered for a flat wavelength response and exceptionally low polarization-dependent coupling ratio change (PDCR), the FMIM delivers output signals that are virtually unaffected by input polarization variations. Optimized for both swept-source Fourier domain and time-domain OCT systems, it features dual optical outputs functioning as the reference and sample arms, with interference fringes captured by an integrated balanced detector. An optional aiming laser input is available to simplify sample alignment.

Specifications

Parameter		Min	Typical	Max	Unit
Wavelength Range		1250		1350	nm
		780		925	
Typical Max. Responsivity				1.0	A/W
Insertion Loss ^[1]	1300nm IN		< 4	5	
	850nm IN		< 5	6.5	dB
	660nm IN		< 3	4.5	
Path Length Difference			< 0.1	0.2	mm
Input Power		20 ^[2]		250	mW
OUTPUT Bandwidth (3dB)	model 20MHz		DC – 20		MHz
	model 100MHz		DC – 100		
Transimpedance Gain	model 20MHz		51*10 ³		V/A
	model 100MHz		100.000		
Saturation Power	model 20MHz		70		μW
	model 100MHz		35		
Electrical Outputs, Impedance			SMA, 50		Ω
DC-offset Electrical Outputs	model 20MHz		< ±5		mV
	model 100MHz		< ±10		
Power Supply			±12V, 250mA		

Notes:

[1]. Includes connector losses, measured at center wavelength

[2]. Referred to SAMPLE ARM and REFERENCE ARM port in this case

* All accuracy data are valid at 23 ± 5°C and 45 ± 15% humidity

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


Fiber Optic Michelson Interferometer - OCT

850, 1310nm, 20/100/300 MHz



DATASHEET

Mechanical Dimensions (mm)

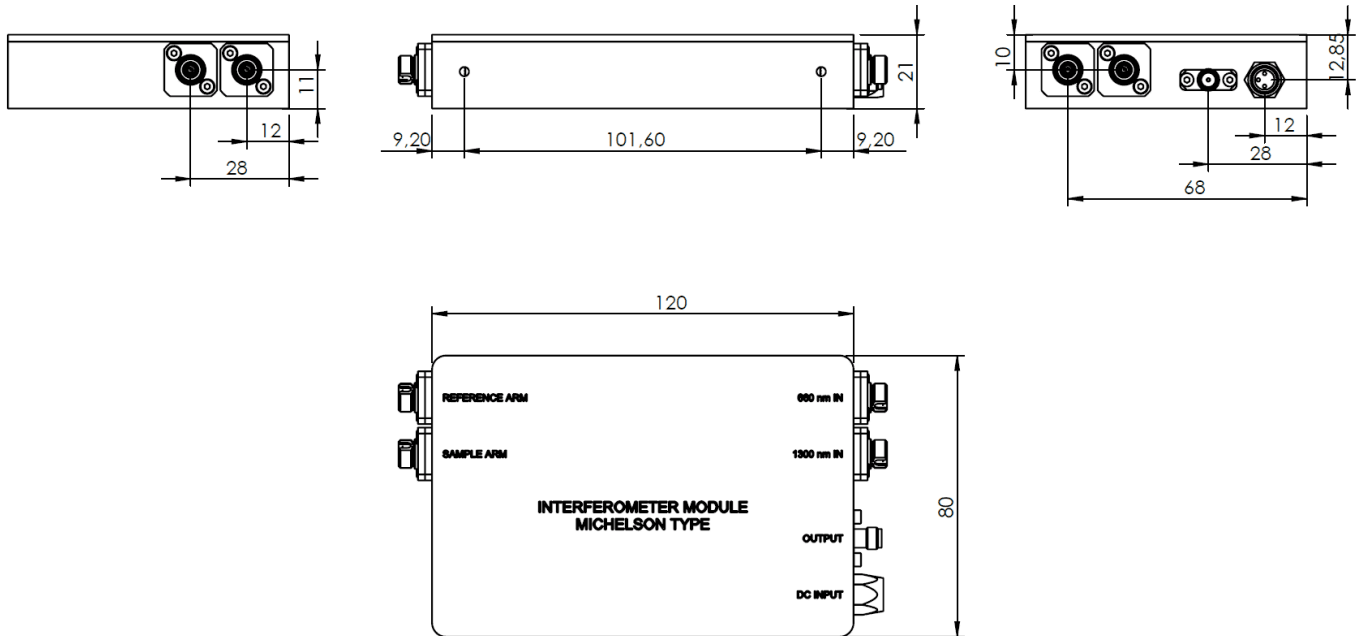

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


Fiber Optic Michelson Interferometer - OCT

850, 1310nm, 20/100/300 MHz



 DATASHEET

Functional Diagram

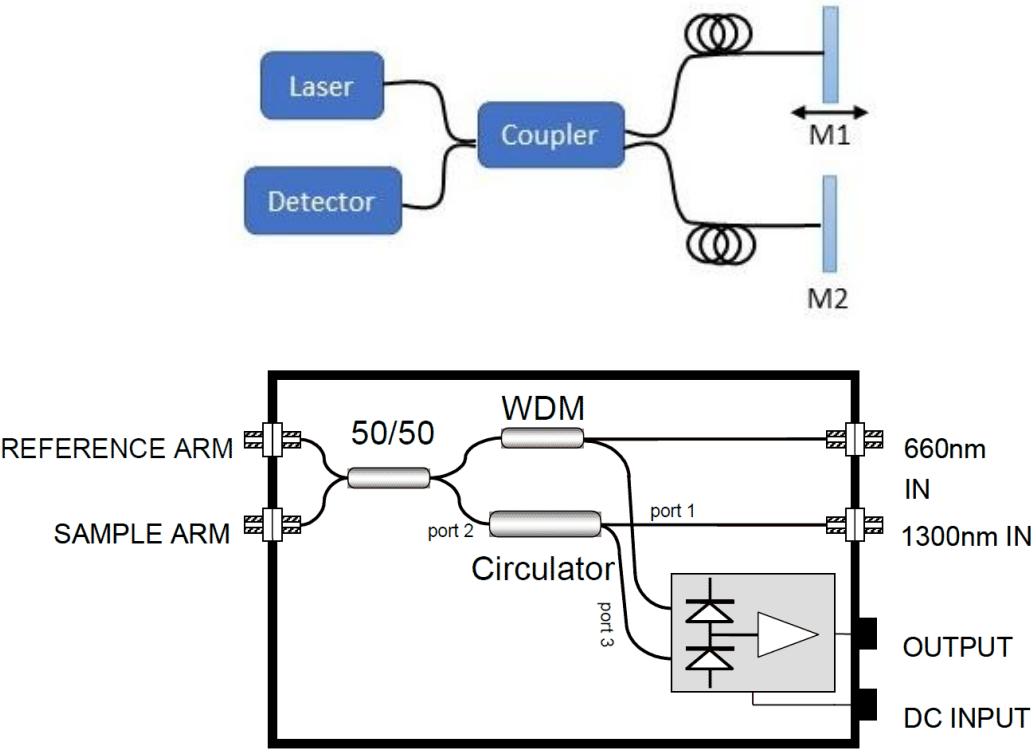

Ordering Information (Part Number)

	☐	☐	☐ ☐	☐	1	☐	☐
Prefix	Configuration	Wavelength	Detector Bandwidth	Fiber Type		Connector ^[1]	Aiming Laser
FMIM-	Standard = 1	1225-1375nm = 1 780-925nm = 2 1550nm = 5 Special = 0	No Detector = NN 20MHz = 02 100MHz = 10 200MHz = 20 300MHz = 30 400MHz = 40 Special = 00	SM28 = 1 780HP = 7 Special = 0		FC/APC = 1	Non = 1 Only Input Port = 2 Include laser = 3

[1]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.


Fiber Optic Michelson Interferometer - OCT

850, 1310nm, 20/100/300 MHz



DATASHEET |

Typical Response

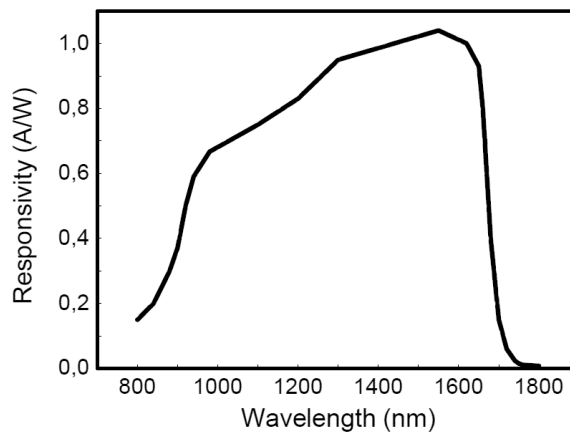

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.