

NanoSpeed™ Fiber In and Free-Space Out Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)



DATASHEET

[Return to the Webpage](#)



Features

- Solid-State
- High Speed
- High Reliability
- Low Loss
- Compact

Applications

- Sensor
- LiDar
- Instrumentation



The NanoSpeed™ Fiber In and Free-Space Out switches are fast laser beam shutter device featuring very low loss, fast response, and high optical power handling. The design uniquely provides a way to modulate/switch laser beam from a large core fiber. This is achieved using patented non-mechanical configurations with solid-state all-crystal designs, which eliminates the need for mechanical movement and organic materials. The NS fiber-optic switch is designed to meet the most demanding switching requirements of ultra-high reliability, fast response time, and continuous switching operation. The switch is bidirectional. The free space out put has a collimating lens, which can be customer designed. The switch is intrinsically bidirectional and selectable for polarization-independent or polarization-maintain by the fiber type.

The NS Series switch is controlled by 5V TTL signals with a specially designed electronic driver having performance optimized for various repetition rate.

The rise/fall time is intrinsically related to the crystal properties, and the repetition rate is associated with the driver. There are poor frequency response sections due to the device resonances. The NS devices are shipped mounted on a tuned driver.

The NS series switches respond to a control signal with any arbitrary timing with frequency from DC up to MHz. The switch is usually mounted on a tuned driver before shipping. The electrical power consumption is related to the repetition rate at which the switch is operated.

The dual-stage configuration increases the extinction ratio or cross-talk value.

Specifications

Parameter		Min	Typical	Max	Unit
Central Wavelength		450		2340	nm
Bandwidth (1550nm)			± 25		nm
Insertion Loss ^[1]			0.6	1.0	dB
Cross Talk On/Off Ratio ^[2]		15	25	35	dB
Durability		10 ¹⁴			cycles
PDL (SMF fiber only)			0.15	0.3	dB
ER (PMF fiber only)		18	25		dB
IL Temperature Dependency			0.25	0.5	dB
Return Loss		45	50	60	dB
Response Time (Rise, Fall)				300	ns
Driver Repeat Rate	100kHz driver	DC	100		kHz
Optic power Handling ^[3]	Normal power		0.3	20	W
	High power			5	W
Operating Temperature ^[4]		-5		45	°C
Storage Temperature		-40		85	°C

Notes:

- [1]. Measured without connectors. For other wavelength, please contact us.
- [2]. ±25nm, Measured at 5kHz, which may be degraded at higher repeat rate. Measured using a multimode laser with CPR ~14. Higher CPR lowers the on/off ratio
- [3]. Defined at 1310nm/1550nm. For the shorter wavelength, the handling power may be reduced, please contact us for more information.
- [4]. The switches can be operated in a wider temperature range from as -10 to 70°C, but some performances such as on/off ratio will be degraded.

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Warning: This is an OEM module designed for system integration. Do not touch the PCB by hand. The electrical static can kill the chips even without a power plug-in. Unpleasant electrical shock may also be felt. For laboratory use, please buy a Turnkey system.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 06/10/26

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

NanoSpeed™ Fiber In and Free-Space Out Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)




DATASHEET

Mechanical Dimensions (Unit: mm)

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Typical Bandwidth Measurement

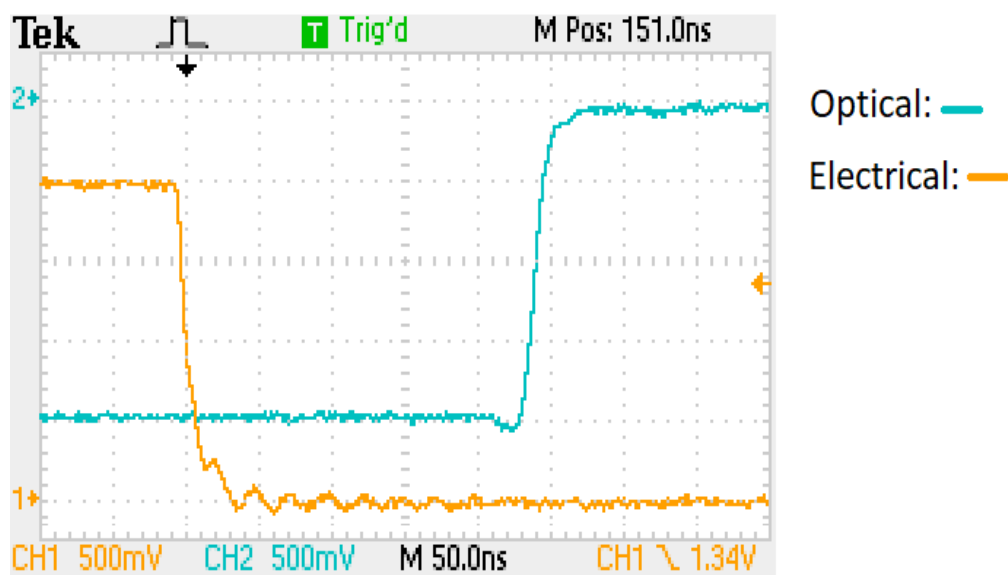

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

NanoSpeed™ Fiber In and Free-Space Out Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)



DATASHEET

Ordering Information (Part Number)

Prefix	Type	Wavelength ^[1]	Configuration ^[2]	Optical Power	Collimating Lens	Fiber Type	Fiber Cover	Fiber Length	Connector ^{[3][4]}	Benchtop
NSFF-	1x1 = 1 1x2 = 2	1060nm = 1 2000nm = 2 1310nm = 3 1410nm = 4 1550nm = 5 1625nm = 6 1750nm = A 850nm = 8 780nm = 7 650 = E 550 = F 400 = G Special = 0	Normally-On = 1 Normal-Off = 2	Standard = 1 5W = 5 10W = 6 20W = 7 30W = 8	Yes = 1 Special = 0	SMF-28 = 1 HI1060 = 2 HI780 = 3 PM1550 = 5 PM980 = 9 50/125 MMF ^[5] = 6 105/125 MMF = 7 200 = 8 Special = 0	Bare Fiber = 1 900um Tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 Duplex LC/PC = 8 LC/APC = 9 E2000 APC = A LC/UPC = U Special = 0	None = 1 Benchtop = B

[1]. The wavelength with red color can be implemented in the special version with a long lead-time

[2]. Normal off selection only for 1x1 switch

[3]. Please contact for high power connectors



[4]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

[5]. For laser with mode fill ratio CPR <14

Note:

- ☐ **PM1550** fiber works well for **1310nm**
- ☐ **Opaque** – light is blocked without applying a voltage
- ☐ **Transparent** – light goes through without applying a voltage

Benchtop Box Mechanical Dimension

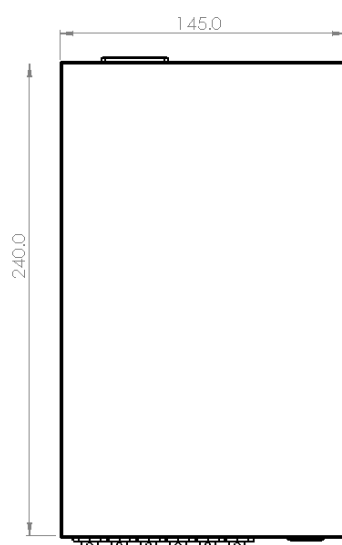

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


NanoSpeed™ Fiber In and Free-Space Out Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)




DATASHEET

Optical Power Handling vs Wavelength For Single-Mode Fibers

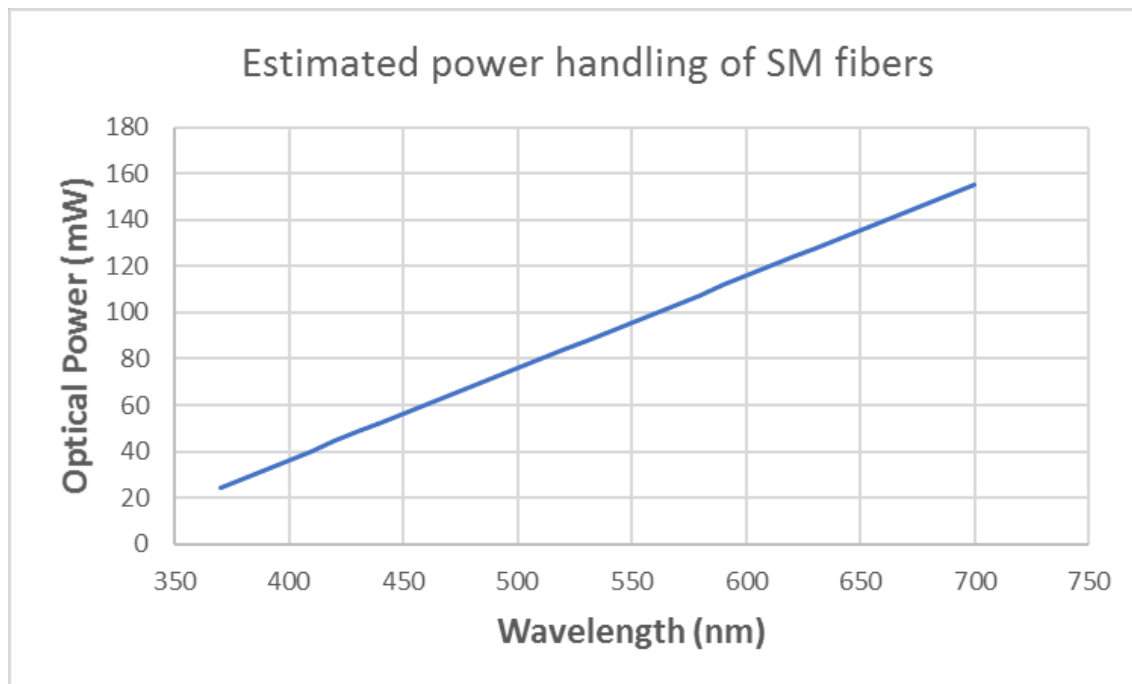

Typical Bandwidth

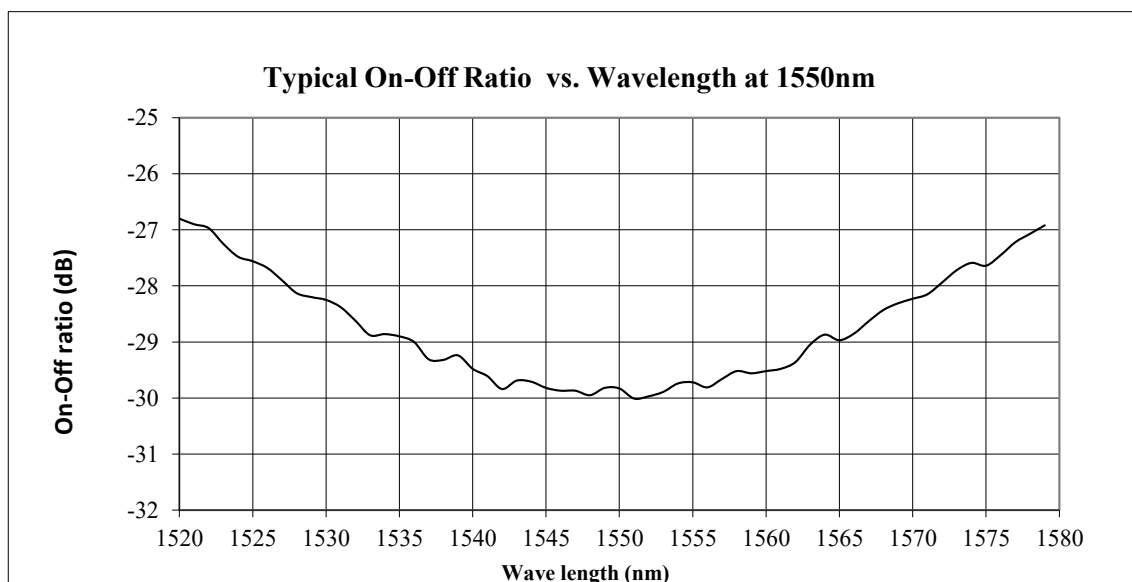

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

NanoSpeed™ Fiber In and Free-Space Out Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)



DATASHEET

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters ($<5\ \mu\text{m}$) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the handling by expanding the core side at the fiber ends.

Operation Manual

1. Connect a control signal to the SMA connector on the PCB.
2. Attach the accompanied power supply (typically a wall-pluggable unit).
3. The device should then function properly.

Note: Do not alter device factory settings.