

NanoSpeed™ Fiber Optical Phase Modulator/Switch

(Bidirectional, Polarization Insensitive, All Wavelengths)



DATASHEET

[Return to the Webpage](#)



Features

- High Reliability
- High Speed
- Low loss
- Compact

Applications

- Sensor
- Phase shift/delay
- Data process
- Instrumentation



Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 06/24/26

The NS Series fiber optical phase modulator/switch is a device based on a patented electro-optical configuration, featuring low optical loss and wide temperature operation with built-in compensation. The device is a bidirectional two-port equipment in which the input and output ports are interchangeable. The device dynamically controls the optical phase of the transmitting light, meeting the most demanding requirements of continuous operations over 25 years and non-mechanical ultra-high reliability (passed Telcordia and space qualifications). The switch is intrinsically bidirectional and selectable for polarization-independent or polarization-maintain by the fiber type.

For high-frequency resonance configuration, the device has an integrated circuit inside that only requires a 5V AC input signal matching the resonance frequency. For lower frequency, this device can be mounted on specially designed electronic drivers of both analog and digital switching drivers using a 5V analog or TTL control signal and a 12V power supply (wall pluggable), respectively.

The rise/fall time is intrinsically related to the crystal properties, and the repetition rate is associated with the driver. There are poor frequency response sections due to the device resonances. The NS devices are shipped mounted on a tuned driver.

The NS series switches respond to a control signal at any arbitrary time, with a frequency from DC up to MHz. The switch is usually mounted on a tuned driver before shipping. The electrical power consumption is related to the repetition rate at which the switch is operated.

The piezoelectric device's response is not linear and not repeatable. It is typically used for broad scanning or using a feedback controller for precision.

Specifications

Parameter		Min	Typical	Max	Unit
Insertion Loss ^[1]	1900-2200nm		0.8	1.8	dB
	1260~1650nm		0.6	1.0	dB
	960~1100nm		0.8	1.3	dB
	780-960nm		1.2	1.5	dB
	520 – 680nm		1.5	2.3	dB
IL Temperature Dependency		60	0.25	0.5	dB
Durability		10 ¹⁴			cycles
Polarization Dependent Loss (SM version)			0.15	0.3	dB
Polarization Mode Dispersion (SM version)			0.1	0.3	ps
Polarization extinction ratio (PM version)		18			dB
Return Loss		45	50		dB
Phase Change ^[2]		0	180	360	Degree
Analog Modulation rate		DC	50	200	kHz
Digital Switching Rate ^[3]		10	20	100	MHz
Resonance Modulation Rate					
Optic power	Normal power version		300		mW
Handling ^[4]	High power version			5	W
Operating Temperature	Standard	-5		75	°C
	Special version	-30		85	°C
Storage Temperature		-40		100	°C

Notes:

- [1] Measured without connectors. Wavelength with red color can be implemented in the special version with a long lead time.
- [2] The phase change is proportionally to the 0-5V control signal with NVDR driver. Regular is 180 degree, 360 degree is special order.
- [3] Fixed at a predetermined phase change degree.
- [4] For 1310nm/1550nm. For the shorter wavelength, the handling power is significantly reduced. High power version should be ordered to increase the damage threshold.

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


NanoSpeed™ Fiber Optical Phase Modulator/Switch

(Bidirectional, Polarization Insensitive, All Wavelengths)




DATASHEET

Mechanical Dimensions (Unit: mm) 850-2300nm, DC-200kHz

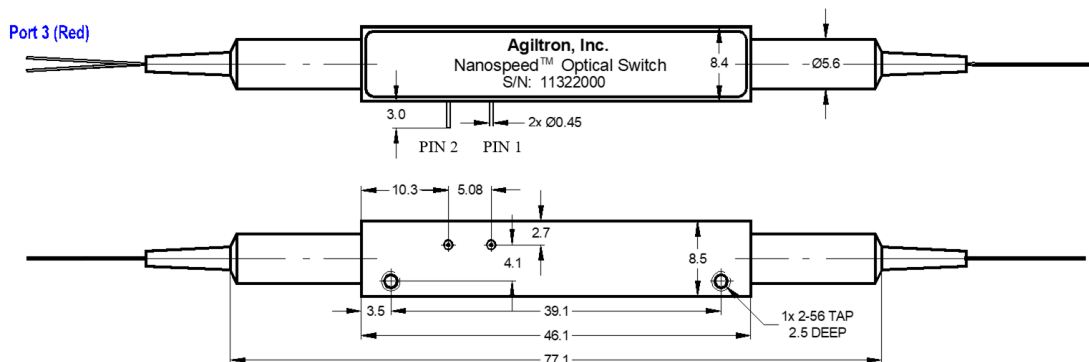

Mechanical Dimensions (Unit: mm) 550-2300nm, DC-800kHz

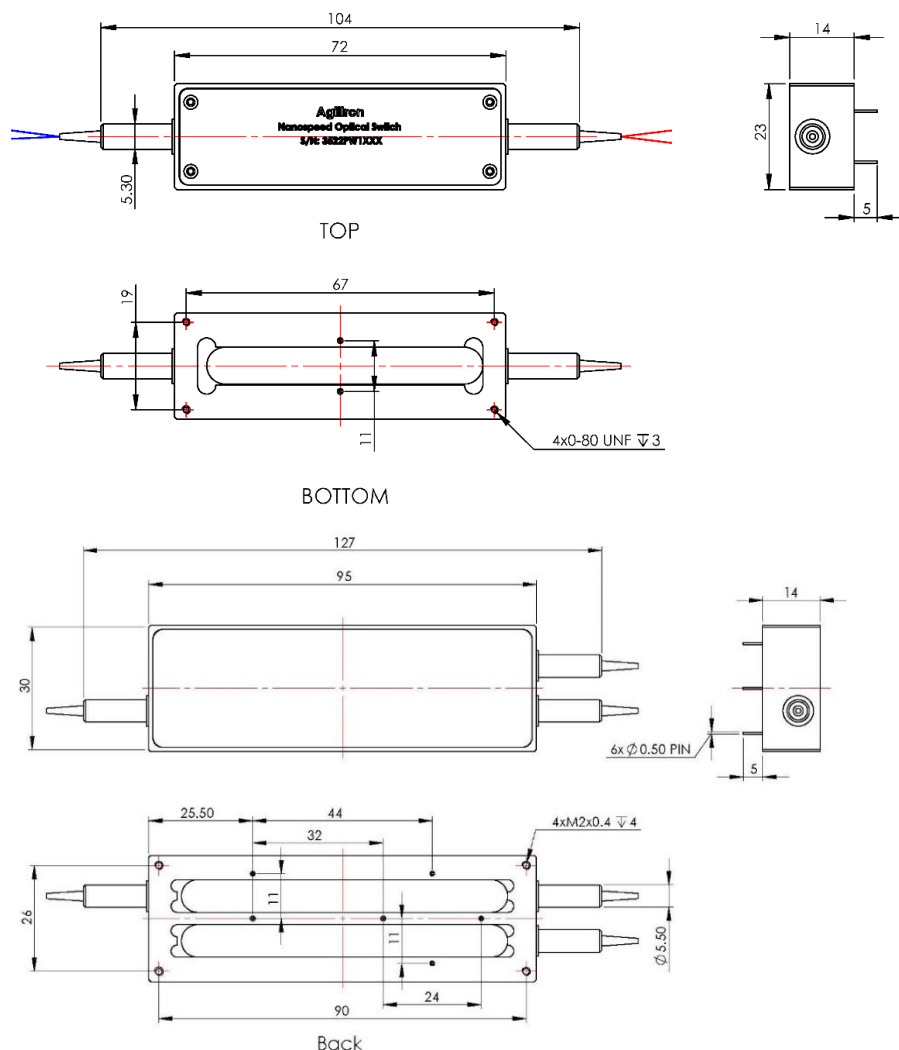

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

NanoSpeed™ Fiber Optical Phase Modulator/Switch

(Bidirectional, Polarization Insensitive, All Wavelengths)



DATASHEET

Analog Driving Board Selection

Maximum Repetition Rate	Part Number (P/N)
100kHz (dual stage)	NVDR-SP2210121
200kHz (single stage)	NVDR-SP2210121
800kHz (single stage)	NVDR-SPH210121


Digital Driving Board Selection

	☐	☐	☐	☐	☐	1	1
Prefix	Switch Type	Configuration ^[1]	Repeat Rate	Switch QTY	Channel # ^[3]	Control Mode	Power Supply
NSDR-	single stage = 1P dual stage ^[2] = 2P	1x1 = 1a 1x2, 2x1 = 2a 1x4, 4x1 = 4a ... 1xN, Nx1 = Na Special=00	200kHz = M 500kHz/50ns = P ^[3] 1MHz/50ns = H ^[3] 1MHz/10ns = F ^[3] Special = 0	Single = 1 Multiple = G	Single Channel = 1 N parallel channel = N Special = 0	TTL=1	12VDC =1 Special =0

Resonance Driving Board (inside the device)

The resonant modulator can be driven by a function generator tuned to the device's resonant frequency.

Optical Power Handling vs Wavelength For Single-Mode Fibers

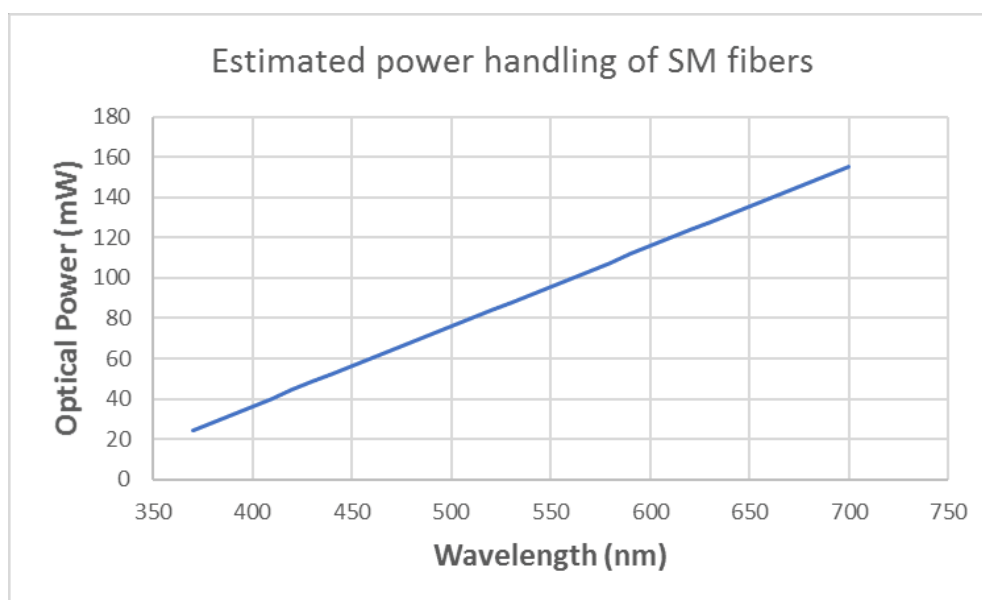

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

NanoSpeed™ Fiber Optical Phase Modulator/Switch



(Bidirectional, Polarization Insensitive, All Wavelengths)

DATASHEET

Ordering Information (Part Number)

Prefix	Type	Wavelength	Phase Change	Repetition Rate	Fiber Type	Fiber Cover	Fiber Length	Connector ^[2]	Benchtop ^[1]
NSPM-	Standard = 1 High Power ^[1] = 2	1060 = 1 2000 ^[1] = 2 1310 = 3 1550 = 5 1625 = 6 850 = 8 780 = 7 650 = E 550 = F Special = 0	180 = 1 360 = 2	Digital 100kHz = 1 Digital 200kHz = 2 Digital 800kHz = 3 Analog 100kHz = A Analog 200kHz = B Analog 800kHz = C Resonance 5MHz = D Resonance 10MHz = E Resonance 20MHz = F Resonance 50MHz = G Resonance 80MHz = H Special = 0	SMF-28 = 1 HI1060 = 2 HI780 = 3 PM1550 = 5 PM980 = 9 Special = 0	0.9mm tube = 3 Special = 0	0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 LC/PC = 7 E2000 PC = 8 E2000 APC = 9 Special = 0	Non = 1 Yes = 2

[1]. The benchtop integrates the modulator, driver, and power supply. Front Panel: SMA 0-5V electrical control input port for precise modulation. Fiber input and output ports with standard FC/APC connectors. Back Panel: 100-240 VAC power input for global compatibility and a Power switch for easy on/off control.



This all-in-one design simplifies setup and operation

[2]. The connector cannot be installed directly onto bare fiber, as it is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer can remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SM28 fiber and decreases further with smaller core fibers.

Note:

- PM1550 fiber works well for 1310nm

Benchtop Box Mechanical Dimension

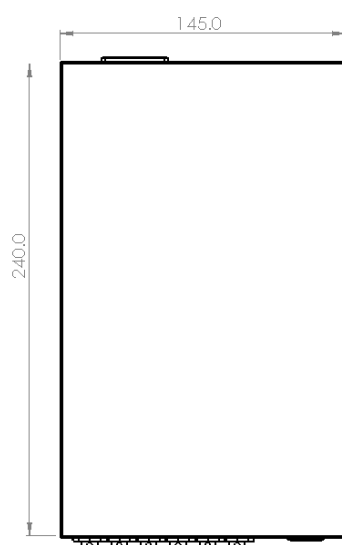

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

☎ +1 781-935-1200

✉ sales@agiltron.com

🌐 www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

NanoSpeed™ Fiber Optical Phase Modulator/Switch

(Bidirectional, Polarization Insensitive, All Wavelengths)



DATASHEET

Q & A

Q: Does NS device drift over time and temperature?

A: NS devices are based on electro-optical crystal materials that can be influenced to a certain range by the environmental variations. The insertion loss of the device is only affected by the thermal expansion induced miss-alignment. For extended temperature operation, we offer special packaging to -40 -100 °C. The extinction or cross-talk value is affected by many EO material characters, including temperature-dependent birefringence, V_p , temperature gradient, optical power, at resonance points (electronic). However, the devices are designed to meet the minimum extinction/cross-talk stated on the spec sheets. It is important to avoid a temperature gradient along the device length.

Q: What is the actual applying voltage on the device?

A: 100 to 400V depending on the version.

Q: How does the device work?

A: NS devices are not based on Mach-Zander Interference, rather birefringence crystal's nature beam displacement, in which the crystal creates two different paths for beams with different polarization orientations.

Q: What is the limitation for faster operation?

A: NS devices have been tested to have an optical response of about 300 ps. However, practical implementation limits the response speeds. It is possible to achieve a much faster response when operated at partial extinction value. We also offer resonance devices over 20MHz with low electrical power consumption.

Q: I assume that "Analog" means we provide a continuously varying voltage to the input port, proportional to the desired phase shift. Does "Digital" mean that a protocol is used to transmit the desired phase shift, something like a command string containing a designed phase shift value encoded in binary or ASCII? Or does it mean that there are only two voltage levels (essentially TTL) and the EOM switches between two phase shifts only?

A: It changes between two values, no voltage and V_{pi} . Analog or digital response

Q: How many EOMs can be installed in a benchtop box?

A: Up to 2

Q: What is V_{pi} for the EOM (or driver if paired with the EOM)?

A: Depend on specific, 200-450V

Operation Manual

1. Connect a control signal to the SMA connector on the PCB.
2. Attach the accompanied power supply (typically a wall-pluggable unit).
3. The device should then function properly.

Note: Do not alter device factory settings.

P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

NanoSpeed™ Fiber Optical Phase Modulator/Switch

(Bidirectional, Polarization Insensitive, All Wavelengths)



DATASHEET

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters ($<5\ \mu\text{m}$) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.