

Polarization Beam Combiner/Splitter

(550 to 2200nm, optical power up to 20W)



DATASHEET

[Return to the Webpage](#)



Features

- Low Insertion Loss
- Epoxy –Free Optical Path
- High Extinction Ratio
- Compact Package
- High Reliability & Stability
- Cost Effective

Applications

- Optical Fiber Amplifier
- Fiber Optic Sensor
- Instrumentation

Agiltron's PB Series Polarization Beam Combiners/Splitters are passive optical devices designed to combine two polarized optical signals into a single output or to split one optical signal into two polarized outputs. The products are available in fused fiber and micro-optic platforms; the fused versions offer low insertion loss, compact size, high power handling, and a typical polarization extinction ratio of about 22 dB, while the micro-optic versions provide higher extinction ratios up to 29 dB, broader wavelength coverage, improved temperature stability, and compatibility with a wide range of fiber types, including hollow-core photonic fibers..

Specifications

Parameter		Min	Typical	Max	Unit
Wavelength		780		2300	nm
Wavelength Range ^[1]	Micro-optic		120		nm
	Fused		80		
Insertion Loss ^[2]	1900 – 2300nm		0.8	1.2	
Insertion Loss ^[2]	1700 – 1900nm		0.7	1.1	
Insertion Loss ^[2]	1260 – 1650nm		0.6	1	
Insertion Loss ^[2]	960 – 1100nm		1	1.2	
Insertion Loss ^[2]	780 – 950nm		1.2	1.5	
Extinction Ratio ^[2]		20	22	29	dB
Return Loss		45	50	60	dB
Wavelength Dependent Loss				0.15	dB
Optical Power Handling ^[3]			0.3	10	W
Directivity (2→3 or 3→2)		50			dB
Operating Temperature		-10		50	°C
Storage Temperature		-40		80	°C

Notes:

[1]. at 1550nm.

[2]. Measured without connectors. Each connector adds about 0.25dB loss

[3]. Defined at 1310nm/1550nm. For the shorter wavelength, the handling power may be reduced.

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 02/04/26

[+1 781-935-1200](tel:+17819351200)

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Polarization Beam Combiner/Splitter


(550 to 2200nm, optical power up to 20W)




DATASHEET

Mechanical Dimensions Standard (mm)

Micro-optic PER~29dB

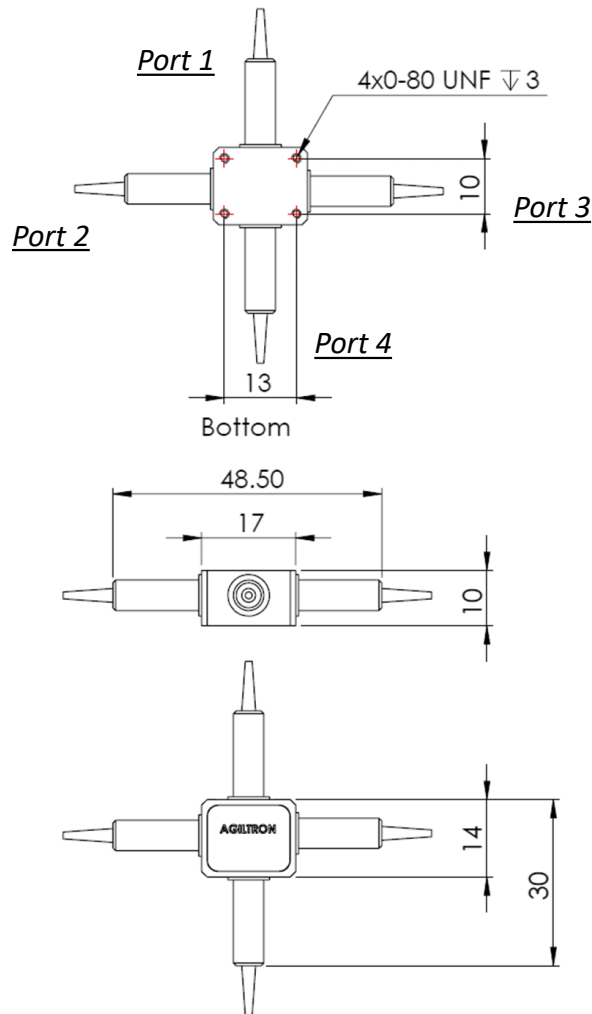

Fused PER~22dB

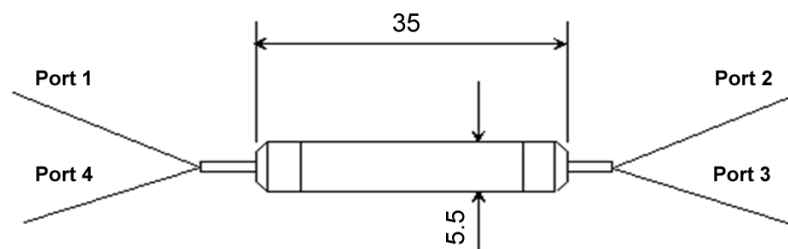

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

Polarization Beam Combiner/Splitter

(550 to 2200nm, optical power up to 20W)



DATASHEET

Ordering Information (Part Number)

Prefix	Power	Wavelength	PER ^[1]	Port 1 Fiber Type	Ports 2 Fiber Type	Ports 3 Fiber Type	Ports 4 Fiber Type	Fiber Cover	Fiber Length	Connector ^{[2][3]}
PBCS-	Regular = 1 1W = A 2W = B 5W = C 8W = D 10W = E 15W = F 20W = G Special = 0	1060 = 1 1310 = 3 1480 = 4 1550 = 5 780 = 7 850 = 8 980 = 9 650 = 6 550 = A 490 = B 350 = C 1750-2050=R Special = 0	22dB Fused = 1 26dB Micro = 2 29dB = 3 Special = 0	SMF-28 = 1 HI 1060 = 9 Special = 0	PM1550 = 2 PM1310 = 3 PM1950 = 5 PM980 = 6 PM850 = 7 PM400 = 8 HI 1060 = 9 Special = 0	PM1550 = 2 PM1310 = 3 PM1950 = 5 PM980 = 6 PM850 = 7 PM400 = 8 HI 1060 = 9 Special = 0	None = N SMF-28 = 1 PM1550 = 2 PM1310 = 3 PM1950 = 5 PM980 = 6 PM850 = 7 PM400 = 8 HI 1060 = 9 Special = 0	Bare fiber = 1 900um tube= 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 HERFC/PC = E HERFC/APC = F Special = 0

[1]. For 26 and 29dB, micro-optic package is used. Measured without connectors. Each connector adds about 0.25dB loss. Connector reduces ER

[2]. Connector will reduce PER.

Regular connectors FC/PC and FC/APC have PER~20. HERFC/PC and HERFC/APC have PER~29. They must be used in pair and **\$490** ea.

[3]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5

W for SMF-28 fiber and decreases further for smaller-core fibers.

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 µm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.