
Stabilized DFB laser modules

Distributed-feedback laser modules with optical isolation, power control and temperature control.

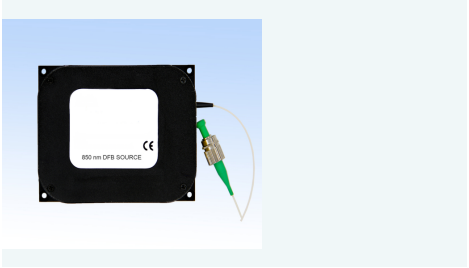

Representative series photograph. Packaging depends on configuration.

Technical specifications

Wavelength options	780, 850, 905, 1064, 1310, 1550 nm
Linewidth	<2 MHz; configuration dependent
Optical power	>10 mW; configuration dependent
Monitoring and control	Monitor photodiode, ATC and APC

Applications

Cold-atom experiments / Fiber communication / Fiber sensing

Selecting your configuration

Confirm wavelength availability, linewidth, output power and polarization for one selected build. The wavelength list does not imply equal performance at every wavelength.

Series options are not guaranteed combinations. Precisometer confirms the specifications, interfaces and availability of your selected configuration in a quotation.

Product page and enquiry | info@precisometer.com