

Fiber Optical Variable Reflector

100-0% (780-2200, 500mW)



DATASHEET

BUY NOW



Features

- High Repeatability
- Low Power
- Small

The VRFL Series of Fiber Optical Variable Reflector is a single fiber device that reflection the input light backward with variable ratio between 100-0% by applying a control voltage. It is constructed using an electrostatic rotating mirror hermetically sealed with nitrogen, featuring high repeatability, low power consumption, and low cost. A voltage between 0-9V on the drive pin sets the optical attenuation. When power is removed, the VRFL returns to its default 100% reflection state. The device's electrical character is capacitive without polarity. It can be mounted directly on printed circuit boards. The component is compliant with RoHS requirements and Telcordia standards GR1221 qualified.

Agiltron provides customized designs and modular assemblies to meet control and integration applications.

Specifications

Parameter		Min	Typical	Max	Unit
Operation Wavelength	Single Mode	780		2200	nm
	Multimode	810-890	1260-1360	1500-1600	
Loss at 100% Reflection ^{[1], [2]}			0.5	1.0	dB
PDL (SM)				0.3	dB
Repeatability (0-30, @15dB)			0.1	0.2	dB
Wavelength Dependent Loss (@20dB)				0.63	dB
Extinction Ratio (PM fiber)		18		30 ^[3]	dB
Repeatability (@10dB, 0-60 °C)			0.1	0.3	dB
Return Loss	SM, PM	50			dB
	MM	35			
Loss at 0% Reflection	SM, PM	40			dB
	MM	30			
Driving Voltage	SM, PM	0	6	10	V
	MM	0	9	10	
Response Time			0.5	5	ms
Repetition Rate			50	100	Hz
Durability			10 ¹²		Cycle
Power Consumption				20	μW
Power Consumption (at maximum)				0.2	mW
ESD				500	V
Operating Temperature ^[4]		-10		70	°C
Storage Temperature		-40		85	°C
Optical Power Handling			300	500	mW

Notes:

- [1]. Excluding connectors. Each connector adds 0.3dB @1550nm. Wavelength shorter and longer will increase loss.
- [2]. Multimode IL measured @ Light Source CPR < 14dB
- [3]. 30dB PER is available with special order
- [4]. Lower temperature version is available, please call us

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 08/28/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


Fiber Optical Variable Reflector



100-0% (780-2200, 500mW)

DATASHEET

Mechanical Dimensions (mm)

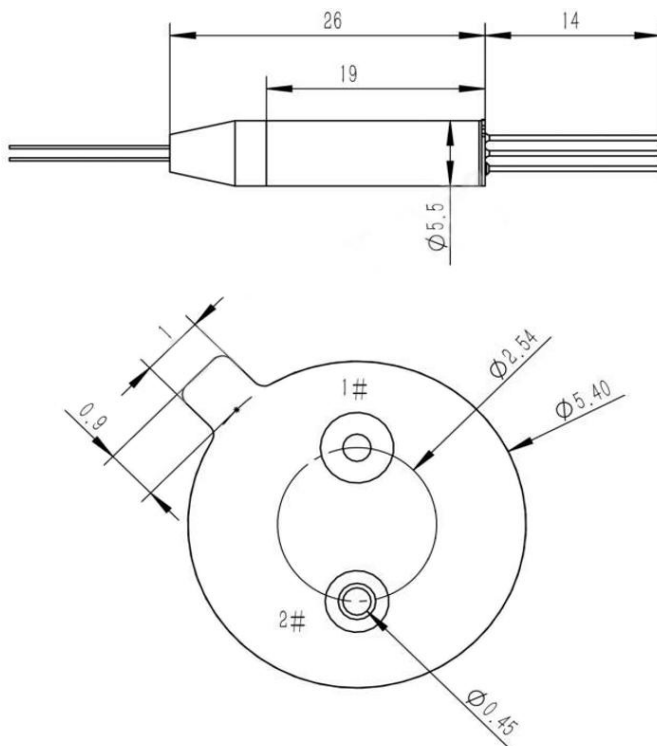

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Electrical Driving Requirements

- 1) Capacitive load device, no polarity. Applying a voltage between Pin1 and Pin2
- 2) The maximum rating voltage is 12V
- 3) The ground pin is optional and can be cut off


Fiber Optical Variable Reflector




100-0% (780-2200, 500mW)

DATASHEET

Typical Reflection vs. Voltage at 25°C, 55°C, 70°C

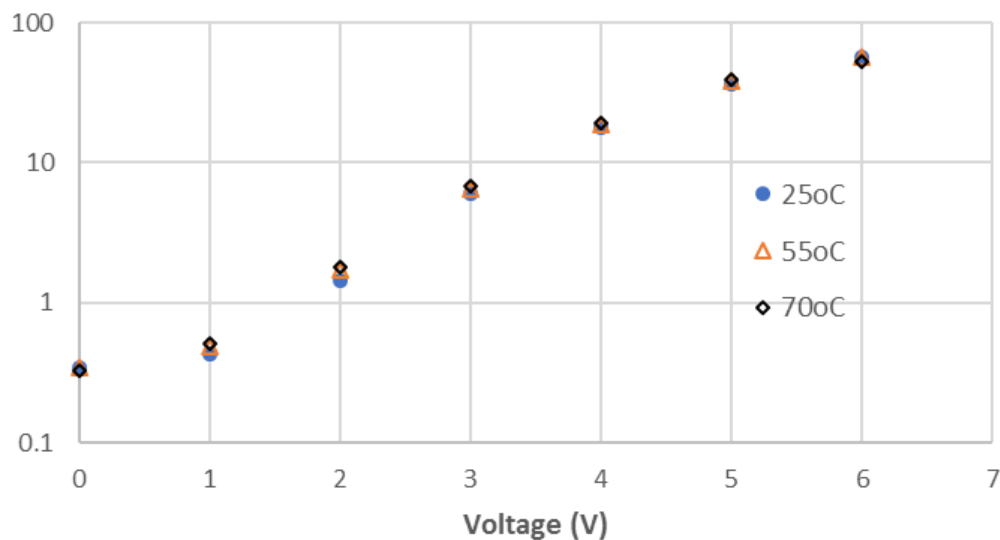

Typical Insertion Loss vs Wavelength (1240-1630nm)

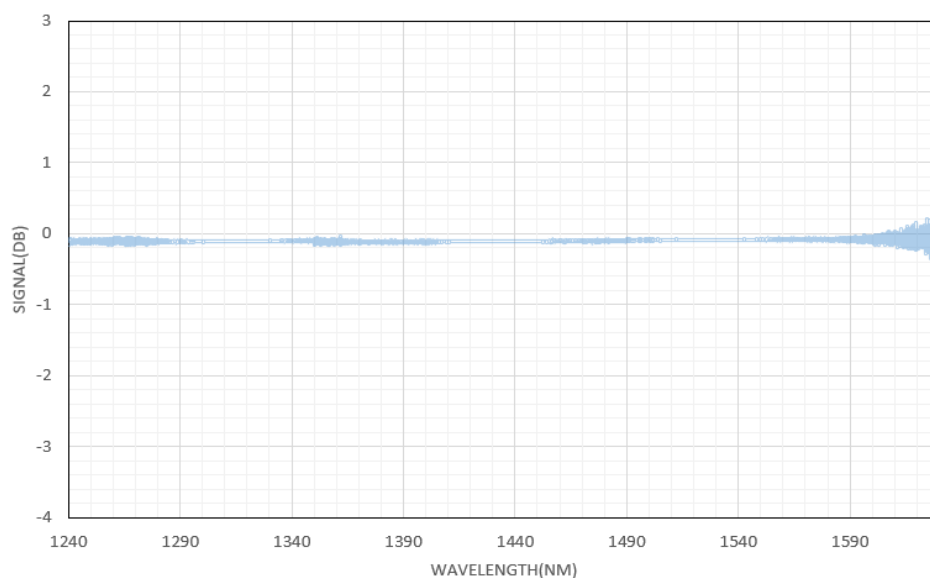


Fiber Optical Variable Reflector




100-0% (780-2200, 500mW)

DATASHEET

Wavelength Dependence at 12% Reflection

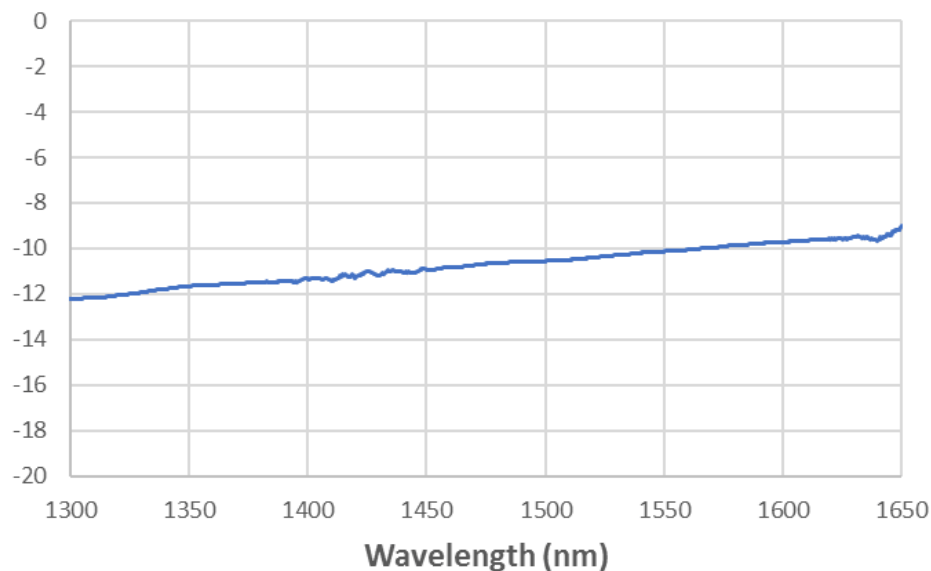

Wavelength Dependence at 70% Reflection

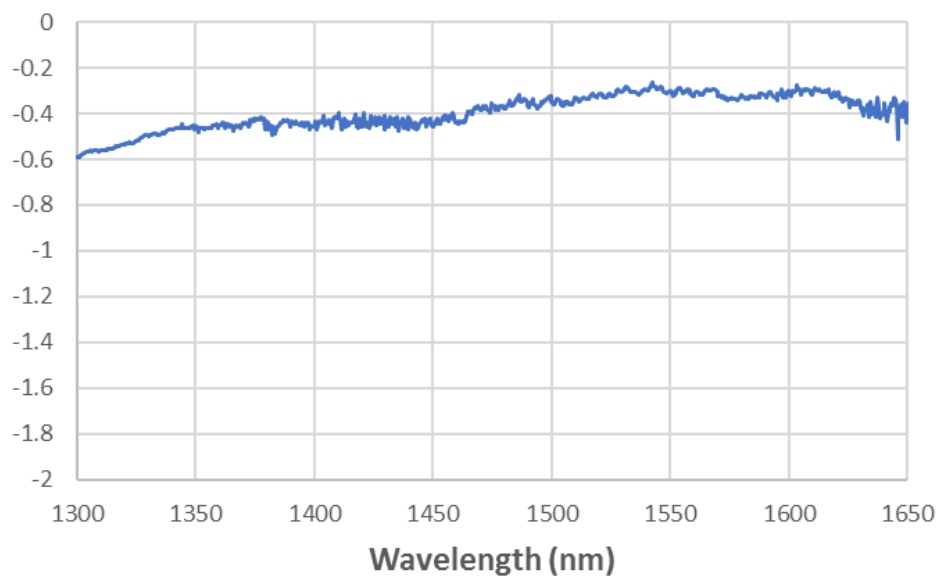


Fiber Optical Variable Reflector



100-0% (780-2200, 500mW)

DATASHEET

Typical Repeatability -Reflection vs Applying Voltage Over 5days (5 colors)

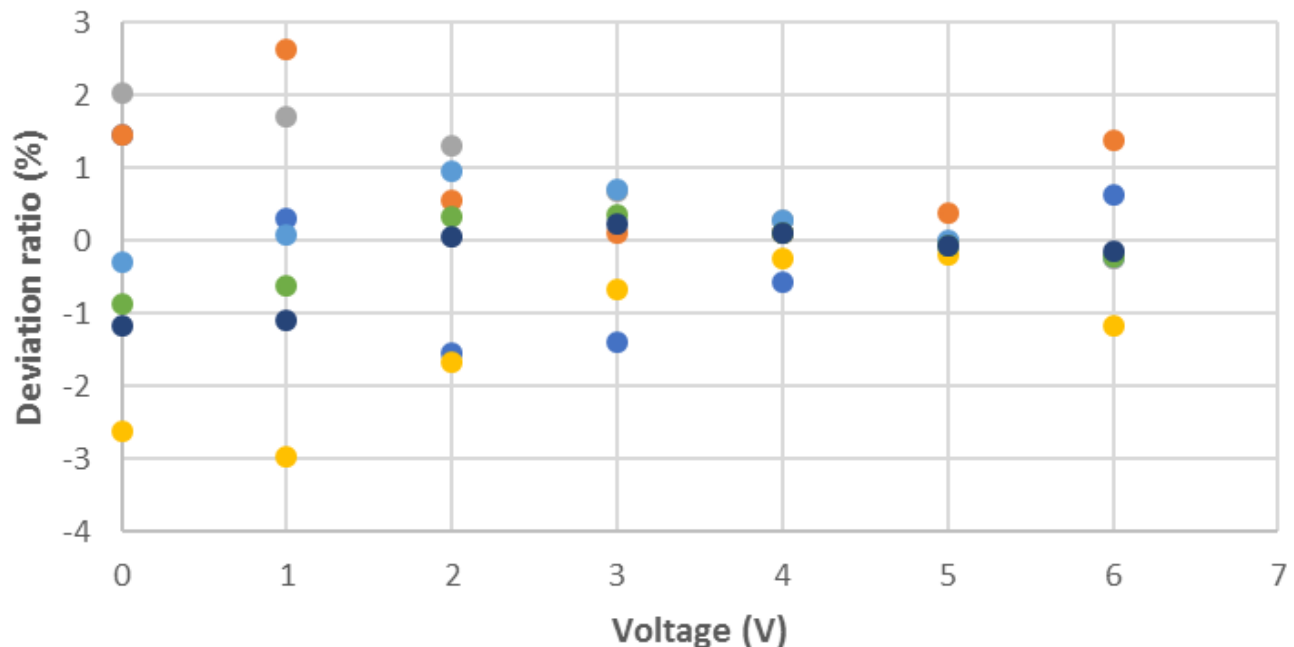

Ordering Information (Part Number)

Prefix	Configuration	Wavelength	Package	Type	Fiber Type **	Fiber Cover	Fiber Length	Connector ^[1]
VRFL-	Special=0	1260~1620 = B 980-1250 = J 770-1100 = C 620-850 = D 600-780 = E 488-635 = G 460-600 = F 850/1310 = A Special = 0	Ø5.5mm = 5	Standard = 1 Special = 0	SMF-28 = 1 PM1550 = B PM980 = E PM780 = F PM850 = K PM630 = I PM460 = J MM 50/125 = 5 MM 62.5/125 = 6 SM450 = M SM460 = H SM600 = N SM630 = G 780HP = P HI1060 = L PM1310 = V	Bare fiber = 1 0.9mm tube = 3 Special = 0	0.5m = 2 1.0m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 LC/PC = 7 LC/APC = A LC/UPC = U Special = 0

[1]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.


Fiber Optical Variable Reflector



100-0% (780-2200, 500mW)

DATASHEET

Typical Electrical to Optical Response

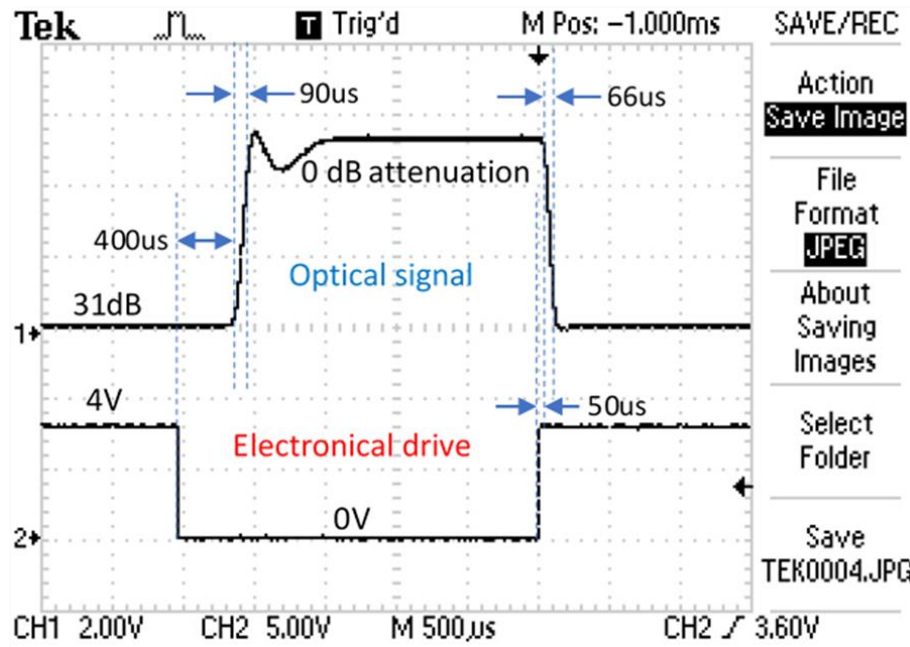

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters ($<5 \mu\text{m}$) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.