

Variable Fiber Optical Splitter/Coupler Array


(1x2, 2x2, SM, PM, Bidirectional)

(Protected by U.S. patent 7,403,677B1 and pending patents)



DATASHEET

BUY NOW

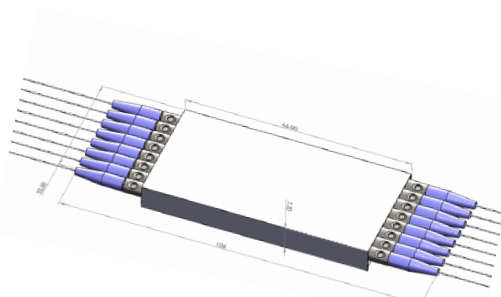

Features

- High Speed
- High Reliability
- Low Loss
- Compact

Applications

- Instrumentation
- Power balance
- Sensor

The Variable Fiber Optical Splitter splits an incoming optical signal among two output optical fibers with a continuously variable ratio controlled by a electrical input voltage from 0 to 5V. When the electrical control signal is removed, the splitter returns to a pre-determined ratio with a standard version of 100:0. The device is bidirectional, transmitting light in both direction simultaneously. The all-solid-state crystal design provides high reliability. The Variable Fiber Optic Splitter has passed Telcordia reliability qualification tests. It is designed to meet the most demanding requirements of ultra-high reliability, fast response time, and continuous operation.

The unit is mounted on a driving board having a control signal input SMA connector and a wall plug-in power supply. Available with several electronic driver having performance optimized for various repetition rate.

Specifications

Parameter	Min	Typical	Max	Unit
Central Wavelength	450		2000	nm
Insertion Loss ^[1]	1260~1650nm	0.6	1	dB
	900~1260nm	0.8	1.3	dB
	760~900nm	1	1.5	dB
	650-850	1.5	1.9	dB
	450-580	2	2.5	dB
Cross Talk at 100% splitter ^[2]	20	25	35	dB
Splitting Variation	Output 1	100~0		%
	Output 2	0~100		%
Type	Continuous			
Response Time (Rise, Fall)			1000	ns
Repetition Rate ^[3]	DC	20	1000	kHz
Polarization Dependent Loss		0.1	0.35	dB
IL Temperature Dependency		0.25	0.5	dB
Polarization Mode Dispersion		0.1	0.2	ps
Return Loss	45	50	60	dB
Operating Temperature	-5		70	°C
Optical Power Handling ^[4]		300		mW
Storage Temperature	-40		85	°C

Notes:

[1]. Excluding connectors.

[2]. Cross talk is measured at 5kHz, which may be degraded at the high repeat rate.

[3]. High repetition rate (up to 100 kHz) is available.

[4]. Defined at 1310/1550nm. For the shorter wavelength, the handling power may be reduced.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 01/11/24

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.

Variable Fiber Optical Splitter/Coupler Array


(1x2, 2x2, SM, PM, Bidirectional)

(Protected by U.S. patent 7,403,677B1 and pending patents)



DATASHEET

Mechanical Dimensions (mm)

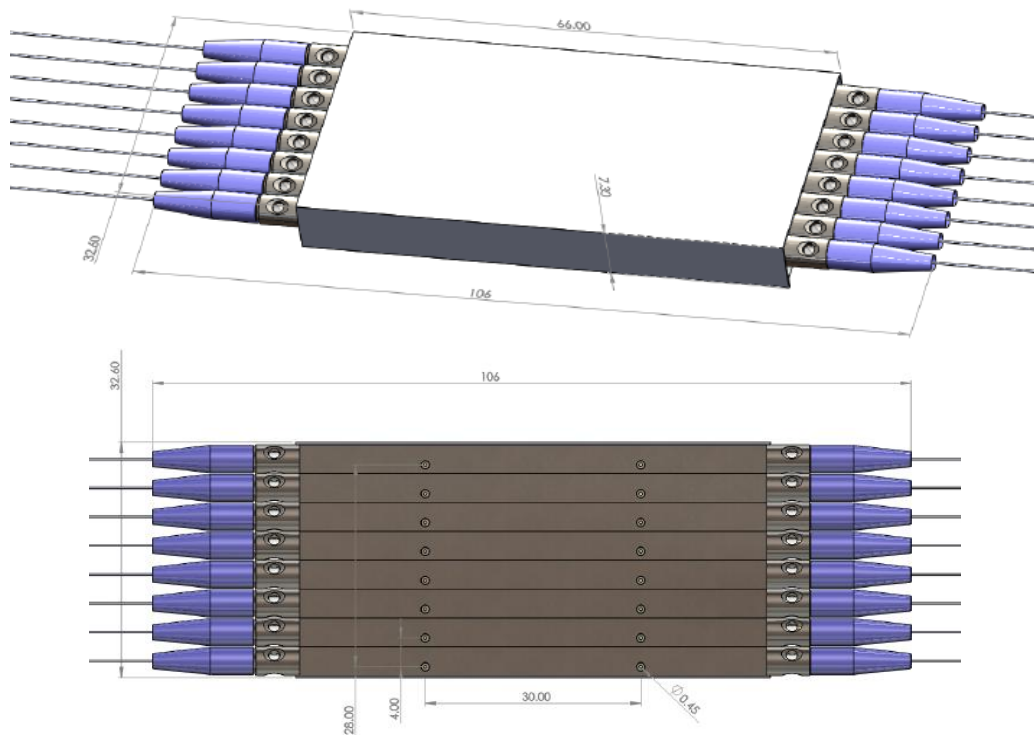

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Driving Board Selection

Maximum Repetition Rate	Part Number (P/N)
20 kHz	
100 kHz	

Operation Instruction

1. Plug in the accompanied power supply
2. Plug in a 0-5V control signal to the input SMA connector (golden color). One can use a DC power supply first, and then a function generator. The optical output will change from maximum to minimum or from minimum to maximum depending on which port is measured.
3. Do not adjust settings on the board

Variable Fiber Optical Splitter/Coupler Array


(1x2, 2x2, SM, PM, Bidirectional)

(Protected by U.S. patent 7,403,677B1 and pending patents)




DATASHEET

Wavelength Dependence

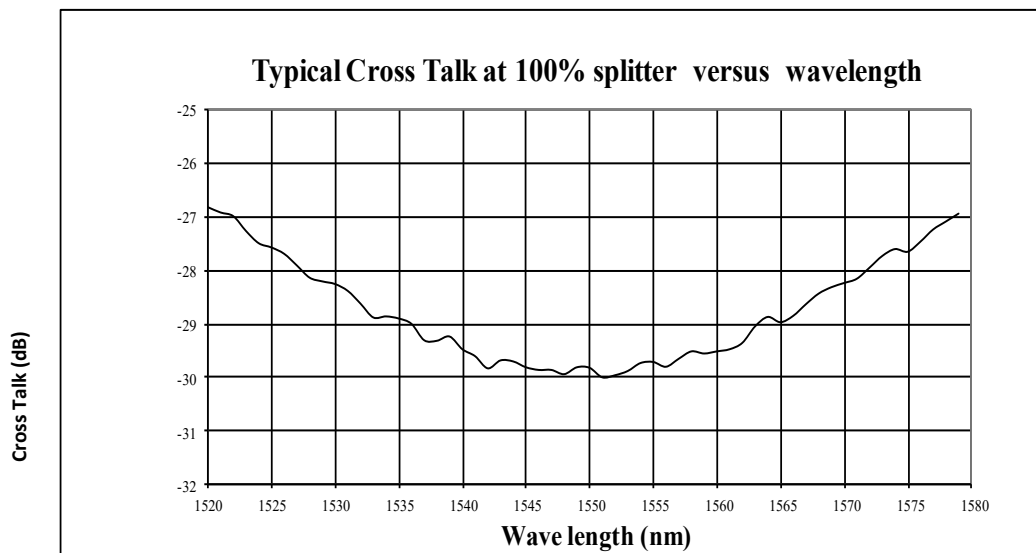

Typical Attenuation versus Voltage

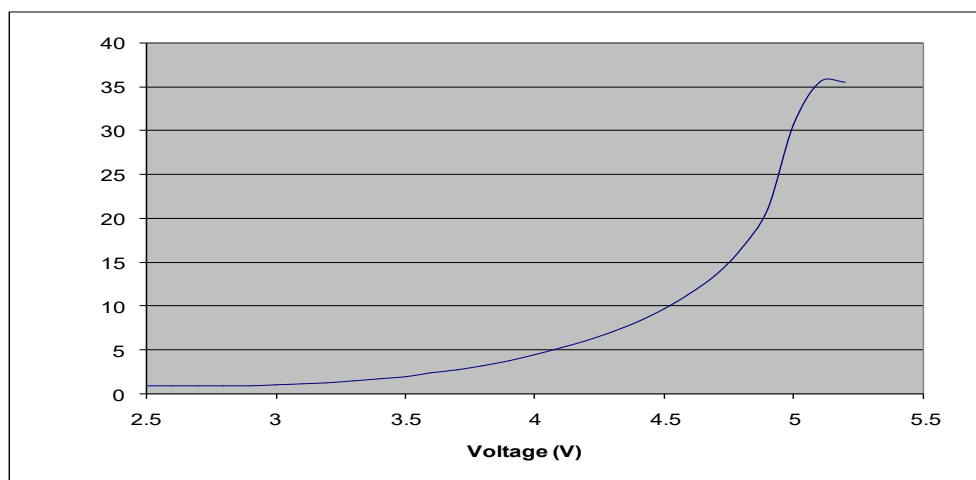

Variable Fiber Optical Splitter/Coupler Array



(1x2, 2x2, SM, PM, Bidirectional)

(Protected by U.S. patent 7,403,677B1 and pending patents)

DATASHEET

Ordering Information (Part Number)

Prefix	Type	Wavelength	Repetition	Channel	Fiber Type	Fiber Cover	Fiber Length	Connector ^[1]
NSVS-	1x2 = 12 2x2 = 22	1060 = 1 2000 = 2 1310 = 3 1480 = 4 1550 = 5 1625 = 6 780 = 7 850 = 8 650 = E 550 = F 400 = G 1565~1620 = L Special = 0	20kHz = 2 100kHz = 3	1 = 1 2 = 2 3 = 3 4 = 4 5 = 5 6 = 6 7 = 7 8 = 8	SMF-28 = 1 HI1060 = 2 HI780 = 3 PM1550 = 5 PM850 = 8 PM980 = 9 Special = 0	Bare fiber = 1 900um tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 LC/PC Duplex = 8 LC/APC = 9 LC/UPC = U Special = 0

[1]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters (<5 μm) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.