


12.5× Zoom Lens Parameter																	
Number		Manual + coaxial zoom lens															
Magnification		0.58×~7.5×															
Working Distance		77.4±2mm															
Optical Magnification		0.58×	0.6×	1.0×	1.5×	2.0×	2.5×	3.0×	3.5×	4.0×	4.5×	5.0×	5.5×	6×	6.5×	7×	7.5×
DOF(mm)		2.75	2.67	0.95	0.43	0.27	0.2	0.15	0.12	0.1	0.081	0.073	0.066	0.061	0.056	0.052	0.05
N.A.		0.025	0.025	0.043	0.063	0.074	0.082	0.09	0.097	0.1	0.11	0.11	0.11	0.11	0.11	0.11	0.11
F.No.		12.5	12.5	11.85	11.95	13.65	15.3	16.5	18.4	19.9	20.4	22.45	22.7	26.8	29.4	31.7	33.9
Resolution(μm)		13	13	7.8	5.3	4.53	4.09	3.73	3.46	3.36	3.05	3.05	3.05	3.05	3.05	3.05	3.05
TV Distortion		0.050%	0.050%	0.002%	0.010%	0.020%	0.003%	0.020%	0.20%	0.018%	0.020%	0.010%	0.010%	0.001%	0.010%	0.005%	0.005%
FOV(mm)D×H×V	Diagonally	18.97	18.33	11.00	7.33	5.50	4.40	3.67	3.14	2.75	2.44	2.20	2.00	1.83	1.69	1.57	1.47
	Horizontal Line	15.17	14.67	8.80	5.87	4.40	3.52	2.93	2.51	2.20	1.96	1.76	1.60	1.47	1.35	1.26	1.17
	Vertical Line	11.38	11.00	6.60	4.40	3.30	2.64	2.20	1.89	1.65	1.47	1.32	1.20	1.10	1.02	0.94	0.88
Max. Sensor Size		2/3"															
Mount		C-Mount															
Mode of zoom		Manual Zoom															
Focus Adjustment		/															
Operating Environment		Temperature-10°C~+50°C; Humidity: 30-80% (no Condensation)															

- Professional optical design, optical magnification 0.58x-7.5x, magnification ratio 12.5:1.
- Big FOV application, based on 2/3" camera.
- Compact structure, easy to assemble and install.

The integrated motorized control system is suitable for all of these zoom lenses. The motorized control system can control single or dual shafts via RS232 or USB. The underlying software code for the OEM platform will also be provided.

It can be used in semiconductor, automation, electronic communication and other industries.

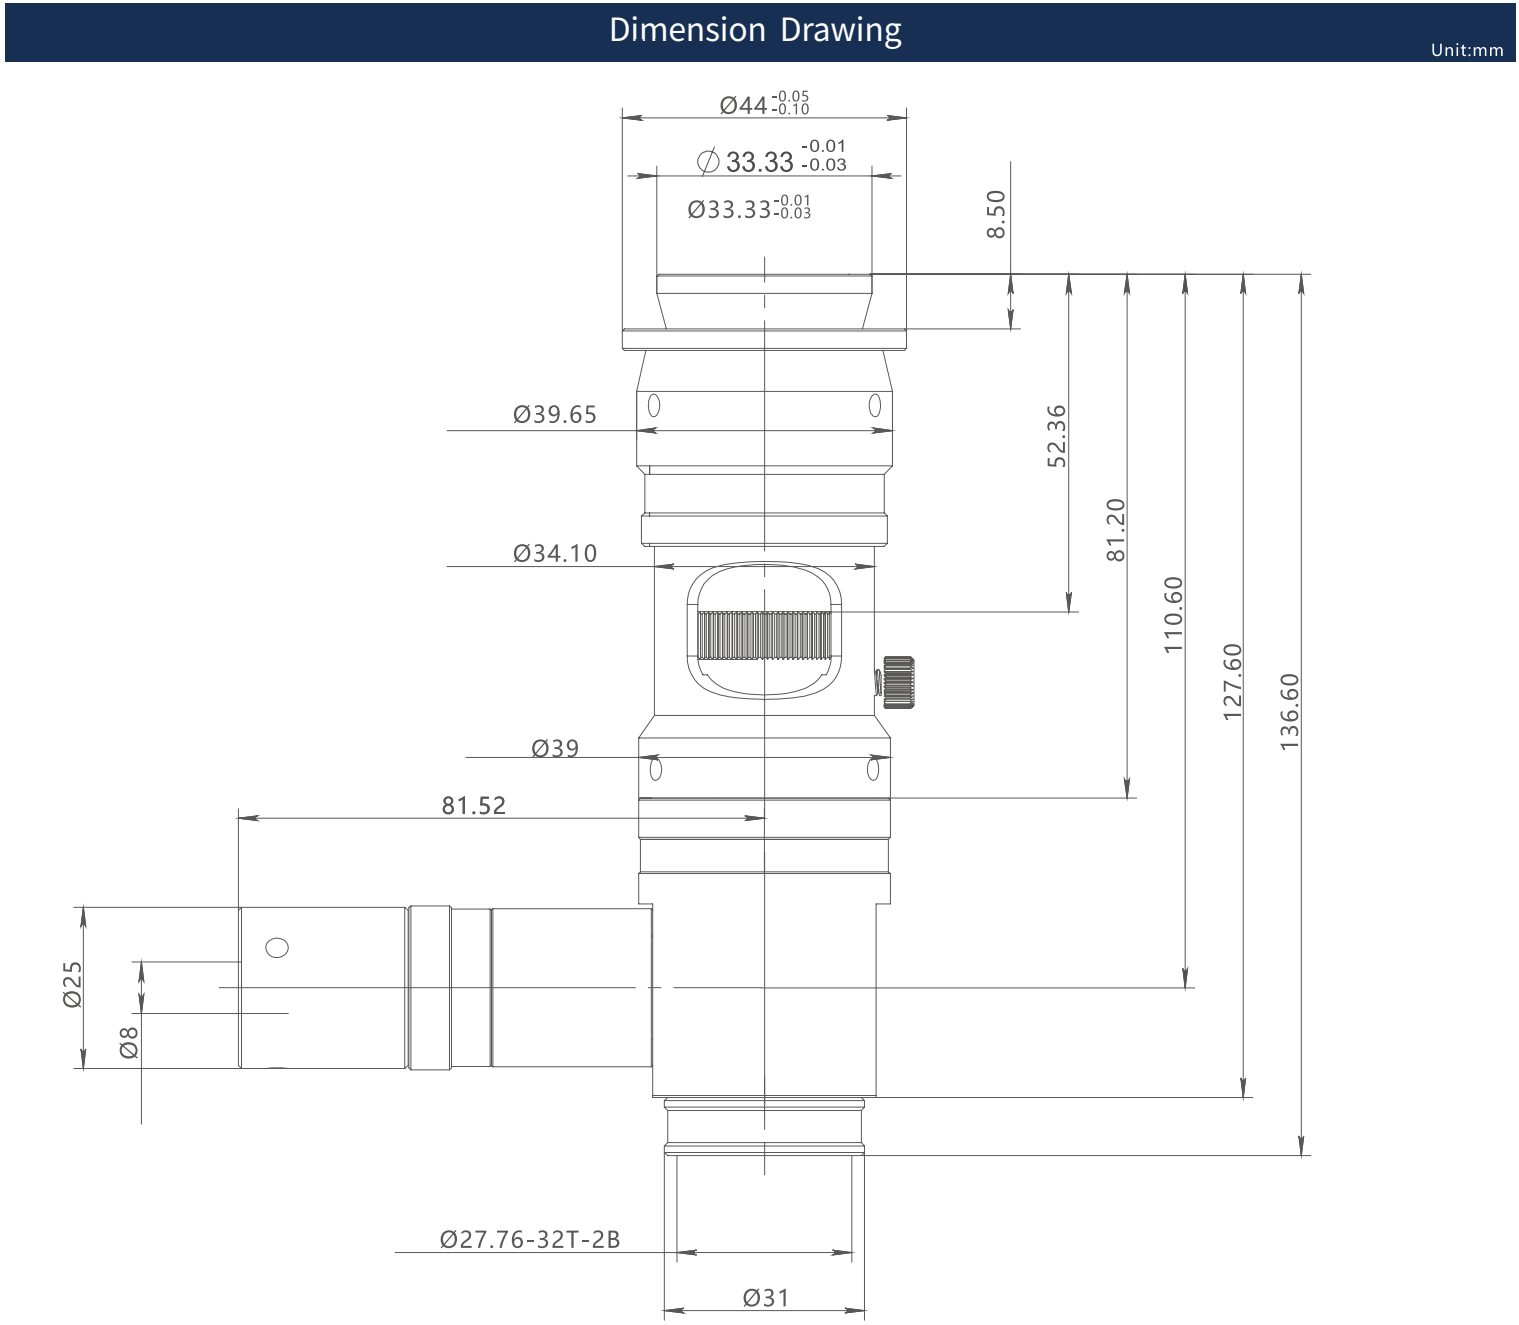

Product Cases

Bonding Machine