

EO-XS-355/1~50μJ/1~2W


LD PUMPED ALL-SOLID-STATE EOM Q-SWITCHED LASER AT 355 nm

All solid state EOM Q-switched laser at 355 nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in marking, carving, measure, research and so on.




SPECIFICATIONS

Wavelength (nm)	355±1
Operating mode	Electro-optic Q-switched
Average power (W)	1~2W (2W@40kHz) Average power (W) = Single pulse energy (mJ) * Rep. rate (kHz)
Single pulse energy (μJ)	1~50(50μJ @40kHz)
Rep. rate (kHz)	1~100
Pulse duration (ns)	~4@40kHz
Peak power (kW)	1~12.5(12.5kW@40kHz)
Ave power stability (over 4 hours)	<5%, <3%
Warm-up time (minutes)	<10
Beam divergence, full angle (mrad)	<3
Beam diameter at the aperture (1/e2,mm)	~1.5
Beam height from base plate (mm)	101
Cooled method	Air cooled
Operating temperature (°C)	10~35
Power supply (220/110VAC)	PSU-AOM(3U)
Expected lifetime (hours)	10000
Warranty period	1 year




EO-XS-355

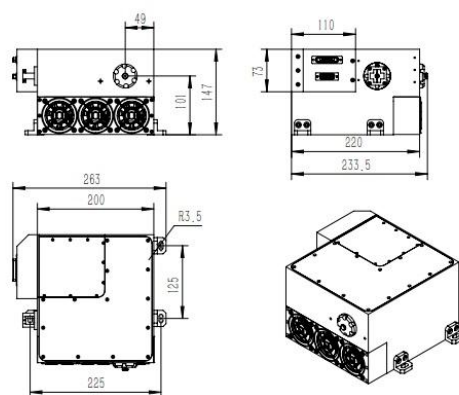

265(L)×233.5(W)×147(H) mm³, 5kg

PSU-AOM (3U)

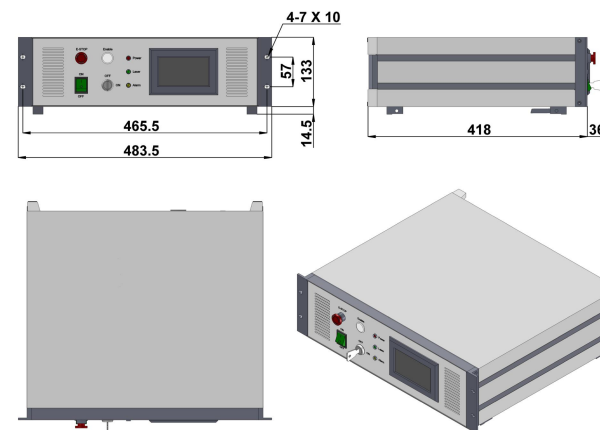

483.5 (L) ×454 (W) ×147.5 (H) mm³, 8.3 kg

Website: <http://www.cnilaser.com> E-mail: sales@cnilaser.com Tel: +86-431-85603799 Fax: +86-431-87020258