



MLL-U-xxx-SU series (900-1000nm)



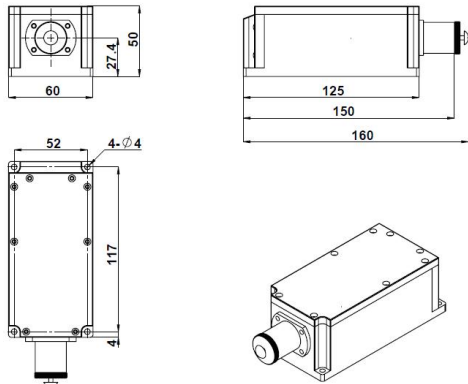
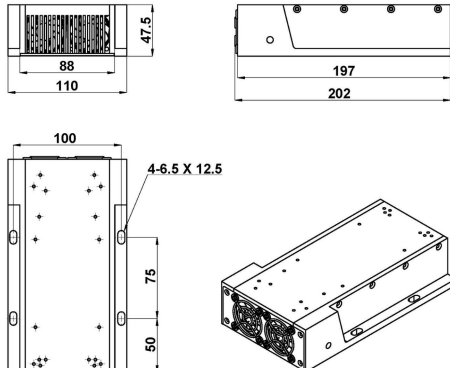
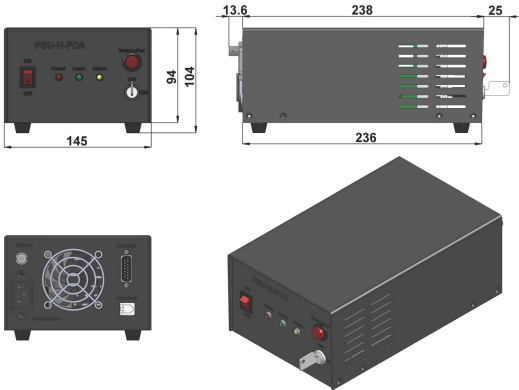
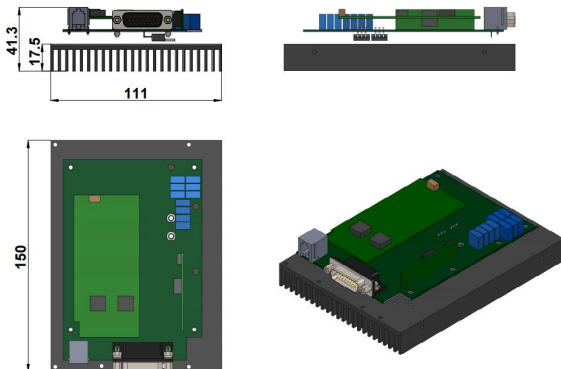
LOW NOISE INFRARED LASER

The all-solid-state, low-noise infrared laser features an ultra-compact design, a long lifetime, and easy operation. It is widely used in scientific experiments, optical sensing, measurement, instrumentation, communication, spectral analysis, and more.



SPECIFICATIONS

Wavelength (nm)	914±1		946±1	
Operating mode	CW			
Output power (mW) ¹	1-200	200-400	1-150	150-300
Power stability (rms, 4 hours ±3°C)	<3%, <2%, <1%,	<3%, <2%	<3%, <2%, <1%	<3%, <2%
Spectral line width (nm)	<1.0, <0.1, (<0.006 optional@1-200)		<1.0, <0.1, (<0.006 optional@1-150)	
Transverse mode	TEM ₀₀			
Noise of amplitude (rms, 20Hz-20MHz)	<1%			
M ²	<1.2		<1.5	
Beam diameter at the aperture (1/e ² , mm)	~1.5			
Beam divergence (mrad)	<1.5			
Polarization ratio	>100:1, Horizontal (Vertical optional)		/	
Warm-up time (minutes)	<5			
Pointing stability (μrad) (over 2 hours after warm-up and ±3°C)	<50			
Beam height from base plate (mm)	27.4			
Operating temperature (°C)	10-35			
Power supply (100-240VAC)	PSU-H-FDA			
Power supply (12VDC)	PSU-SR-OEM (12V/25A)			
Expected lifetime (hours)	>10000			

LASER HEAD ²	HEATSINK (optional TC-02-FS)
 160(L)×60(W)×50(H) mm³, 0.9kg	 202(L)×110(W)×47.5(H) mm³, 1.25kg
POWER SUPPLY (PSU-H-FDA) ³	DRIVER (PSU-SR-OEM) ³
 276.6(L)×145(W)×103.6(H) mm³, 2.3kg	 150(L)×111(W)×41.3(H) mm³, 0.8kg

1 Any power level can be selected in this range.

2 The laser head needs to be used on a heat sink with good heat dissipation

3 Fixed output power.