

Fiber Coupled Laser Multimode High Power



793nm, 808nm, up to 340W, 200μm 0.22NA Fiber

DATASHEET

[Return to the Webpage](#)



Features

- High Sensitivity and Overload Power with Wide Dynamic Range
- High Coupling Efficiency
- Isolated Electrical Contacts
- High Quality, High Reliability and Stability

Applications

- OCT
- Medical care
- Printing
- Material processing
- Pump source



Warning: The device can be damaged by a spike in applying voltage. Do not touch by hand or use a regular power supply. The device mounted on PCB is a cost-effective OEM module for professional system integration only, not intended for laboratory use, which be a protected turn-key boxed package. Information is believed to be accurate and is subject to change without notice. Some specific combinations of options may not be available. The user assumes all risks and liability in connection with the use of a product or its application.

Rev 02/08/26

The FCMH series diode lasers deliver up to 500 W of power through a 200 μm fiber. They provide high brightness and simplified thermal management by distributing the diodes (heat sources), allowing for a water-cooled architecture with reliable, predictable performance. A turn-key benchtop unit is available, integrating the power supply, water cooling, power control, and safety shut-off features.

Due to their high sensitivity to electrostatic discharge, warranty coverage applies only to fully metal covered modules the benchtops, which include proper protection. Other versions of the lasers and photodetectors are not covered by any warranty. Please use them with great caution.

Specifications (793nm, up to 340W, 200μm 0.22NA Fiber)

Parameter	Min	Typical	Max	Unit
Center Wavelength λ	783	793	803	nm
Output Power			340	W
Working mode		CW		
Fiber Core Diameter		200		μm
Fiber Numerical Aperture		0.22		NA
Fiber Connector		Bare end		
Fiber Length		1		m
Operating Current Iop		12		A
Threshold Current Ith		2		A
Operating Voltage Vop		73		V
Operating Temperature		25		°C
Wave Temp Coefficient		0.3		nm/°C

Specifications (808nm, up to 200W, 200μm 0.22NA Fiber)

Parameter	Min	Typical	Max	Unit
Center Wavelength λ	803	808	913	nm
Output Power		200		W
Spectral Width FWHM		5		nm
Operating Current Iop		4		A
Threshold Current Ith		0.7		A
Operating Voltage Vop		1.7		V
Power Conversion Efficiency		~45%		%
Fiber Bend Radius	60			mm
Buffer Diameter		320		μm
Fiber Cladding Diameter		220		μm
Fiber Core Diameter		200		μm
Fiber Numerical Aperture		0.22		NA
Fiber Connector		FC/SMA905/ST		
Fiber Length		1		m
Operating Temperature	15		55	°C
Storage Temperature	-30		70	°C
Lead Soldering Temperature, 10 Sec max		250		°C

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [\[click this link\]](#):

*The contact resistance between the diode and the heat sink is less than 1cm² K/W.

P +1 781-935-1200

E sales@agiltron.com


W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.

793nm, 808nm, up to 340W, 200μm 0.22NA Fiber

DATASHEET

Mechanical Dimensions (mm) 200W

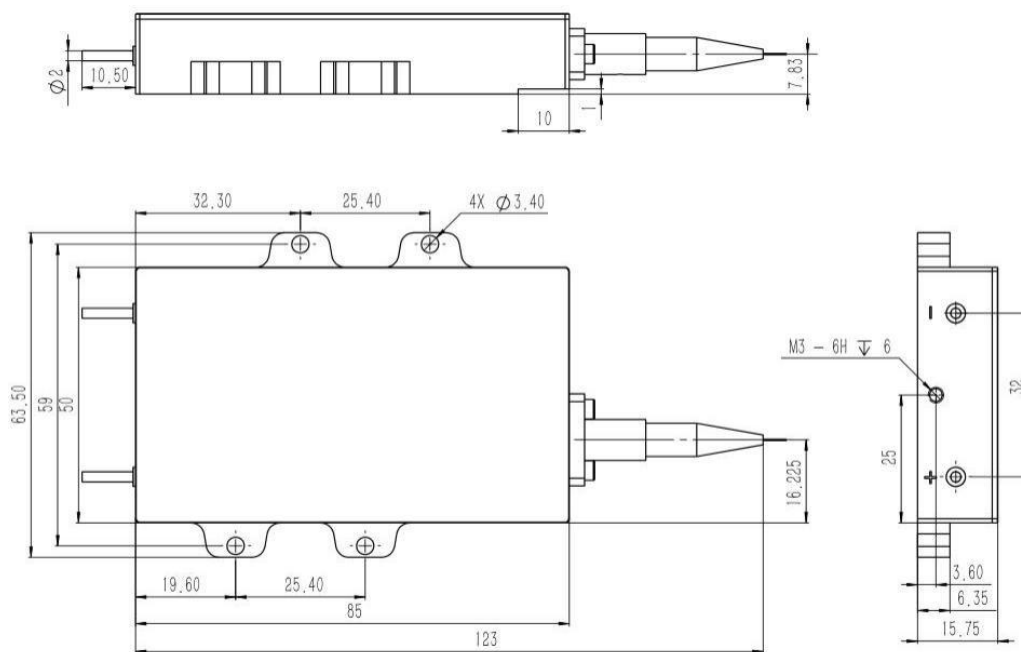

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Ordering Information (Part Number)

	□ □ □	□ □	□	□	□	□	□
Prefix	Wavelength	Output Power	Package	Fiber Type	Fiber Buffer	Fiber Length	Connector ^[1]
FCMH-	793nm = 793	3W = 03	A = A	200 μm = 2	0.9mm Tube = 1	0.5m = 1	Non = 1
	808nm = 808	10W = 01		400 μm = 4	3mm Tube = 3	1m = 2	SMA = 2
		50W = 05		135 μm = 1	Armor = A	1.5m = 3	
		100W = 10					
		200W = 20					
		250W = 25					
		300W = 30					
		320W = 32					
		340W = 34					
		900W = 90					

[1]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

Fiber Coupled Laser Multimode High Power



793nm, 808nm, up to 340W, 200μm 0.22NA Fiber

DATASHEET

Benchtop Turnkey Unit



The HPML series High Power Fiber Coupled Laser Source is a turn-key unit, featuring ease of use and low cost with a manual or USB/GUI control. These all-in-one benchtop lasers integrate a laser, output tap monitor, controller, and heat dissipator, providing a convenient and reliable high-power laser source. The control has three options: low-cost constant current mode, and feedback constant output mode (having an output monitor). The unit can generate pulse output via modulating the laser directly (power and duration are settable via USB interface). Moreover, we offer a red-laser integrated fiber output for visual aid as well as a collimator at the fiber end options. A safety interlock is provided at the back. For power below 50W, the unit is cooled with internal fans. For higher power water cooling is required. We further offer matching chiller.

For details please click: <https://agiltron.com/product/high-power-fiber-coupled-laser-source-multimode/>

Ordering Information (Part Number)

	☐	☐ ☐ ☐	☐	☐	☐	☐	☐	☐	☐	☐
Prefix	Wavelength	Power	Feedback *	Red Laser **	Cooling	Modulation	Fiber Core	Fiber Length	Connector ^[1]	Collimator ***
HPML-	980nm = 9	5W = AA5	No = 1	No = 1	Fan = 1	No = 1	135μm = 1	0.25m = 1	No = 1	No = 1
	880nm = 8	8W = AA8	Yes = 2	Yes = 2	Water = 2	Yes = 2	200μm = 2	0.5m = 2	SMA = 2	Yes = 2
	808nm = 7	10W = A10					105μm = 5	1m = 3	Special = 0	
	650nm = 6	22W = A12					400μm = 4	1.5m = 4		
	532nm = 5	...					Special = 0	2m = 5		
	455nm = 4	100W = 100						Special = 0		
	355nm = 3	...								
	967nm = B	200W = 200								
	915nm = A	280W = 280								
	Special = 0	500W = 500								

* Feedback control automatically maintains a constant laser power \$2350

** This option provided visual of the laser spot. \$980

*** Collimator selections go to <https://agiltron.com/product/high-power-fiber-optic-collimator/>

[1]. The default connector configuration uses fiber with 0.9 mm buffer protection. The connector cannot be installed directly onto bare fiber because the bare fiber is prone to damage during shipping. However, the connector can be assembled on bare fiber if a 3 cm protective loose tube is added for reinforcement. The customer may remove this protective tube after testing. The optical power handling of a standard connector is less than 0.5 W for SMF-28 fiber and decreases further for smaller-core fibers.

+1 781-935-1200

sales@agiltron.com

www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.


Fiber Coupled Laser Multimode High Power



793nm, 808nm, up to 340W, 200μm 0.22NA Fiber

DATASHEET

Laser Safety

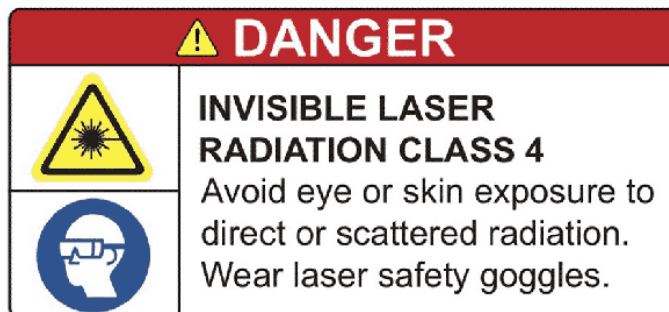

Electrostatic Sensitivity



- Never touch laser diode and the module using hands
- Always use protections when handle a laser diode
- Recommend mounting the laser diode using an ionic gun and ESD finger cots



P +1 781-935-1200

E sales@agiltron.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. We reserve the right to change the design or specifications at any time without notice.
Agiltron is a registered trademark of Optowares Corporation in the U.S. and other countries.